




APPLIANCES SPEC BOOK

WOOD RESIDENCE
3/31/2026

KITCHEN

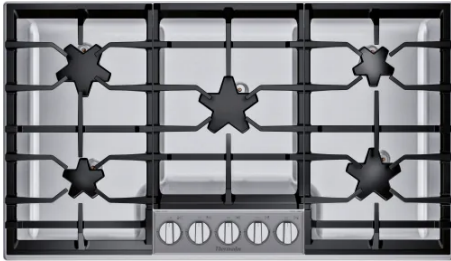

Thermador SGSXP365TS

Masterpiece® 36 Inch Wide 5 Burner Gas Cooktop with Pedestal Star® Burners and ExtraLow® Select Burner

Finish: Stainless Steel

Qty: 1



Thermador MED302LWS

Masterpiece® 30 Inch Wide 9 Cu. Ft. Double Electric Oven with Left Side Opening Door

Finish: Stainless Steel

Qty: 1



Thermador DWHD660EPR

Sapphire 24 Inch Wide 16 Place Setting Built-In Panel Ready Top Control Dishwasher with Star Dry

Finish: Panel Ready

Qty: 1



Thermador MD24BS

24" Microdrawer Microwave

Finish: Stainless Steel

Qty: 1



Thermador WD30W

30 Inch Wide Electric Warming Drawer with SoftClose®

Finish: Panel Ready

Qty: 1



Avalon ARHI34SAA

90 - 600 CFM 36 Inch Wide Range Hood Insert with an 18 Inch Depth

Finish: Stainless Steel

Qty: 1



Sub-Zero CL4850UFD/O

Over-and-Under 48 Inch Wide 28.9 Cu. Ft. Panel Ready French Door Refrigerator with Adjustable Crisper Bins


Finish: Panel Ready

Qty: 1

SGSXP365TS

36-INCH GAS COOKTOP

MASTERPIECE® PEDESTAL STAR® BURNER COLLECTION

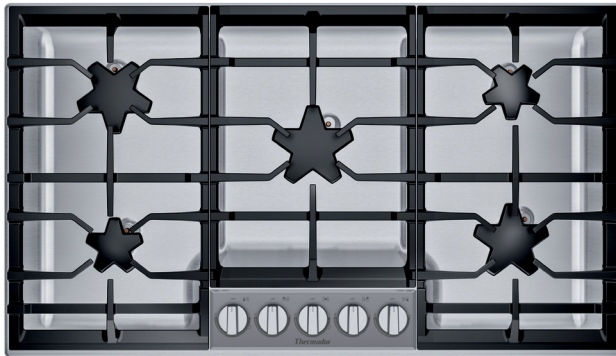

FEATURES & BENEFITS

- ★ - Patented Star® Burner's unique five-point design offers more ports and more flame distribution than a round burner
- ★ - QuickClean Base® with a teardrop emboss reduces food buildup near the base and contains liquid spills for quick cleaning
 - Raised pedestal burner allows a hand or sponge to fit easily under each burner to wipe the surface clean
- ★ - ExtraLow® Select burner with 5 precise settings is perfect for simmering or holding foods and melting chocolate without scorching or burning
- ★ - Progressive illuminated light ring around each knob indicates burners in use

ACCESSORIES (OPTIONAL)



SWOKRINGW
Wok Ring



SKNOBLUW
Metallic Blue Knob Kit



SNPKITPEDW
LP Conversion Kit

GENERAL PROPERTIES

Controls	Metal Knobs
Sealed Burners	Yes
Grate Material	Cast Iron

BURNER PERFORMANCE

Total BTU Load (NG / LP)	60,200 / 45,200 BTU
Power of Front Left Burner (NG / LP)	9,100 / 6,000 BTU
Power of Back Left Burner (NG / LP)	12,000 / 9,100 BTU
Power of Center Burner (NG / LP)	18,000 / 15,000 BTU
Power of Back Right Burner (NG / LP)	9,100 / 6,000 BTU
Power of Front Right Burner (NG / LP)	12,000 / 9,100 BTU

TECHNICAL DETAILS

Watts (W)	1,800 W
Circuit Breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type	3 Prong
Power Cord Length (in)	60"
Energy Source	Gas
Convertible To LP (Kit Required)	Yes

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD) (in)	5 3/8" x 37" x 21 1/4"
Required Cutout Size (HxWxD) (in)	3 13/16" x 34 15/16" x 19 1/8"
Minimum Distance From Counter Front (in)	1 1/2"
Minimum Distance From Rear Wall (in)	3"
Net Weight (lbs)	41 lbs

WARRANTY

Limited Warranty, Entire Appliance, Parts and Labor	2 Year
---	--------

†To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.


SGSXP365TS

36-INCH GAS COOKTOP

MASTERPIECE® PEDESTAL STAR® BURNER COLLECTION



36-INCH COOKTOP AND CUTOUT DIMENSIONS

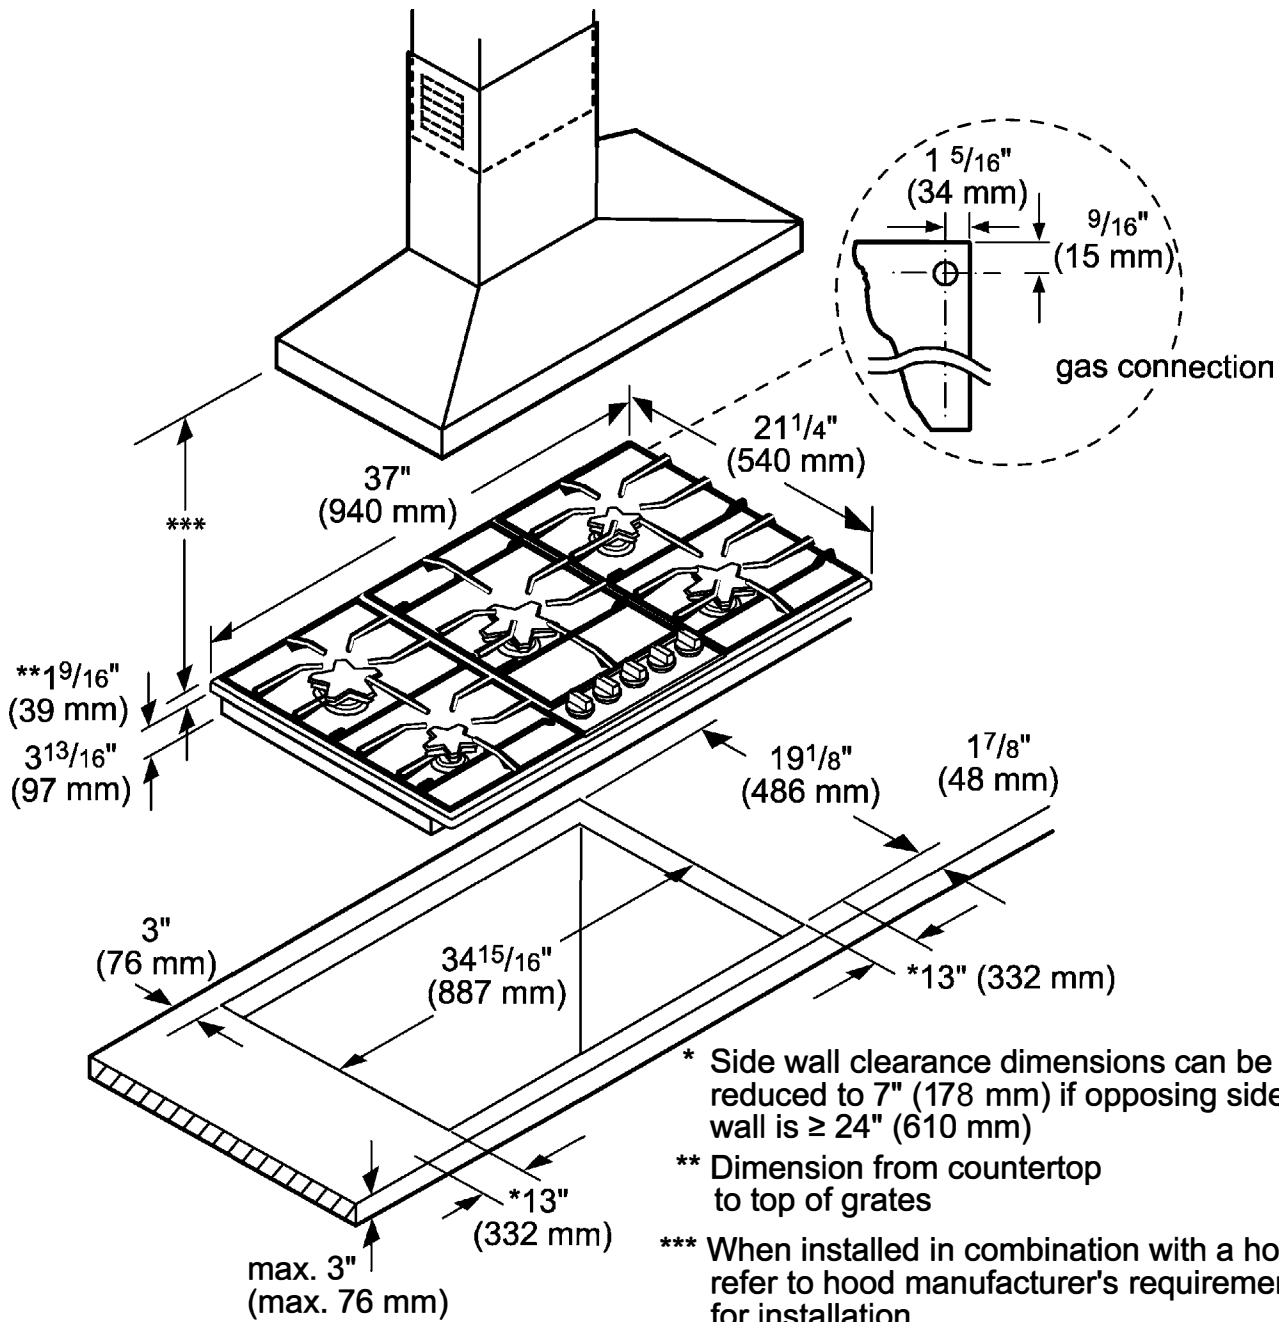

measurements in inches (mm)

SGSXP365TS


36-INCH GAS COOKTOP

MASTERPIECE® PEDESTAL STAR® BURNER COLLECTION

Thermador

★

CABINET REQUIREMENTS

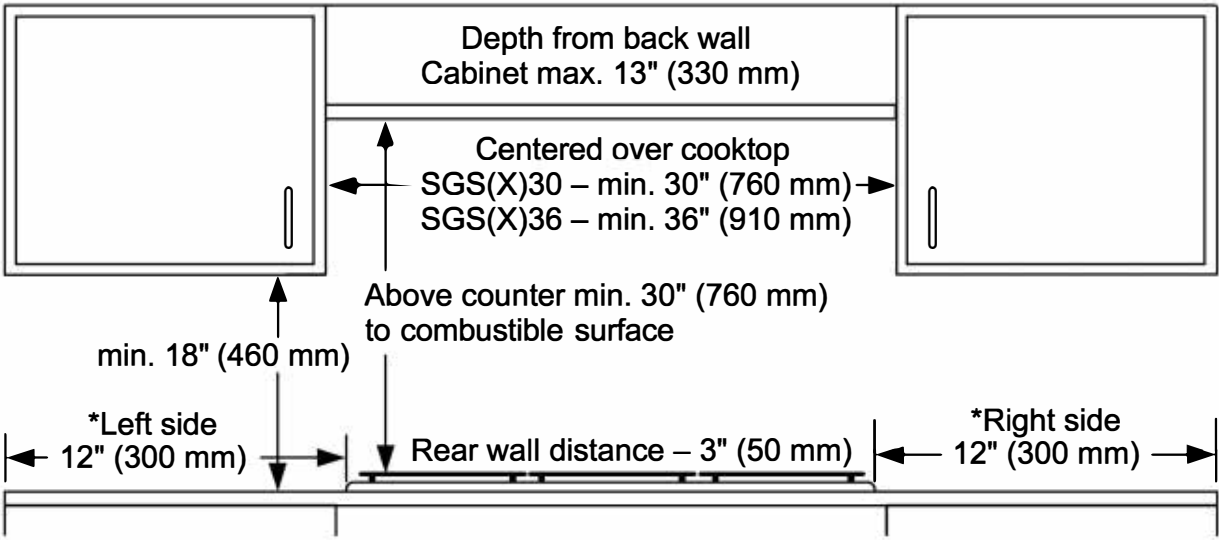

* Side wall clearance dimensions can be reduced to 6" (152 mm) if opposing side wall is ≥ 23" (584.2 mm)

measurements in inches (mm)

INSTALLATION ABOVE A THERMADOR WALL OVEN

Product Type	A Inches (mm)	B min. Inches (mm)	C max. Inches (mm)
Conventional Oven	28 1/4 (718)	31 1/4 (794) min.	4 3/4 (121)
Steam Oven	25 1/16 (636)	28 1/16 (713)	7 15/16 (202)
Steam Oven with 4" Storage Drawer*	28 1/4 (718)	31 1/4 (794) min.	4 3/4 (121)
Microwave / Speed Oven	19 1/4 (488)	24 (609) min.	12" (306)
Microwave / Speed Oven with Warming drawer*	28 1/4 (718)	31 1/4 (794) min.	4 3/4 (121)

When installing an oven or oven with a drawer in combination with a cooktop, a minimum distance between the cabinet floor and countertop (B) is required. Reference the table for dimensions. Refer to the oven installation guide for all other measurements.

MED302LWS

30-INCH DOUBLE BUILT-IN OVEN

MASTERPIECE® COLLECTION, LEFT SIDE OPENING DOOR



Home Connect

ALSO AVAILABLE:

MED302RWS – Right Side Opening Door

FEATURES & BENEFITS

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility—standard or flush installation into kitchen cabinets
- Ergonomically designed side opening door for better access to oven cavity
- Commercial style rotisserie with 12 pound capacity
- Multi-point Meat Probe to better capture temperature in roast and poultry
- Fast 2-hour self clean mode

ACCESSORIES (INCLUDED)

Upper Cavity: 3 Telescopic Racks, Multi-point Meat Probe, Rotisserie; Lower Cavity: 1 Telescopic Rack and 2 Standard Oven Racks

GENERAL PROPERTIES

Heating Modes – Upper Cavity

(16) Bake, Broil, Max Broil, Roast, Convection Bake, Convection Broil, Max Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast, Rotisserie

Heating Modes – Lower Cavity

(13) Bake, Broil, Roast, Convection Bake, Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast

Sabbath		Yes
Cleaning Type	Upper Cavity Lower Cavity	Easy Clean, Self Clean Easy Clean, Self Clean
Telescopic Rack(s)		4
Illumination Type	Upper Cavity Lower Cavity	Halogen Halogen
Interior Lights	Upper Cavity Lower Cavity	2 2
Home Connect® (Wi-Fi Enabled)		Yes

OVEN PERFORMANCE

Bake / Broil Element	Upper Cavity Lower Cavity	2,400 / 3,800 / 1,000 W 2,400 / 3,800 W
Convection Element	Upper Cavity Lower Cavity	2,000 W 2,000 W

TECHNICAL DETAILS

Watts	9,600 W
Circuit Breaker	40 A
Volts	240 / 208 V
Frequency	60 Hz
Power Cord Length	60"
Plug Type	Fixed Connection, No Plug
Conduit	60" 4-Wire
Energy Source	Electric

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	52 1/16" x 29 3/4" x 24 1/2"	
Trim Overlaps (Top – Sides – Bottom)	3/8" to 2" – 9/16" – 0"	
Required Cutout Size (HxWxD) – Standard	50" – 51 1/2" x 28 1/2" x 23 1/2"	
Required Cutout Size (HxWxD) – Flush	52 3/16" x 30 3/4" x 24 1/2"	
Oven Cavity Size	Upper Cavity Lower Cavity	4.5 cu. ft. 4.5 cu. ft.
Overall Oven Interior Dimensions (HxWxD)	17 3/4" x 24" x 17 7/8"	
Usable Oven Interior Dimensions (HxWxD)	13 1/2" x 21 5/8" x 16 1/4"	
Net Weight	334 lbs	

WARRANTY

Limited Warranty Parts and Labor	2 Year
----------------------------------	--------

MED302LWS


30-INCH DOUBLE BUILT-IN OVEN

MASTERPIECE® COLLECTION, LEFT SIDE OPENING DOOR




30-INCH DOUBLE OVEN

Double Oven Wall Mount Installation
Double Oven Left Hinge

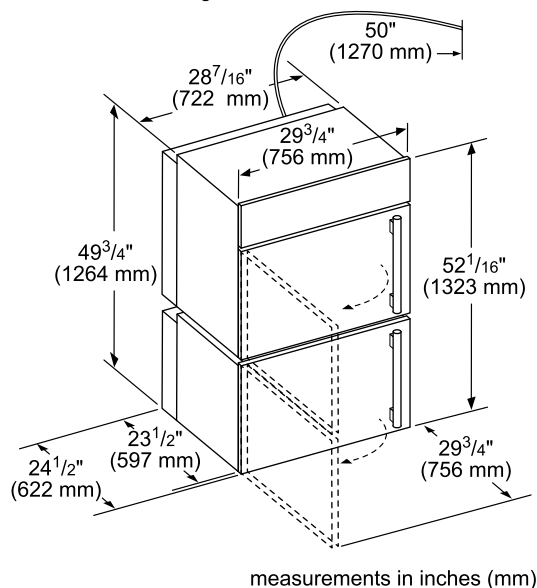


Door Handle Depth*
Masterpiece Series
Side-Hinge Handle



*Protrusion of handle
from door skin

Double Oven
Wall Mount Installation

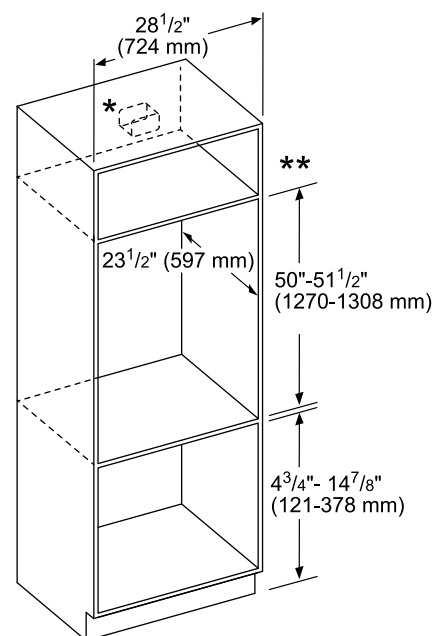


* For double ovens installed into a wall cabinet, the junction box may be located above or beneath the unit within reach of the power cord.


**For oven installation in a wall cabinet, the control panel overlap is a min. 3/8\" (10 mm) to max. 1 1/4\" (25 mm).

measurements in inches (mm)

Double Oven Flush Mount Installation
Top View Left Hinger Door

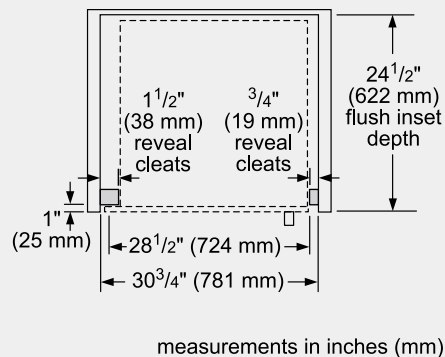

Double Oven Flush Mount Installation
Side View Right Hinge, Left Hinge and
Bottom Hinge

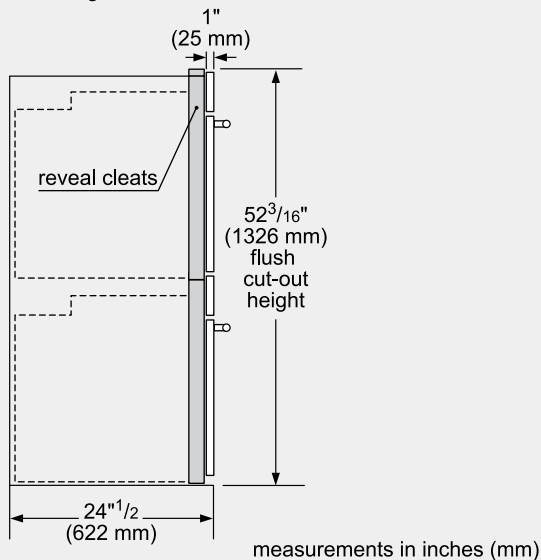

MED302LWS


30-INCH DOUBLE BUILT-IN OVEN

MASTERPIECE® COLLECTION, LEFT SIDE OPENING DOOR




INSTALLATION DETAILS

Standard installation
Single oven, double oven or combo oven over warming or storage drawer

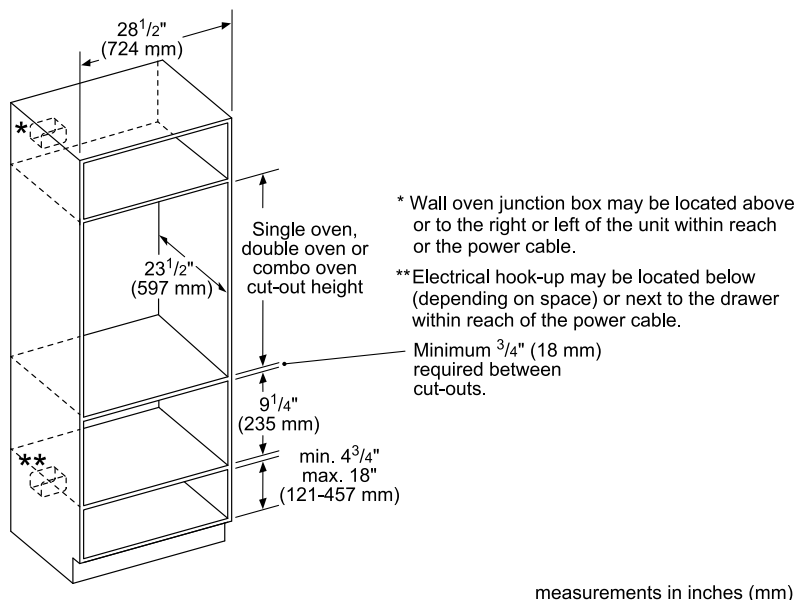

Flush installation
Double or combo oven over storage or warming drawer

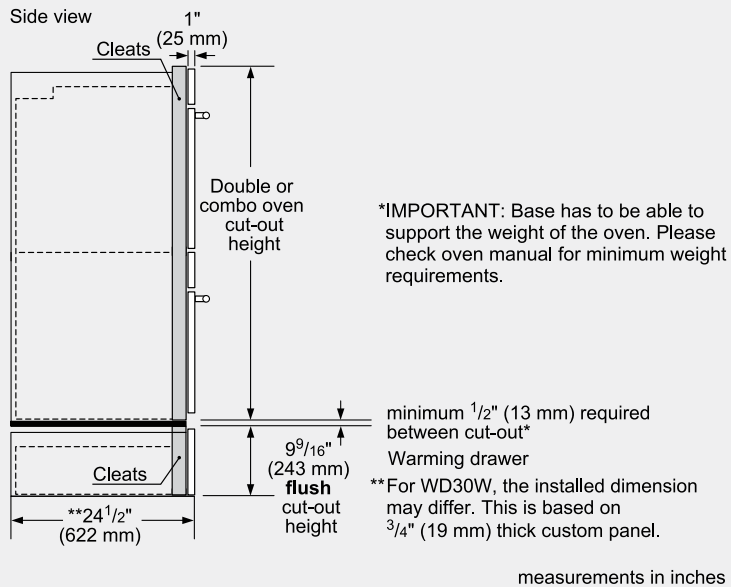

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

DWHD660EPR

SAPPHIRE® DISHWASHER

CUSTOM PANEL



HomeConnect

Also Available:

DWHD660EFP – Flat Stainless Steel Panel with Professional Collection Handle

DWHD660EFM – Flat Stainless Steel Panel with Masterpiece® Collection Handle

FEATURES & BENEFITS

- ★ - StarDry™ — No one dries better. Star Dry with Zeolite: the ultra-powerful program that dries dishes better so place settings, glassware, and even sturdy plastics and containers with hard-to-reach crevices are ready for use immediately after each cycle
- ★ - Sapphire Glow® light illuminates with the sparkling blue light when the dishwasher is open
 - The Zone Control™ Spray Arm amplifies the exceptional PowerWash™ performance by letting you customize the cleaning power to deep clean even the most challenging dishes, in the lower rack.
 - The Blue PowerBeam® projects a blue light onto the floor to indicate when the dishwasher is in use.
 - Adjustable Chef's Tool Drawer® delivers added loading capacity as well as flexibility to accommodate larger or smaller items, wider ends and utensil handles
 - Flexible folding tines fold down to accommodate larger pots, pans, and dishes and add flexibility to hold items twice as wide as previous models and significantly wider than competitor
 - Smooth-glide ball bearing wheels on lower, upper, and third racks
 - Exceptionally Quiet — 44 dBA for a peaceful kitchen experience
 - Use the exclusive Home Connect® app to refine your cleanup routine with remote control and receive timely notifications that keep track of every dish tab so you never run out.
 - Push to Open† uses Auto Door Opening technology to open the door with a push, adding a luxurious touch and the option for a sleek, handle-less design

GENERAL PROPERTIES

Number of Wash Cycles	6 (Auto, Normal, Quick, Hand Wash, Pots & Pans, Favorite)
Additional Wash Cycles in Home Connect®	3 (Machine Care, Rinse, Glass)
Number of Options	4 (Remote Start, Sanitize, StarDry™, ZoneControl™)
Additional Options in Home Connect®	1 (Save Time)
NSF®-Certified* Sanitize Option	Yes
dBA	44 dBA
Third Rack	Adjustable Chef's Tool Drawer®
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Concealed Water Heating Element	Yes
Leak Protection System	24/7 AquaStop®
Water Softener	No
Five-Level Wash	Yes
Childlock	No
Home Connect® (Wi-Fi Enabled)	Yes

EFFICIENCY

Water Usage Per Cycle	3.2 g
CEE Energy Efficiency Class	Tier 1
ENERGY STAR® Certified	Yes
Total Annual Energy Consumption	240 kWh
Total Annual Water Consumption	623.5 g

CAPACITY

Number of Place Settings	16
--------------------------	----

TECHNICAL DETAILS

Watts	1,440 W
Current	12 A
Volts	120 V
Frequency	60 Hz
Power Cord Length	67"
Power Cord Install Length from Corner of Unit when Facing the Door	Left - 45" Right - 56"
Minimum Water Pressure	14 (lb/sin)
Max. Temperature for Water Intake	140° F
Length Inlet Hose	N/A
Length Outlet Hose	90.5"

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	33 7/8" x 23 9/16" x 23 3/4"
Required Cutout Size (HxWxD)	33 7/8" Min. x 24" Min. x 24"
Adjustable Feet	Yes
Net Weight	102 lbs

*Certification to NSF/ANSI Standard 184 for residential dishwashers

†Available on Custom Panel Ready sku only


DWHD660EPR
SAPPHIRE® DISHWASHER
CUSTOM PANEL



WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

ACCESSORIES (OPTIONAL)	
Dishwasher Installation Kit (Junction Box, 90° Elbow and Water Supply Hose)	SMZ3IN1UC
Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010UC
Junction Box	SMZPCJB1UC
Cabinet Protector with Power Cord Clip	SMZEPCC1UC
Water Supply Hose	SMZSH1ABUC

DISHWASHER & CUTOUT DIMENSIONS

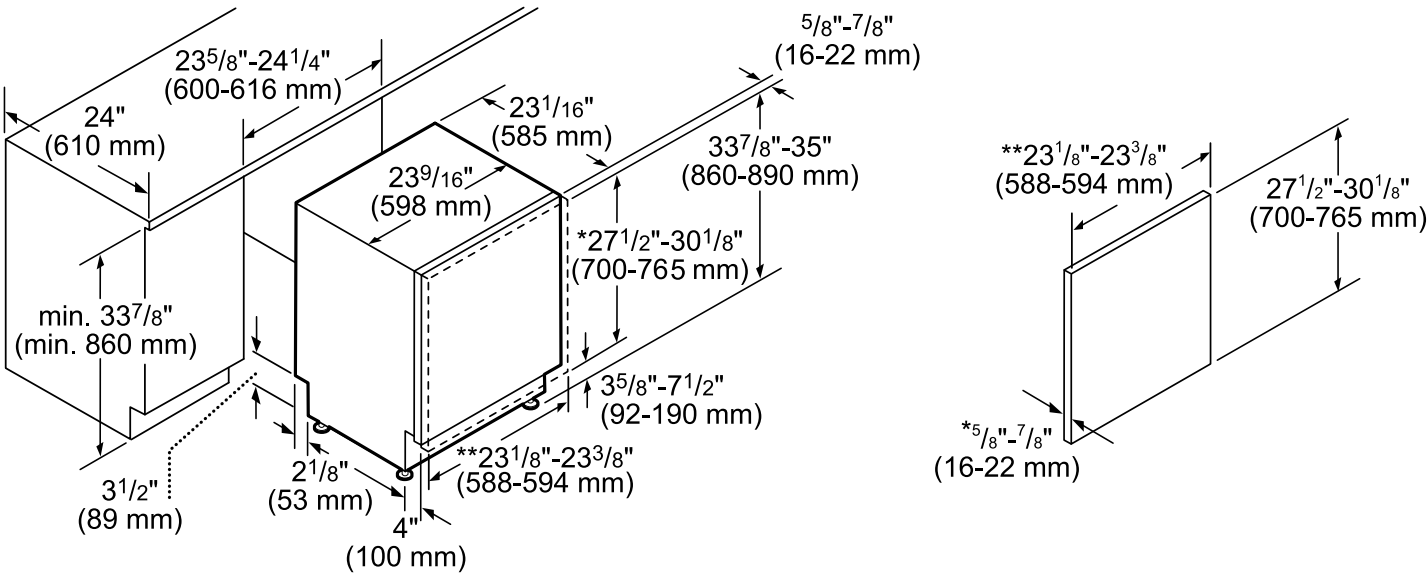

- * measured from the bottom edge of the countertop panel thickness recommended 3/4" (20 mm) panel weight 11–18 lb. (5–8 kg)
- ** 24" (610 mm) wide panel may be used depending on cabinet design

measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

MD24BS

24-INCH MICRODRAWER® MICROWAVE

MASTERPIECE® & PROFESSIONAL COLLECTION



FEATURES & BENEFITS

- Easy touch to automatic “open” and “close” enables hands-free operations
- Concealed drop-down panel effortlessly opens to a convenient 60° angle for easy readability and operation
- Spacious and easy to clean enameled cavity with 1.2 cu. ft. interior fits a 20 oz. cup or a 13" x 9" pan
- Achieve a perfectly flush installation in any standard depth cabinetry
- Sensor Cooking is designed to effortlessly manage humidity levels, automatically adjusting cooking time and intensity for optimal results every time
- 10 versatile Microwave Programs, including melt, warm, and soften to accomplish culinary tasks of all sizes with ease

GENERAL PROPERTIES	
Cavity Color	White
Microwave Power	950 W
CAPACITY	
Cavity Capacity	1.2 cu. ft.
TECHNICAL DETAILS	
Watts	1,500 W
Circuit Breaker	15 A
Volts	120 V
Frequency	60 Hz
Plug Type	120V-3 Prong
Power Cord Length	48"
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD)	16 5/16" x 23 7/8" x 23 3/8"
Required Cutout Size (HxWxD) – Standard Install	15 9/16" x 22 1/8" x 23 1/2"
Required Cutout Size (HxWxD) – Flush Install	16 5/8" x 24 3/16" x 23 1/2"
Net Weight	74 lbs.
WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year



†To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.

MD24BS
24-INCH MICRODRAWER® MICROWAVE
MASTERPIECE® & PROFESSIONAL COLLECTION



PRODUCT DIMENSIONS

Measurements in inches (mm)

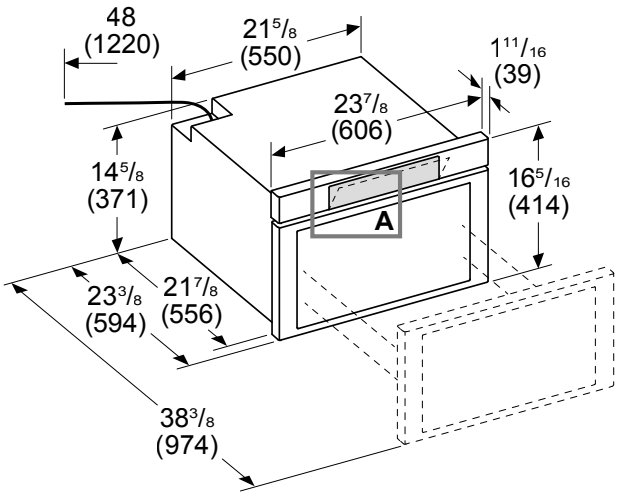



MD24BS

24-INCH MICRODRAWER® MICROWAVE

MASTERPIECE® & PROFESSIONAL COLLECTION



STANDARD INSTALLATION

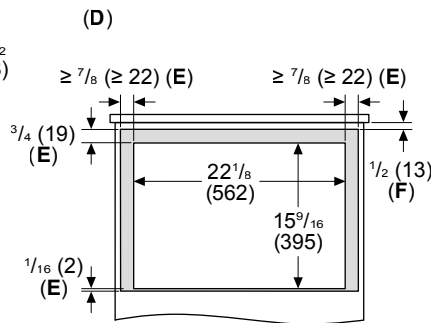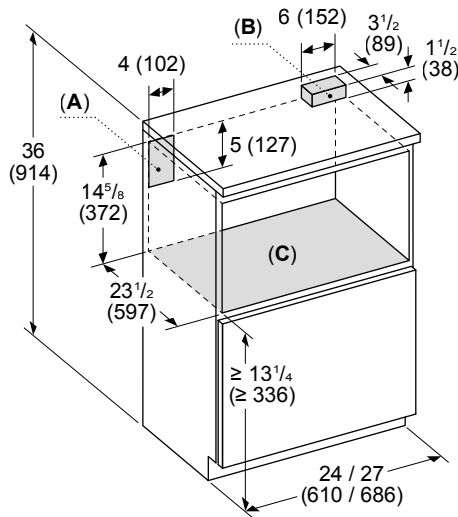

A: Recommended location of electrical outlet

B: Anti-tip block

C: Base should support up to 100 lb

D: Front view of cut-out



E: Overlap

F: Visible area

If under a counter, minimum clearance to counter top should be $\frac{7}{16}$ " (11 mm)

Measurements in inches (mm)

FLUSH INSTALLATION

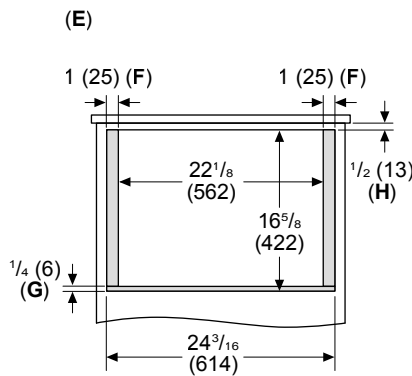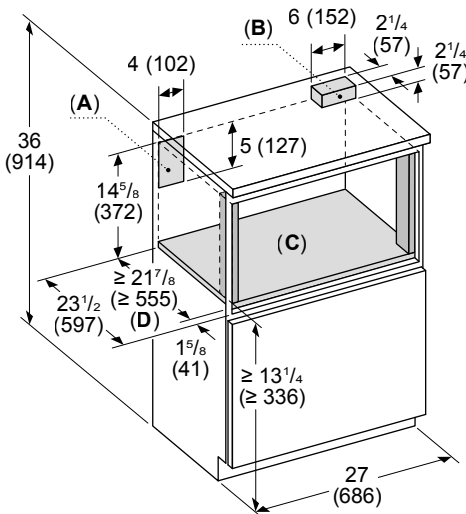

A: Recommended location of electrical outlet

B: Anti-tip block

C: Base should support up to 100 lb

D: Base depth

E: Front view of cut-out

F: Sides should be finished and extend back to cleat

Cleats should also be finished, as they may be visible after installation

G: Base thickness

H: Visible area

If under a counter, minimum clearance to counter top should be $\frac{7}{16}$ " (11 mm)

Measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

WD30W

30-INCH WARMING DRAWER

CUSTOM PANEL READY



FEATURES & BENEFITS

- Our warming drawer is the perfect combination of uncompromising performance, unique convenience features and elegant design
- ★ - SoftClose® feature prevents slamming and ensures ultra smooth closing of the warming drawer. These rails feature a telescoping ball-bearing design for smooth opening and closing that supports up to a 40 lbs. load.
- Warming mode with three convenient temperature settings
- Drawer installs vertically under Thermador speed, steam or wall oven

GENERAL PROPERTIES	
Power Levels	Low, Med, High, Proof
Dough Proofing Mode	Yes
Temperature Settings	100° – 190° F
Timer	5 min. – 5 hours
Automatic Shut Off	After 1 hour
Hinges	SoftClose®
Control Type	Illuminated Touch Control

CAPACITY	
Cavity Capacity	2.2 cu. ft.

TECHNICAL DETAILS	
Watts	450 W
Circuit Breaker	15 A
Volts	120 V
Frequency	60 Hz
Power Cord Length	84"
Plug Type	120V 3 Prong

DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD)*	9 7/16" x 29 3/4" x 24 1/2" (with 3/4" Panel)
Required Cutout Size (HxWxD) – Standard	9 1/4" x 28 1/2" x 23 1/2"
Required Cutout Size (HxWxD) – Flush*	9 9/16" x 30" x 24 1/2"
Net Weight	55 lbs

WARRANTY	
Limited Warranty Parts and Labor	2 Year

*For WD30W, the installed dimensions may differ. This is based on 3/4" (19 mm) thick custom panel. Customer to provide custom panel and drawer handle.


WD30W

30-INCH WARMING DRAWER

CUSTOM PANEL READY



30-INCH WARMING DRAWER AND CUTOUT DIMENSIONS

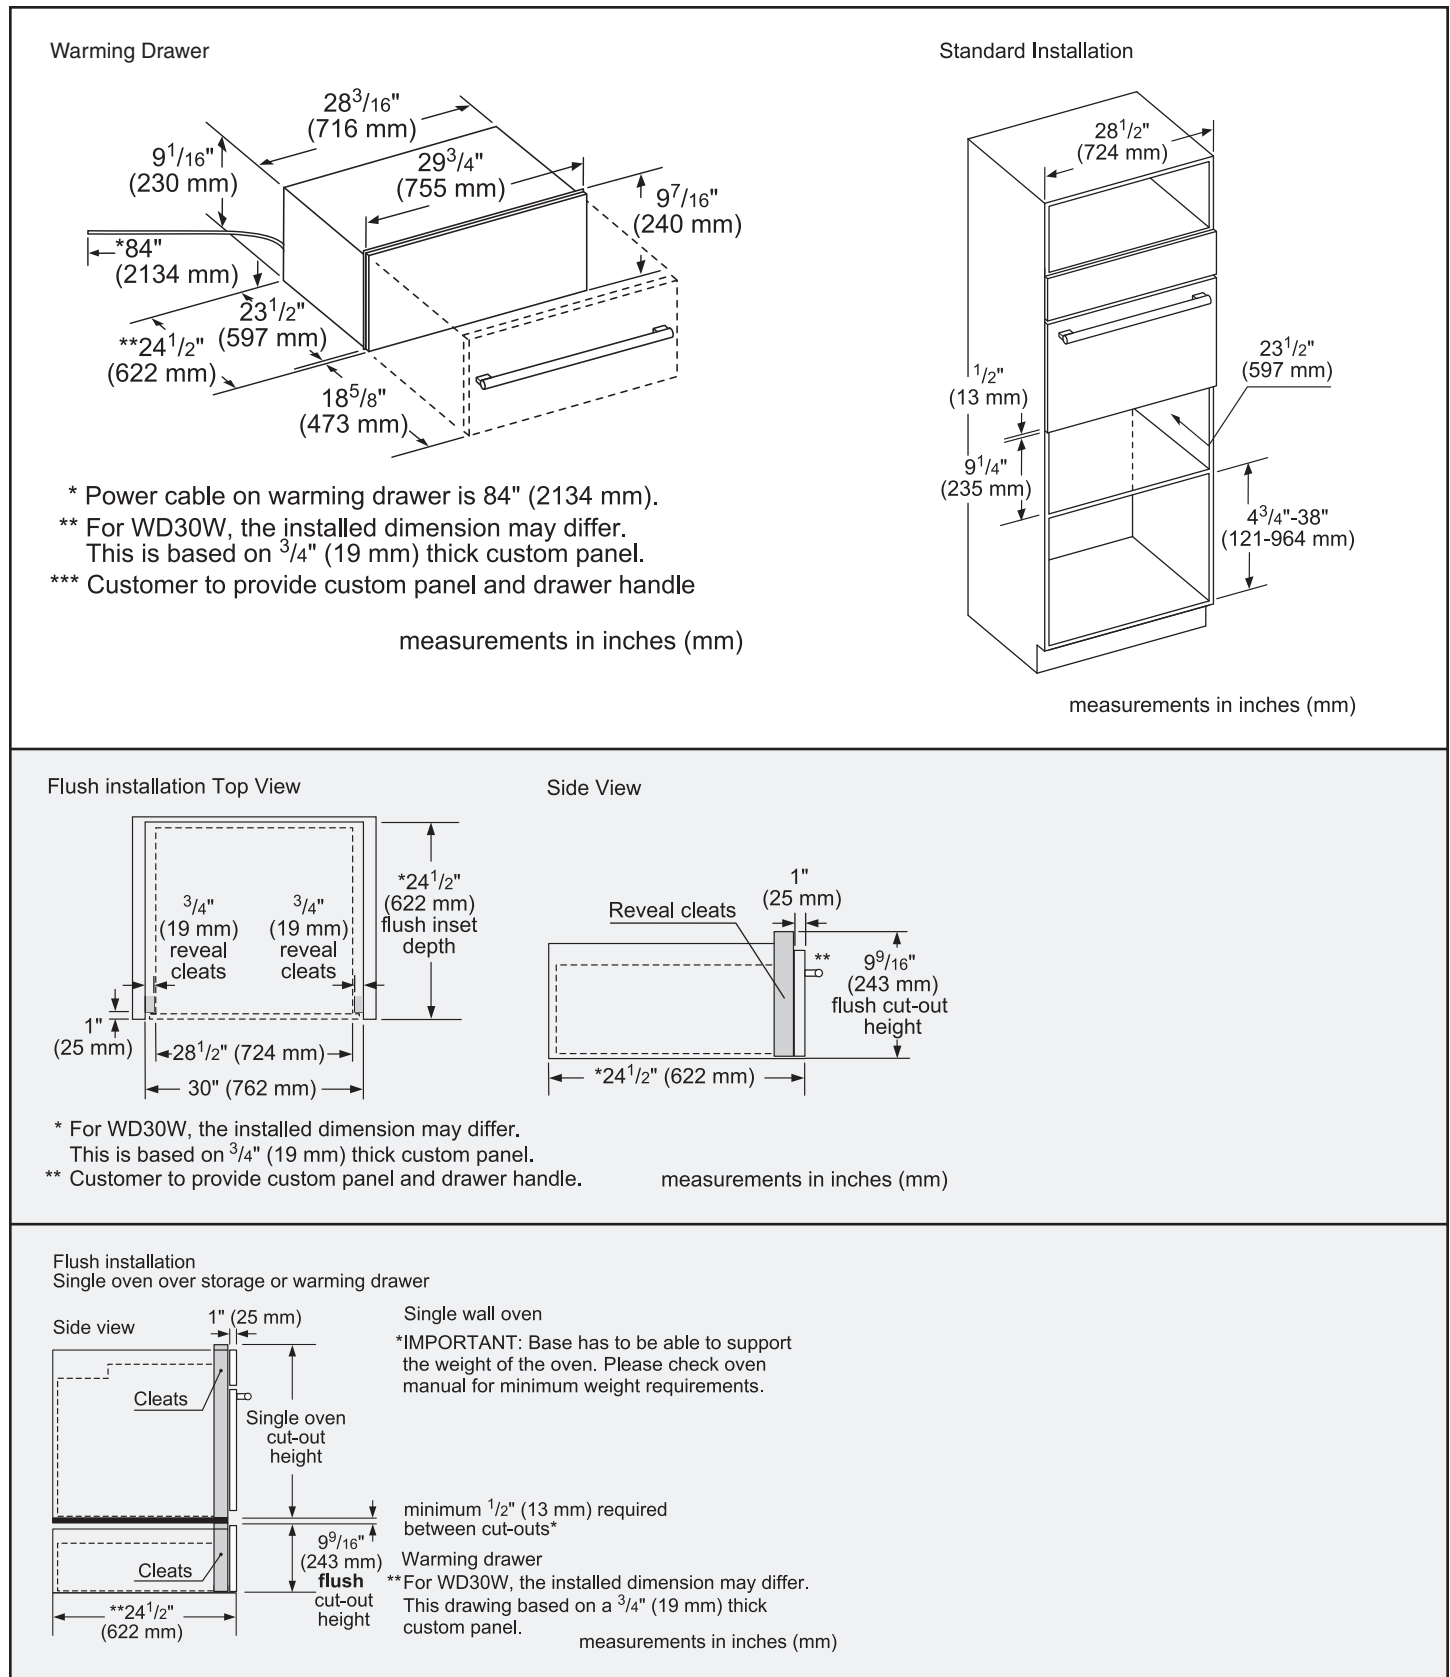

WD30W


30-INCH WARMING DRAWER

CUSTOM PANEL READY



INSTALLATION DETAILS

Standard installation
Single oven, double oven or combo oven over warming or storage drawer

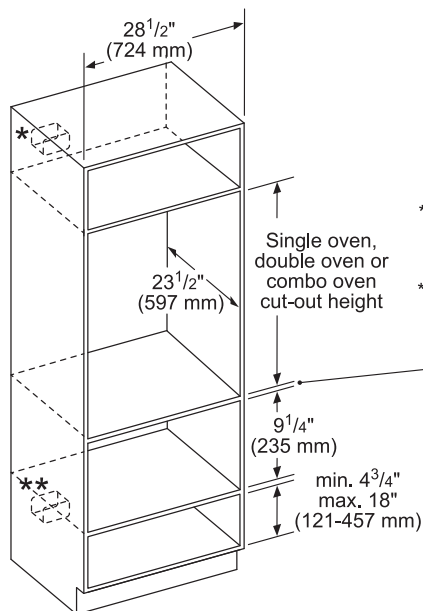


* Wall oven junction box may be located above or to the right or left of the unit within reach or the power cable.

**Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.

Minimum $\frac{3}{4}$ " (18 mm) required between cut-outs.

measurements in inches (mm)

Flush installation
Double or combo oven over storage or warming drawer

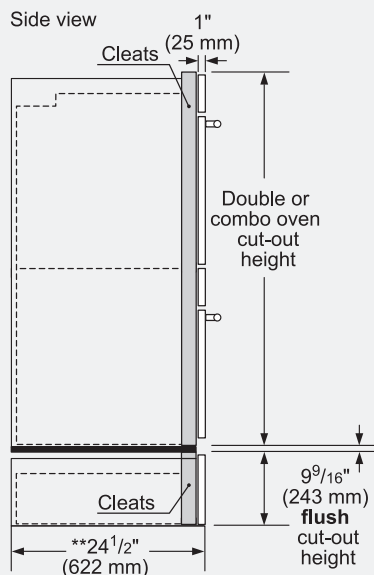

*IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.

minimum $\frac{1}{2}$ " (13 mm) required between cut-out*
Warming drawer

**For WD30W, the installed dimension may differ. This is based on $\frac{3}{4}$ " (19 mm) thick custom panel.

measurements in inches (mm)


WD30W

30-INCH WARMING DRAWER

CUSTOM PANEL READY



INSTALLATION DETAILS

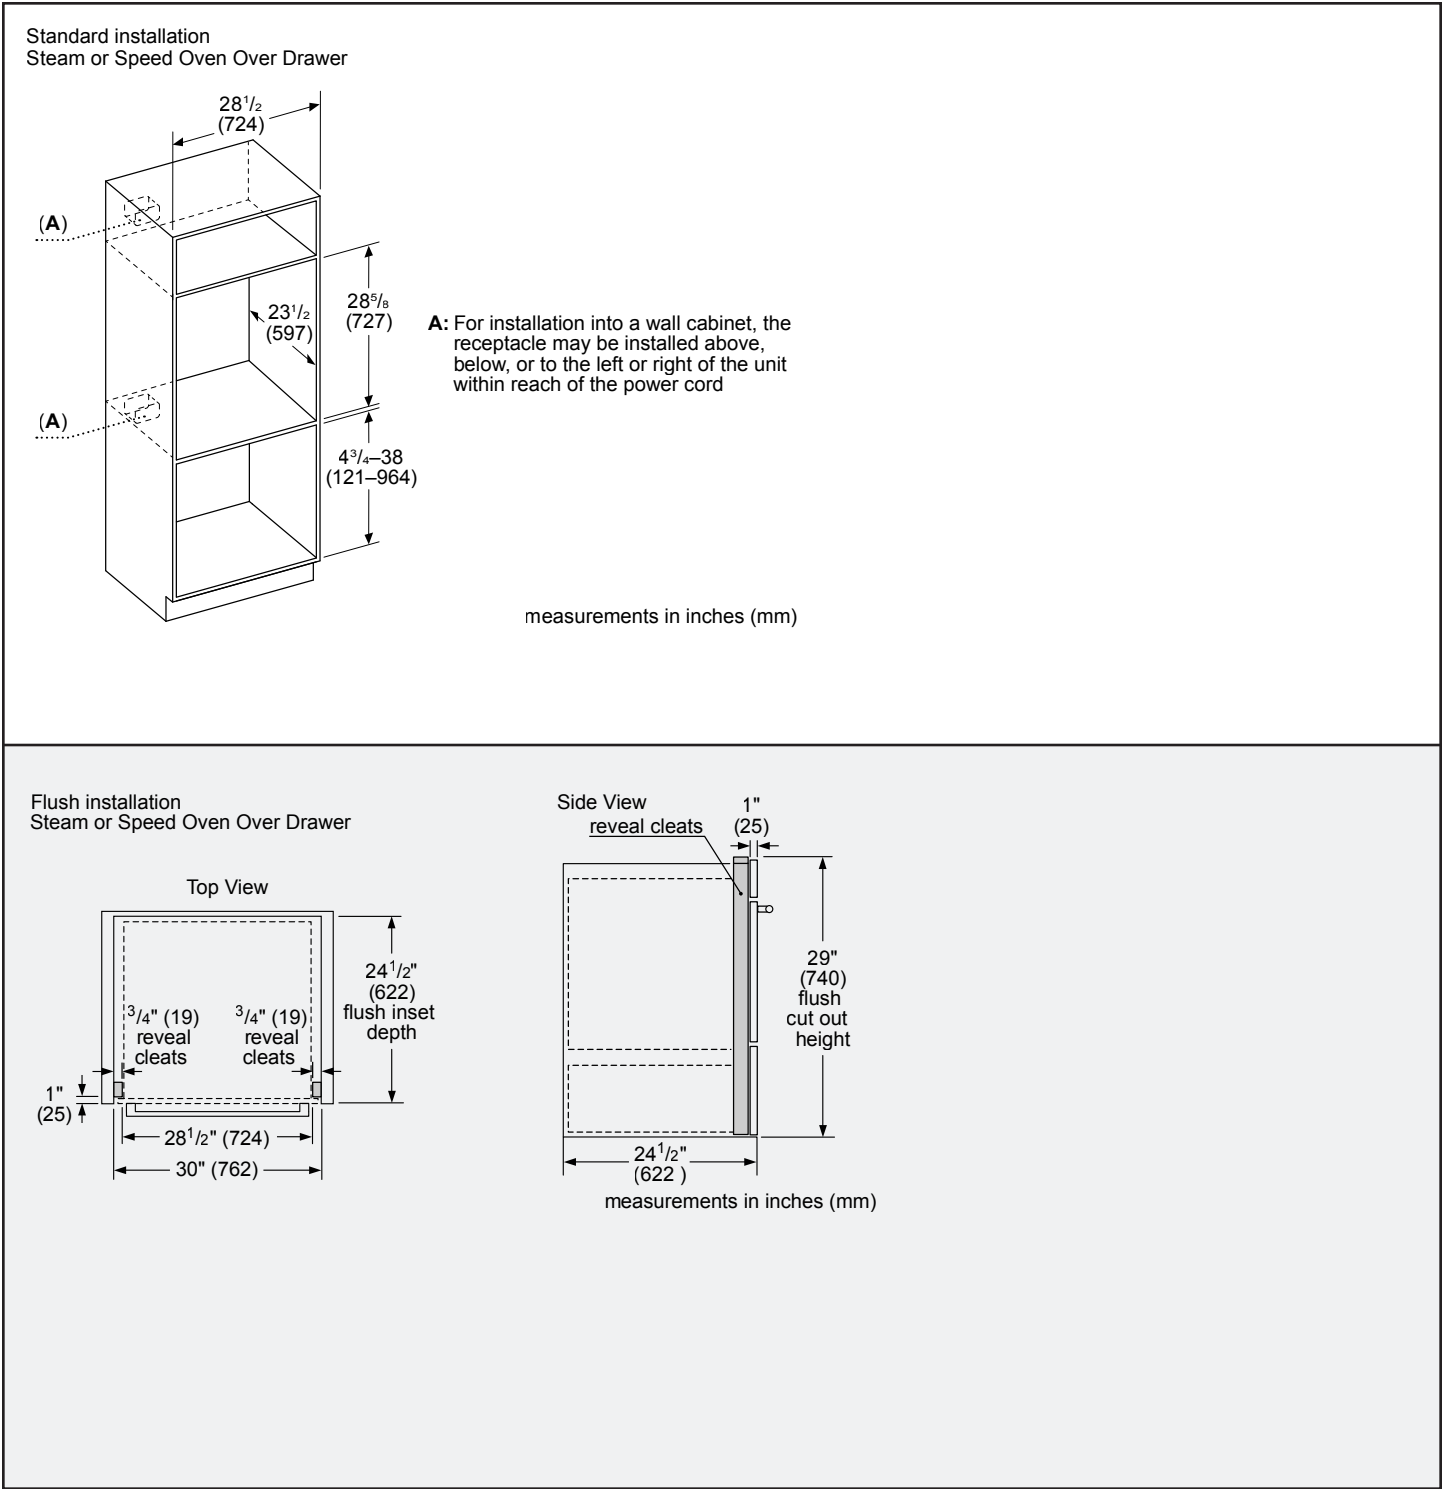

PRO Range Hood Insert, Stainless Steel Finish

Features

- Stainless steel finish
 - Fully retractable control knobs with white backlight
 - White LED lighting
 - Dishwasher-safe stainless steel baffle filters
 - 4 Fan speeds with a max of 600 CFM (ARHI28AA & ARHI34PAA)
 - 4 Fan speeds with a max of 1200 CFM (ARHI40PAA & ARHI46PAA)
- **Additional Features**
- CFMBK600A *CFM Reduction Kit
**Limits model to first two fan speeds to meet building codes.*
 - CFMBK1200A CFM Reduction Kit
**Limits model to only the first fan speed.*



Warranty

- 3-year parts, 1-year labor

Model Details


Model	ARHI28PAA	ARHI34PAA	ARHI40PAA	ARHI46PAA
Width	28"	34"	40"	46"
Dimensions	28-1/2" W x 22" D x 11-7/8" H	34-1/2" W x 22" D x 11-7/8" H	40-1/2" W x 22" D x 11-7/8" H	46-1/2" W x 22" D x 11-7/8" H
Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Fan Speeds (CFM)	90; 330; 490; 600	90; 330; 490; 600	380; 660; 950; 1200	380; 660; 950; 1200
Duct Size	10"	10"	10"	10"
Sones (High Speed)	10	10	13	13
Sones (Working Speed)	2.0	2.0	2.0	2.0
Grease Filter	Stainless Steel Baffle (2)	Stainless Steel Baffle (2)	Stainless Steel Baffle (2)	Stainless Steel Baffle (3)
Controls	Retractable Rotating Knobs w/ White Backlight	Retractable Rotating Knobs w/ White Backlight	Retractable Rotating Knobs w/ White Backlight	Retractable Rotating Knobs w/ White Backlight
Lighting	2 White LEDs (540 Lumen)	2 White LEDs (540 Lumen)	4 White LEDs (540 Lumen)	4 White LEDs (540 Lumen)



Accessories

Accessory Model Number	Accessory Description
KIT0192765	Recirculation Filters (Contains 4 round carbon filters)
KIT0192763	Recirculation Deflector (8" or 6" round)
KIT0185271	Transition Reducer (Reduce from 10" down to 8")
KIT0154387	Inline Blower Kit (1200 CFM)
KIT0153054	External Blower Kit (1200 CFM)
KIT0179549	Inline Blower Shell Kit (For use with 1200 CFM models only)
KIT0179547	External Blower Shell Kit (For use with 1200 CFM models only)

*Compatible 3rd party accessories. Please visit [Build.com](https://www.build.com) to order.

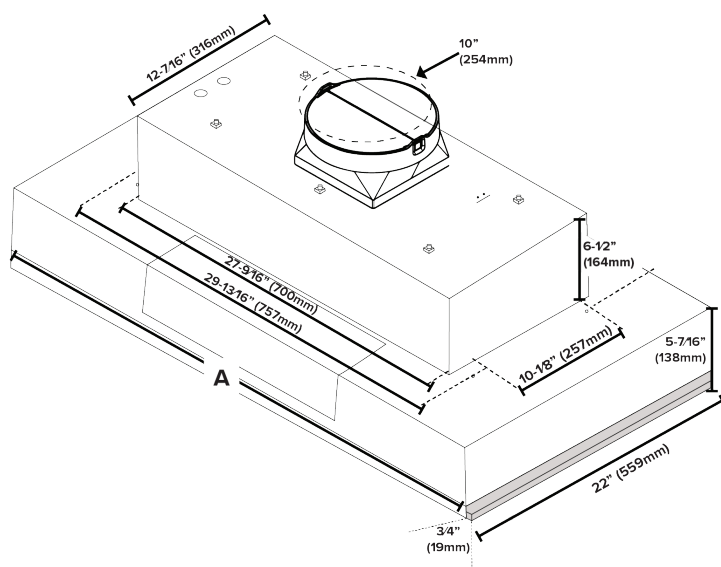

CL4850UFD/O



FEATURES

Split Climate® intelligent cooling system revolutionizes Sub-Zero's already-superior preservation capabilities, keeping food even fresher for longer

ClearSight® LED lighting system fully illuminates the interior and reduces shadows.

Sleek stainless accents trim the interior, matching the sophistication of the exterior

Touch control panel is conveniently located for easy access at the tap of a finger

Night Mode optimizes the interior lighting based on the detected ambient light, reducing the brightness by 90% in dim environments

Lift the base of the flip-up dairy compartment to store taller items on the shelf below

Activate Max Ice Mode to temporarily increase ice production

Wi-Fi enabled for convenient remote access using your mobile device or smart home system

Position adjustable door bins at various heights to accommodate assorted items

Sub-Zero offers an industry-leading full two-year warranty on appliances, along with a full five-year sealed system warranty

ACCESSORIES

48" Stainless Steel Kickplate

90° Door Stop

Air Purification Cartridge

Custom Front Panel Mounting Kit

Custom Side Panel Mounting Kit

Egg Container

Grille Frame - 84"

Pro Handle

Pro Louvered Flush Inset Grille - 84"

Stainless Steel Flush Inset Door Panel with Pro Handle

Stainless Steel Flush Inset Door Panel with Tubular Handle

Stainless Steel Flush Inset Drawer Panel with Pro Handle

Stainless Steel Flush Inset Drawer Panel with Tubular Handle

Stainless Steel Flush Inset Grille Panel

Stainless Steel Pro Louvered Grille - 84"

Stainless Steel Pro Louvered Grille - 84"

Stainless Steel Side Panel

Tubular Handle

Water Filter

Stainless Steel Flush Inset Door and Drawer Panels with Pro Handle



HANDLE ACCESSORIES

PRO



TUBULAR



PRODUCT DETAILS

REFRIGERATOR

- 7 glass refrigerator shelves (6 adjustable; 1 stationary)
- 4 crisper drawers with removable dividers
- 7 refrigerator door bins (5 adjustable; 2 stationary)
- 1 flip-up dairy compartment
- Air purification system
- LED refrigerator and freezer lights

FREEZER

- Full-extension drawer
- Water filtration system
- Automatic ice maker with removable ice container

Stainless Steel Flush Inset Door and Drawer Panels with Tubular Handle

Classic Stainless Steel Pro Louvered Grilles

Stainless Steel Pro Handles

Stainless Steel Tubular Handles

Stainless Steel Kickplate


Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.

Specifications are subject to change without notice. This information was generated on March 30, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.


PRODUCT SPECIFICATIONS

Model	CL4850UFD/O
Dimensions	48"W x 84"H x 24"D
Refrigerator Capacity	21.4 cu. ft.
Freezer Capacity	7.5 cu. ft.
Weight	702 lbs
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35–120 psi
Receptacle	3-prong grounding-type

ELECTRICAL




PLUMBING



PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements, thickness requirements and offset details visit subzero-wolf.com/builtinconfigurator.


NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

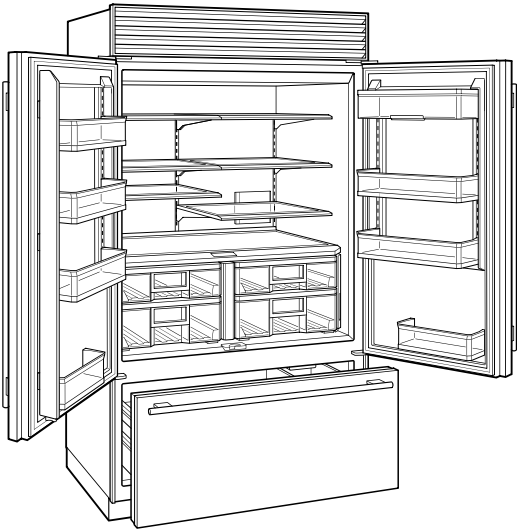


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

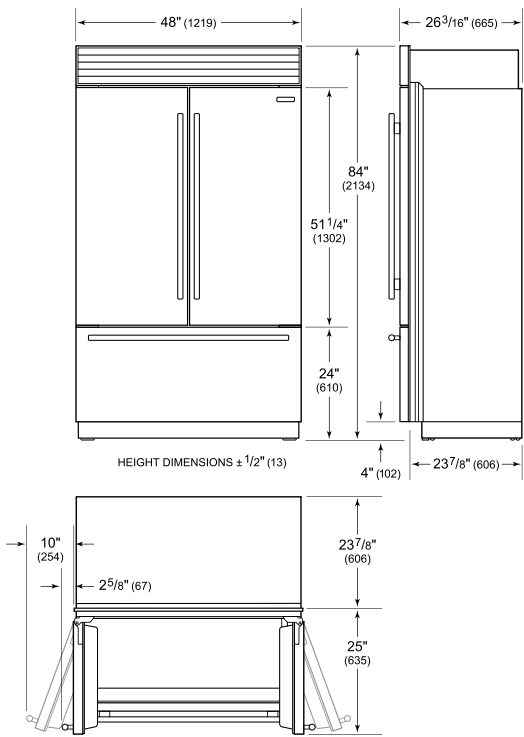

FLUSH INSET INSTALLATION

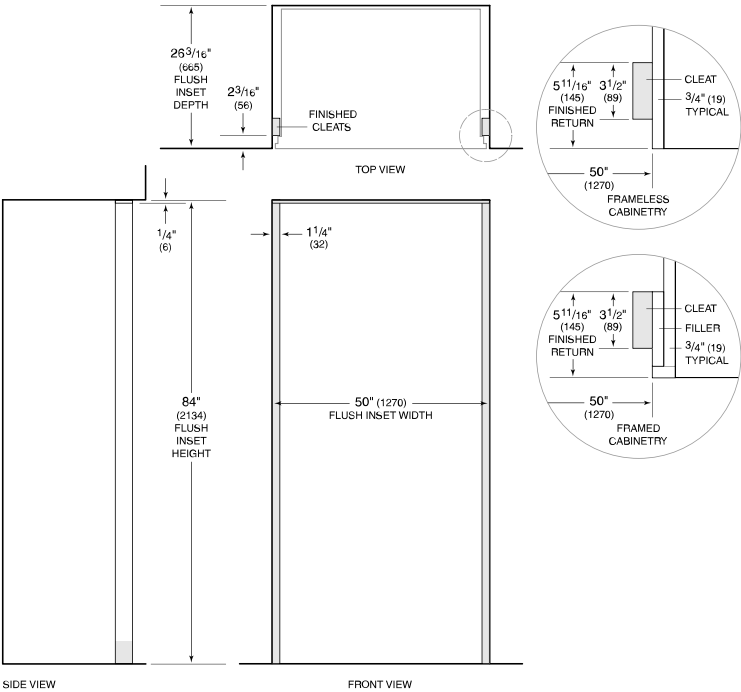

NOTE: 3/16" (89) finished returns and shaded areas will be visible and should be finished to match cabinetry. Shaded line represents profile of unit with 3/4" (19) panel.

SERVERY



Avallon AWBC242GGFDPRG

24 Inch Wide 21 Bottle Capacity and 64 Can Capacity
Beverage Center with LED Lighting and Double Pane Glass

Finish: Panel Ready

Qty: 1

Specification Sheet

Model: AWBC242GGFD

WINE AND BEVERAGE REFRIGERATOR



24-Inch Dual Zone Undercounter Wine and Beverage Refrigerator, Stainless Steel Door

Features

- 21 bottle and 64 can capacity built-in low temp French door beverage and wine refrigerator
- White, blue and amber interior LED lighting options
- Seamless, stainless steel trimmed glass door
- UV resistant glass door with low-e, double-panes, and argon gas between the two panes
- Touch panel with digital controls
- Clear tempered glass beverage shelves and wooden wine shelves with stainless steel trim
- Added security with a door lock
- Sabbath mode

Warranty

- One (1) year parts and labor
- Five (5) years compressor (part only)




Model Details

Model	Voltage	Door Swing	Finish
AWBC242GGFD	115V	French Door	Stainless Steel


Accessories

Model	Description	Finish
PCWRFILTER	Replacement Carbon Filter	Gray


Exterior Dimensions

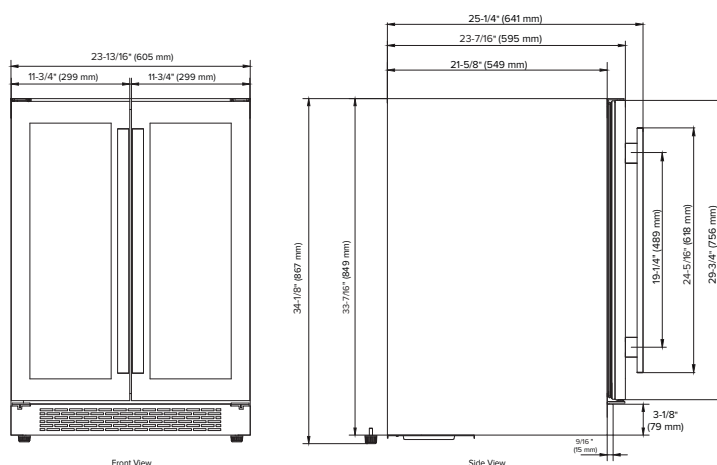

Interior Dimensions

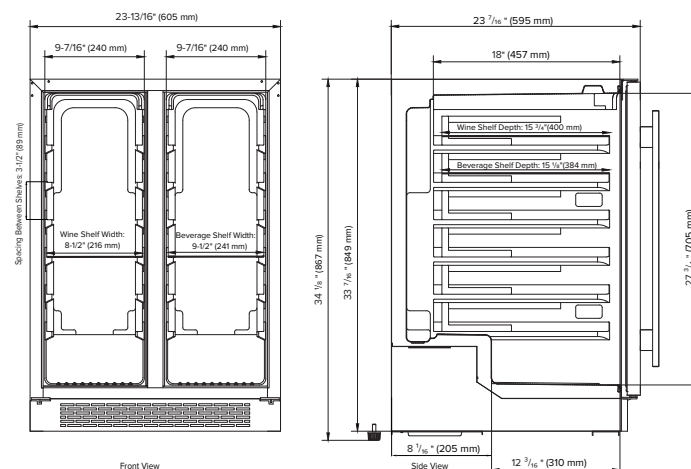


Door Swing

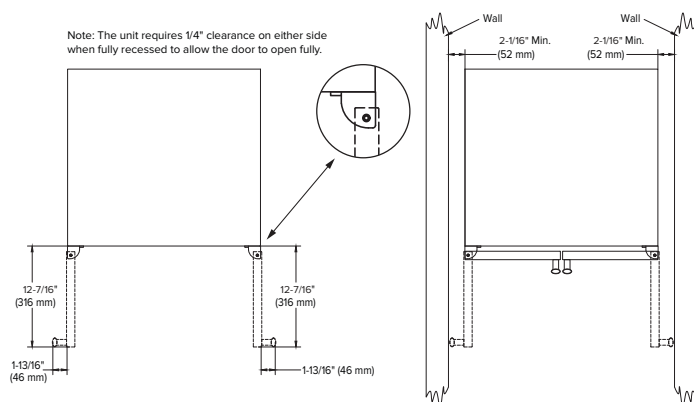

Specifications

Model#	AWBC242GGFD
Wine Bottle Capacity (750 ml)	21
Can Capacity (12 oz.)	61
Product Depth	23-7/16"
Product Depth with Handle	25-1/4"
Product Height	34-1/8"
Product Width	23-13/16"
Product Weight	132 lbs.
Refrigerant Type	R600a
Wine Zone Temperature Range	40°F - 65°F
Beverage Zone Temperature Range	34°F - 65°F
Power Cord Length	6'
Amps	1.5
Electric Supply	115 VAC, 60 Hz

Cutout dimensions

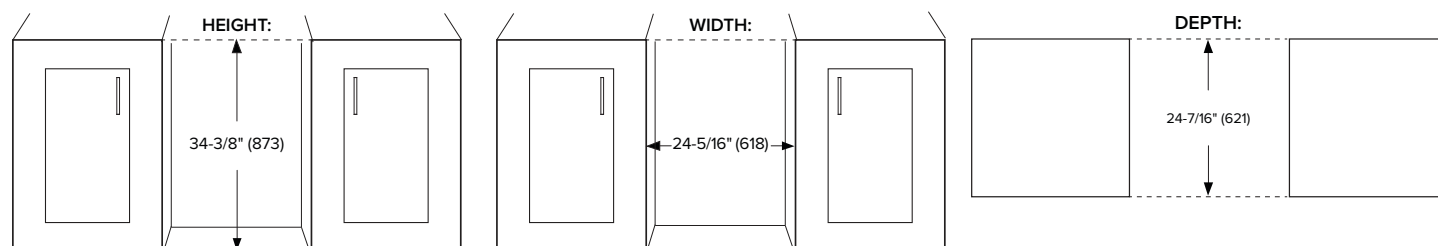

Note: Dimensions in parentheses are in millimeters. Specifications are subject to change without notice. Visit Avallon.com for the latest information.

LAUNDRY



LG LF30S8210S

36 Inch Wide 29.6 Cu. Ft. Energy Star Certified Fingerprint Resistant French Door Refrigerator with Full-Convert Drawer and Internal Water Dispenser

Finish: PrintProof Stainless Steel

Qty: 1



LG WM5800HVA

5.0 cu. ft. Mega Capacity Smart Front Load Washer

Finish: graphite steel

Qty: 1



LG DLEX5800V

7.4 cu. ft. Ultra Large Capacity Smart Front Load Electric Dryer

Finish: graphite steel

Qty: 1

LG REFRIGERATION

LF30S8210S

30 cu. ft. 4Door French Door Refrigerator

- Full-Convert Drawer™
- Internal Water Dispenser
- Slam-Resistant Door
- Flat Door with Pocket Handle Design
- Cool Guard

AVAILABLE COLORS

PRINTPROOF™ STAINLESS STEEL



ThinQ Care

Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

CAPACITY		REFRIGERATOR		DIMENSIONS/CLEARANCES/WEIGHTS	
Refrigerator (cu. ft.)	18 cu. ft.	No. of Shelves	4 split (4 Fixed)	Product (W x H x D)	35 3/4" x 70 3/8" x 34 3/8"
Full Convert Drawer (cu. ft.)	3.2 cu. ft.	Shelf Construction	Spill protector/Tempered glass	Width	35 3/4"
Freezer (cu. ft.)	8.4 cu. ft.	Shelf Trim	White décor	Height (to Top of Hinge)	70 3/8"
Total Capacity (cu. ft.)	29.6 cu. ft.	No. of Crisper Bins	2	Width	40 1/2"
ENERGY		Cool Guard	Yes	(Door Open 90° without Handle)	
ENERGY STAR® Qualified	Energy Star	Light	Yes	Width	56 3/4"
Energy Consumption (kWh/Year)	709	REFRIGERATOR DOOR		(Door Fully Open without Handle)	
WATER & ICE SYSTEM		No. of Door Bins (left door)	3	Height (to Top of Case)	69"
Dispenser	Internal Water Only	No. of Door Bins (right door)	3	Depth without Door	30"
No. Freezer Ice maker	1	Door shape	Flat	Depth without Handles	34 3/8"
Freezer Ice maker Ice type	Cubed	Handle Type	Pocket	Depth (to Hinge Cover)	30"
Freezer Ice maker	2.5 / 2.7 (IcePlus) lbs	Slam-Resistant Door	Yes	Depth (Total with Door Open)	48 1/2"
Daily production (lbs)		FULL-CONVERT DRAWER		Depth	
Freezer Ice maker storage capacity	3.8 lbs	Divider	Yes	(Draw Open Fully without Handle)	55 3/8"
Ice Plus	Yes	Temperature Range (°F)	41 / 37 / 33 / 29 / Freezer	Installation Clearance	Sides 1/8", Top 1", Back 2"
Filteration system	1 stage	Handle Type	Pocket Handle	Carton Dimensions (WxHxD)	38" x 73" x 35"
Filter	LT1000P	Light	LED lighting	Weight (Unit/Carton)	291 lbs. / 313 lbs.
COOLING		FREEZER		LIMITED WARRANTY	
Compressor Type	Smart Inverter	Door Type	Pull Drawer	Parts & Labor	1 year
Evaporator	Yes (1)	Handle type	Smart Pull™ Handle (Pocket Handle)	Sealed System (Parts & Labor)	5 years
Multi Air Flow Cooling	Yes	Drawers / Shelves	2-Tier organization	Compressor (Parts & Labor)	5 years
Temperature Sensors	3	Freezer Light	LED lighting	Linear / Inverter Compressor (Parts only)	6-10 years
Refrigerant	Low GWP, Zero ODP and More Energy Efficient Refrigerant (R600a / 84g / 2.96oz)	Upper		UPC CODES	
CONVENIENCE		Lower	N/A	LF30S8210S	195174060803
Display Type	Smooth Touch Control / White LED	SMART TECHNOLOGY		(PrintProof™ Stainless Steel)	
Temperature Controls	Electronic/Digital	Smart Diagnosis	Yes		
Door Alarm	Yes	Wi-Fi Enabled	Yes		
Child Lock	Yes	ThinQ®	Yes		
Auto Closing Door Hinge	Yes	ThinQ® Care	Yes		
Sabbath Mode	Yes	MATERIALS AND FINISHES			
ADA Compliant	Yes	Hidden Hinges	Yes		
		Available Colors	STS		
		PrintProof™	Yes		
		Insulation	Low GWP and Zero ODP Blowing Agent		

5.0 cu. ft. Mega Capacity Smart Front Load Washer with TurboWash® 360° and AI DD® Built-In Intelligence

- 5.0 cu. ft. Mega Capacity
- Built-In Intelligence: AI Fabric Sensor / Smart Pairing™
- TurboWash® 360° Technology
- Allergiene® Cycle
- Pet Care Cycle

AVAILABLE COLORS

- GRAPHITE STEEL
- ALPINE WHITE



LG ThinQ®


- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle

works with the Google Assistant

WORKS WITH alexa

SUMMARY		APPERANCE		MATERIALS AND FINISHES	
Type	Front Load Washer	Control & Display	Electronic Control Panel with LCD Display	NeveRust® Stainless Steel Drum	Yes
Capacity	5.0 cu.ft	Touch Buttons	Yes	Cabinet	Painted Steel (One Unit)
Matching Electric Dryer	DLEX5800X	Dial-A-Cycle®	Yes	Control Panel	
Matching Gas Dryer	DLGX5801X	FABRIC CARE FEATURES		Top Plate	Painted Steel
Matching Heat Pump Dryer	N/A	AI DD®	Yes	Door/Rim	Glass/Chrome
Color	Graphite Steel (V) Alphine White (A)	TurboWash® 360 Technology	Yes	Door Cover	Tempered Glass Door
WASH PROGRAMS		Steam Technology	Yes	All Available Colors	Graphite Steel (V) Alpine White (A)
No. of Programs	29	Allergiene® Cycle	Yes	ENERGY	
Wash Programs	Normal, AI Wash, Bedding, Delicates, Towels, Quick Wash, Heavy Duty, Allergiene™ Perm. Press, Tub Clean, ColdWash™, Pet Care, Microplastics care, BrightWhites™, Sanitary, Rinse & Spin, Spin Only, Hand/Wool, Activewear, Swimwear, Kids Wear, Jeans, Dresses, Color Care, Sweat Stains, Small Load, Large Load, XL Load	Sanitary Cycle	Yes	ENERGY STAR® Most Efficient	Yes
		CONVENIENCE FEATURES		ENERGY STAR® Certified	Yes
		Vibration sensing (Cabinet Vibration sensor)	Yes	CEE Tier	Tier 3
		TrueBalance®	Yes	IMEF	3.1
		Anti-Vibration System	Yes	IWF	2.9
No. of Options	13	4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	POWER SOURCE	
		End of Cycle Signal	Yes	Ratings	UL Listed
		Load Sense	Yes	Electrical Requirements	120 V, 60 Hz, 10 A
		Control Lock	Yes	Type	Electric
		Auto Suds Removal	Yes	OPTIONS/ ACCESSORIES	
Options	TurboWash®, Steam, Fresh Care, Pre-wash, Remote Start, Delay, Wi-Fi, Extra Rinse, Control Lock, Drum Light, Soak, Signal, "More Cycles" Edit, Overnight Wash	Leveling Legs	4 Adjustable Legs	Pedestal	WDP6V, WDP6A
		Drumlight	Yes	Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
		SMART FEATURES (ThinQ® TECHNOLOGY)		LG Sidekick® Pedestal Washer	WD300CV, WD300CA
		Proactive Cutomer Care	Yes	LG Sidekick® Pedestal Washer (WxHxD)	27" x 14 1/8" x 30 3/4" (50 1/2 with drawer open)
		Smart Diagnosis (v3.0)	Yes	Stacking Kit	KSTK4
WASH DETAILS		Wi-Fi	Yes	LIMITED WARRANTY	
No. of Wash/Rinse Temps	5	NFC Tag on Technology	No	Parts & Labor	1 Year
Wash/ Rinse Temps	Extra Hot/ Hot/ Warm/ Cold/ Tap Cold	Energy Monitoring	Yes	Drum	3 Years
No. of Spin Speed	5	Tub Clean Coach	Yes	Direct Drive Motor	10 Years
Spin Speeds	Extra High/ High/ Medium/ Low/ No Spin	MOTOR		UPC CODES	
Max RPM	1300	Motor Type	Inverter Direct Drive Motor	WM5800HVA (Graphite Steel)	048231349796
Water Levels	Load Sensing	Axis	Horizontal	WM5800HAA (Alphine White)	195174122358
No. of Soil Levels	5				

DIMENSION / CLEARANCES

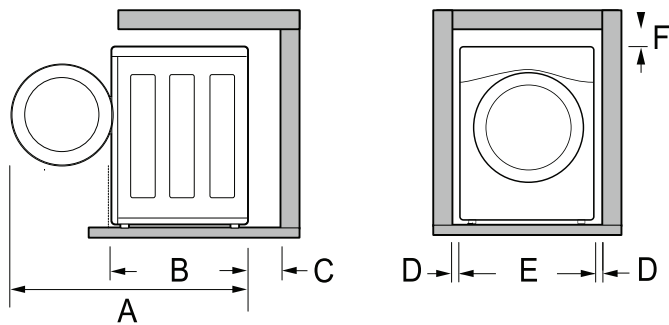


DIMENSIONS

Product (WxHxD)	27" x 39" x 33 1/8"
Depth with Door Open	57 3/4"
Carton Dimensions (WxHxD)	29 1/8" x 41 7/8" x 33 3/8"
Approx. Weight (Product / Carton)	203.9 lbs / 224.9 lbs
A	57 3/4" (146.6cm)
B	33 1/8" (84cm)
C	4" (10cm)
D	1" (2.5cm)
E	27" (70cm)
F	1/4" (0.5cm)

DIMENSION / CLEARANCES

To ensure sufficient clearance for water inlet hoses, drain hose and airflow, allow minimum clearances of at least 1" (2.5 cm) at the sides and 4" (10 cm) behind the appliance. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.

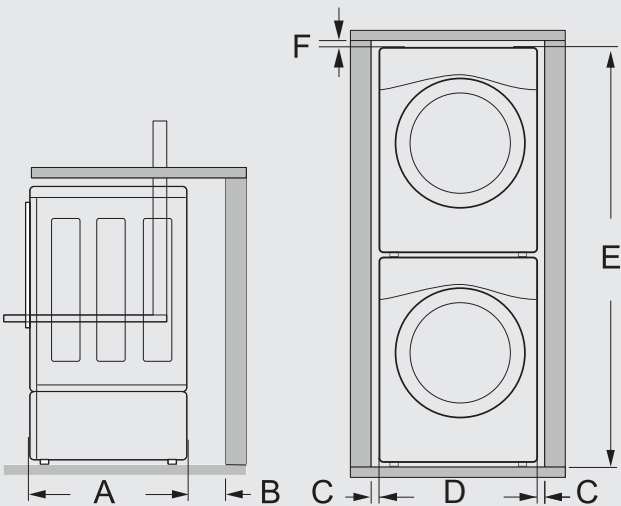

Stacking or Pedestal Installation

The washer can be stacked under a dryer or on top of a pedestal or pedestal washer.


- Refer to the instructions packaged with the optional pedestal kit before stacking appliance on pedestal.
- Do not use a drain pan with a pedestal or pedestal washer installation as it can block the drawer. Using a drain pan may result in increased vibration and noise during operation.

DIMENSIONS

A	33 1/8" (84cm)
B	4" (10cm)
C	1" (2.5cm)
D	27" (70cm)
E	77 1/2" (196.8cm)
F	1/4" (0.5cm)

CONNECTING THE WATER INLET HOSE

- Check the fittings and seals. Inspect the threaded fitting on each hose and make sure there is a rubber seal ❶ in place in both ends of each hose to prevent leaking.
- Connect the water inlet hoses to the hot and cold water faucets tightly by hand and then tighten another 2/3 turn with pliers.
- Connect the blue hose to the cold water faucet and the red hose to the hot water faucet.

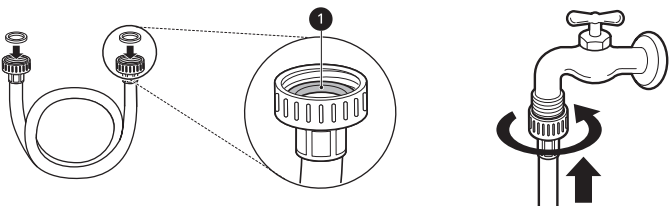


Flush out the inlet hoses.

- After the hoses are connected, turn on the water faucets and flush out any foreign substances such as dirt, sand, or sawdust. Foreign substances can damage washer inlets and lead to leakage.
- Let the water drain into a bucket, and check the water temperature to make sure you've connected the hoses to the correct faucets.

Attach the inlet hoses to the back of the washer.

- Attach the hot water inlet hose to the hot water inlet on the back of the washer. Attach the cold water inlet hose to the cold water inlet on the back of the washer.
- Tighten the fittings securely. Turn on both faucets all the way and check for leaks at both ends of the hoses.

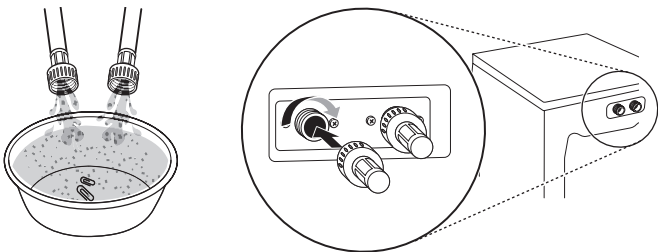

DLEX5800_ / DLGX5801_



7.4 cu. ft. Ultra Large Capacity Smart Front Load Dryer with AI Sensor Dry & TurboSteam®

- 7.4 cu. ft. Ultra Large Capacity
- Built-In Intelligence: AI Sensor Dry™ / Smart Pairing™
- SteamFresh™ Cycle with TurboSteam™ Technology
- Pet Care Cycle
- FlowSense® Duct Clogging & Lint Filter Indicators

AVAILABLE COLORS

- GRAPHITE STEEL
- ALPINE WHITE




Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



SUMMARY		APPEARANCE		MATERIALS	
Type	Front Load Dryer	Control & Display	Electronic Control Panel with LED Display	Aluminized Alloy Steel Drum	Yes
Vent Type	Vented	Dial-A-Cycle®	Yes	NeveRust® Stainless Steel Drum	No
Dryer Type	Elec: DLEX5800V / DLEX5800A Gas: DLGX5501A/ DLGX5501A	Touch Buttons	Yes	Cabinet	Painted Steel
Capacity	7.4 cu. ft.	FABRIC CARE FEATURES		Door	Tempered Glass Door
Matching Washer	WM5800HVA, WM5800HAA	AI Sensor Dry	Yes	All Available Colors	Graphite Steel (V) Alpine White (A)
Sensor Dry	Yes	Sensor Dry	Yes	POWER SOURCE	
Steam	Yes	Precise Temperature Control with Variable Heater	Yes	Ratings	CSA Listed
Available Color	Graphite Steel (V) Alpine White (A)	Steam	TurboSteam®	Electrical Requirements	Elec: 120/240V, 60Hz, 26A (120/208V, 60Hz, 23A) Gas: 120V, 60Hz, 11.5A
DRYER PROGRAMS		CONVENIENCE FEATURES		Type	Electric, Gas
No. of Programs	26	3 Minute Installation Check	Yes	Plug	Elec: Not Included Gas: Included
	Normal, AI Dry, Bedding, Delicates, Quick Dry, Timed Dry, Perm. Press, SteamFresh™, Heavy Duty, Towels, Air Dry, Pet Care, SteamSanitary™, Power Dry Low Temp Dry, Super Dry Activewear, Jeans, Blanket Refresh, Easy Ironing, Small Load, Large Load, XL Load, Wrinkle Prevention, Overnight Dry, Rack Dry	End of Cycle Signal	Yes	Plug Type	Elec: 4-Wire or 3-Wire (Home Built after 1996 require 4-wire) Gas: 3 Prong
No. of Options	11	Drum Light (Door Open)	Yes	OPTIONS	
	Energy Saver, Remote Start, Wrinkle Care, Steam, Low Static, Damp Signal Drum Light, Wi-Fi, Signal, "More Cycles" Edit, Smart Diagnosis, Smart Diagnosis,	Reversible Door	Yes	Side Venting Kit	383EEL9001B
Temperature Setting	High, Med High, Medium, Med Low, Low	FlowSense® Duct Clogging Indicator	Yes	Drying Rack	3750EL1001A
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	Wrinkle Care Option	Yes	Pedestal	WDP6V, WDP6A
Dry Mode	No	Control Lock	Yes	Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
Manual Dry Times	10min - 100min (5 min Incremental)	Venting Option	Elect: 4 Way Venting Gas: 3 Way Venting	LIMITED WARRANTY	
		4 Adjustable Legs	Yes	Parts & Labor	1 Year
		Remaining Time Display / Status Indicator(s)	Yes	Drum	3 Years
		SMART FEATURES (ThinQ® TECHNOLOGY)		UPC CODES	
		Smart Diagnosis (v3.0)	Yes	DLEX5800V	048231349802
		WiFi	Yes	DLEX5800A	195174126370
		NFC Tag On Technology	No	DLGX5801V	048231349819
		ThinQ Care	Yes	DLGX5801A	195174129708
		Remote Start/Cycle Monitor	Yes		
		Energy Monitoring	Yes		
		ENERGY			
		ENERGY STAR® Certified	Yes		
		CEF	3.94		

DIMENSION / CLEARANCES

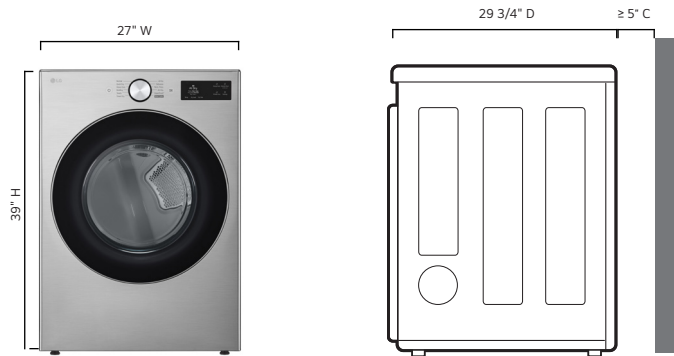

DIMENSIONS

Product (WxHxD)	27" x 39" x 29 3/4"
Depth with Door Open	51 3/8" D
Carton Dimensions (WxHxD)	29" x 43 1/4" x 31 1/8"
Product Weight (lbs.)	Electric: 120.5/ Gas: 125.1
Carton Weight (lbs.)	Electric: 127.1 / Gas: 133.1

DIMENSION / CLEARANCES


CLOSET VENTILATION REQUIREMENTS

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm²) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm²) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

DIMENSION / CLEARANCES

INSTALLATION SPACING FOR CABINET AND CLEARANCES WITH OPTIONAL PEDESTAL BASE

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

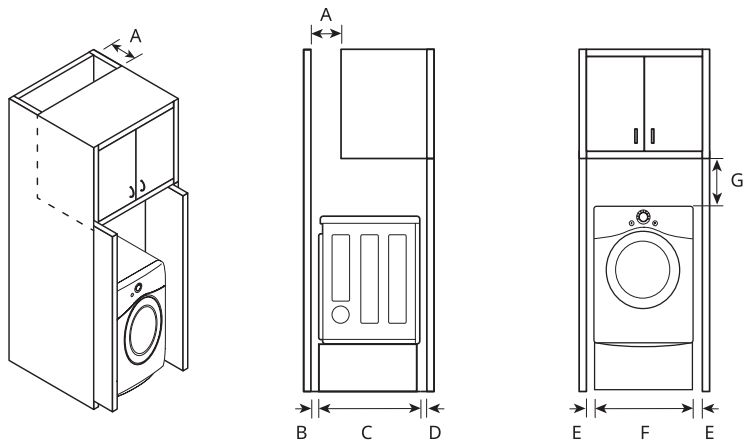

DIMENSIONS


A	Depth of Ventilation Opening	≥ 7" (178mm)
B	Back Clearance	≥ 5" (127mm)
C	Depth	29 3/4" (756mm)
D	Front Clearance	≥ 1" (25 mm)
E	Side Clearance	≥ 1" (25 mm)
F	Width	27" (686 mm)
G	Clearance to Top of Cabinet	≥ 9" (229 mm)

DIMENSION / CLEARANCES

Installation Spacing for Recessed Area or Closet Installation

These clearance are recommended for this dryer.

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

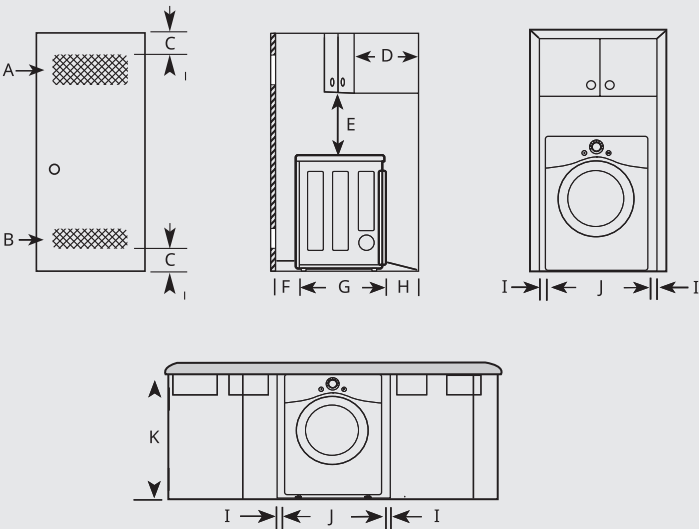

DIMENSIONS


A	Upper Ventilation Opening	≥ 48 sq. in. (310 cm ²)
B	Lower Ventilation Opening	≥ 24 sq. in. (155 cm ²)
C	Distance to Ventilation Opening	≥ 3" (76 mm)
D	Overhead Cabinet Depth	≤ 14" (356 mm)
E	Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F	Front Clearance	1" (25 mm)
G	Depth	29 3/4" (756 mm)
H	Back Clearance	≥ 5" (127 mm)
I	Side Clearance	≥ 1" (25 mm)
J	Width	27" (686 mm)
K	Height of Cabinet Opening	39" (989 mm)

LEVELING THE APPLIANCE

CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

- 1 Level
- 2 Level Feet

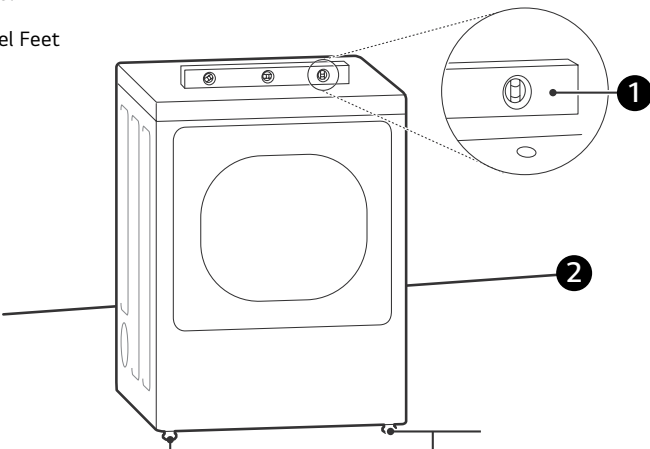

Primary Closet



LG WKE100HVA

27 Inch Wide Front Loading Laundry Center with 4.5 Cu. Ft. Washer and 7.4 Cu. Ft. Electric Dryer with Center Control

Finish: Graphite Steel

Qty: 1

LG LAUNDRY

WKE100H_A / WKG101H_A

Single Unit LG WashTower™ with Center Control™
 4.5 cu. ft. Front Load Washer and 7.4 cu. ft. Dryer

Ultra Large Capacity 4.5 cu.ft. Washer and 7.4 cu.ft. Dryer

Single Unit WashTower™ Design

Built-In Intelligence - AI Fabric Sensors/Smart Learner/Smart Pairing™

Allergiene™ Wash Cycle/ AAFA Certified LG Washer

ThinQ® Technology with Proactive Customer Care

Sensor Dry

Tempered Glass Doors

LG ThinQ®



Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



AVAILABLE COLORS



SUMMARY	Washer	Dryer
Type	Front Load Washer	Front Load Dryer
Capacity (cu.ft.)	4.5 cu. ft.	7.4 cu. ft.
Color	White (W), Graphite Steel (V)	
APPEARANCE	Washer	Dryer
Touch Buttons		Yes
Full Touch Electronic Control Panel with LED Display		Yes
Center Control™	Yes	
ENERGY	Washer	Dryer
ENERGY STAR® Qualified		Yes
CEE Tier	Tier2	-
IMEF	2.92	-
IWF	2.9	-
CEF	-	Electric: 3.94 Gas: 3.49
PROGRAMS	Washer	Dryer
No. of Programs	6	6
	Normal, Bedding, Delicates, Heavy Duty, Speed Wash, Downloaded	Normal, Bedding, Delicates, Heavy Duty, Small Load, Downloaded
OPTIONS	Washer	Dryer
No. of Options	9	7
	Delay wash, Steam, Extra Rinse, Pre-wash, Sanitary, Tub Clean, Control Lock, Signal, Wi-Fi / Remote Start	Wrinkle Care, More Time, Less Time, Energy Saver, Control Lock, Signal, Wi-Fi / Remote Start
DETAILS	Washer	Dryer
No. of Wash/Rinse Temps	5	-
Wash/Rinse Temps	Hot, Warm/Hot, Warm, Cold/Warm, Cold	-
No. of Spin Speeds	5	-
Spin Speeds	High, Medium/High, Medium, Low, No Spin	-
Max RPM	1300	-
Water Levels	Load Sensing	-
No. of Soil Levels	5	-
Temperature Settings	-	High, Medium/High, Medium, Low/Medium, Low
Drying Levels	-	Very, More, Normal, Less, Damp

Manual Dry Times	-	60 min., 50 min., 40 min., 30 min., 20 min.
FABRIC CARE FEATURES	Washer	Dryer
AI DD™	Yes	-
Steam Technology	Yes	-
Allergiene™ Cycle	Yes	-
Sanitary Cycle	Yes	-
AI Sensor Dry™	-	Yes
Sensor Dry	-	Yes
Precise Temperature Control with Variable Heater	-	Yes
CONVENIENCE FEATURES	Washer	Dryer
TrueBalance™ Anti-Vibration System	Yes	-
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	-
End of Cycle Signal	Yes	-
LoadSense	Yes	-
Control Lock	Yes	-
Auto Suds Removal	Yes	-
Leveling Legs	4 Adjustable Legs	-
Remaining Time Display/Status Indicator(s)	Yes	-
3 Minute Installation Check	-	Yes
End of Cycle Signal	-	Yes
Drum Light		Yes
FlowSense™ Duct Clogging Indicator	-	Yes
Wrinkle Care Option	-	Yes
Control Lock	-	Yes
Venting Option	-	Electric: 3 Way Venting / Gas: 2 Way Venting
4 Adjustable Legs	-	Yes
Remaining Time Display/Status Indicator(s)	-	Yes
ThinQ® TECHNOLOGY	Washer	Dryer
SmartDiagnosis™ (v3.0)		Yes
Wi-Fi		Yes
Remote Start and Cycle Monitor		Yes

Energy Monitoring		Yes
Tub Clean Coach	Yes	-
MOTOR	Washer	Dryer
Motor Type	Inverter Direct Drive Motor	-
Axis	Horizontal	-
MATERIALS AND FINISHES	Washer	Dryer
NeveRust™ Stainless Steel Drum	Yes	-
Aluminized Alloy Steel Drum	-	Yes
Control Panel	Plastic	
Top Plate	Steel	
Cabinet	Painted Steel	
Door / Rim	Large Circle Shiny Rose Gold Rim	
Door Cover	Tinted Round Tempered Glass	
All Available Colors	White (W), Graphite Steel (V)	
CERTIFICATION	Washer	Dryer
AAFA	Yes	-
POWER SOURCE	Washer	Dryer
Ratings	CSA Listed	-
Electrical Requirements	120V, 10 Amps	-
Type	Electric	-
Ratings	-	CSA Listed
Electrical Requirements	-	120V, 15 Amps (Gas) 240V 30 Amps (Electric)
Type	-	Gas / Electric
BTU Rating	-	Gas: 20,000
OPTIONS/ACCESSORIES	Washer	Dryer
LP Conversion Kit	-	383EEL3002D
Side Venting Kit	-	3911EZ9131X
DIMENSIONS	Washer	Dryer
Product (WxHxD)	27" x 74 3/8" x 30 3/8" (700mm x 1890mm x 770mm)	
Depth with Door Open	(55" D with door open)	
Carton (WxHxD)	30 1/16" x 79 11/32" x 32" (763 x 2015 x 813(mm))	
Weight (Product/Carton)	Electric (311 lbs / 346 lbs) Gas (311 lbs / 346 lbs)	
LIMITED WARRANTY	Washer	Dryer
Parts and Labor	1 Year	1 Year
Direct Drive Motor	10 Years	-
Drum	3 Years	3 Years
UPC CODES		
WKE100HVA (Graphite Steel)	048231029353	
WKG101HVA (Graphite Steel)	048231029377	
WKE100HWA (White)	048231029360	
WKG101HWA (White)	048231029384	