



PLUMBING FIXTURES SPEC BOOK

WOOD RESIDENCE
3/31/2026



The Galley Workstation Ideal Workstation 3S With Five Tool Culinary Kit - American Black Walnut



Davoli Pull Down Kitchen Faucet with Button Sprayer, High Arc Spout - Polished Nickel



Davoli Cold Water Dispenser - Polished Nickel



Davoli Air Activation Switch for Disposer, Trim Only - Polished Nickel



Air Activation Switch for Disposer, Control Box Only



ASPECT by Waterstone Stresa, Soap Dispenser



IPRO750 3/4HP Garbage Disposer



Disposal Flange With Stopper - Vibrant Brushed Nickel

Ideal Workstation. 3S

SPECIFICATIONS

THEGALLEY
REINVENT YOUR KITCHEN

IWS-3-S-WA



American Black Walnut

IWS-3-S-GT



Graphite Wood Composite

IWS-3-S-BA



Natural Golden Bamboo

IWS-3-S-GR




Exclusive Gray Resin*

IWS-3-S-WH



Designer White Resin*

Culinary Tools included (CKT-12)



† The Upper Deck requires a 1/4" clearance below the surface of the countertop. If the countertop thickness is 3/4" or less, Walnut or Bamboo Upper Deck sections will not have the clearance to function above the Upper Tier Culinary Tools.

Upper Deck.

Cover set **UD-3-2P-WA/GT/BA/GR/WH** Walnut, Graphite, Bamboo, Gray or White Resin



(1) 12"
Included in CKT

Sections Walnut, Graphite, Bamboo, Gray or White Resin



Specifications

Single bowl
Users: 1
Culinary Tools included: Five
Galley Tap recommended: One
Outside dimensions: 33 1/2" x 19 1/2" x 10 5/16"
Interior dimensions: 32" x 17" x 10"
Countertop cutout: 32 1/2" x 18"
Basin area: 32" x 16"
Minimum cabinet size: 36" or 90cm

Basin (KSO-3-S-SS)

16GA 316L stainless steel indoor/outdoor
SilentArmor™ sound reduction technology
Angel finish
Three tier design
Star™ groove pattern
Reversible side drain
Drain cover included
Limited Lifetime Warranty
Made in the USA
ASME A112.19.3/CSA B45.4 certified
cUPC™ certified

Customize Your Galley

Add 7-12" length
Add 1-6" length
Add 18" DryDock
Add 12" DryDock
Apron front

9" depth
Center drain
ThinTop™
WorkTop™
*Color coded labels available


Recommended Basin Accessories & citrine.

Bottom Grate set **BG-3-S-1-SS** Stainless Steel




31 1/2"

CIT-09-SS-C



CIT-09-WD-C



Strainer M-DRN-MSS
Angel Finish 304 Stainless Steel



Disposal Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel



Auto Strainer Angel Finish 304 Stainless Steel with Polished or Matte knob



A-DRN-PSS
A-DRN-MSS
A-DRN-MSS shown


CIT-04-WD-B



Ideal Workstation. 3S

SPECIFICATIONS | Right Hand Drain Orientation

Tap Hole Specifications

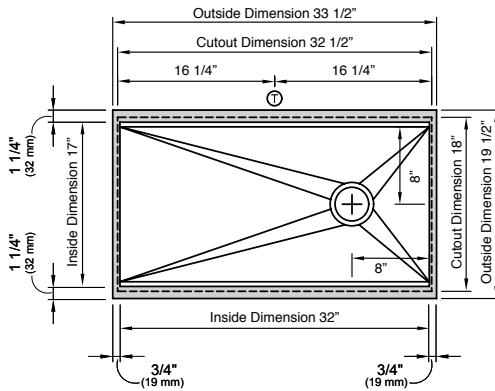

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"


① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

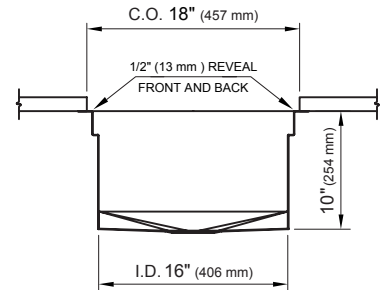

Countertop Cutout Plan

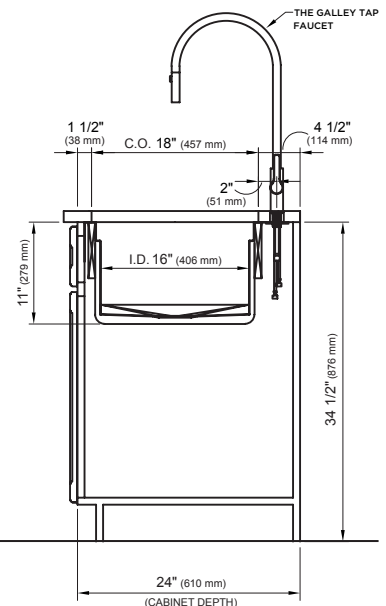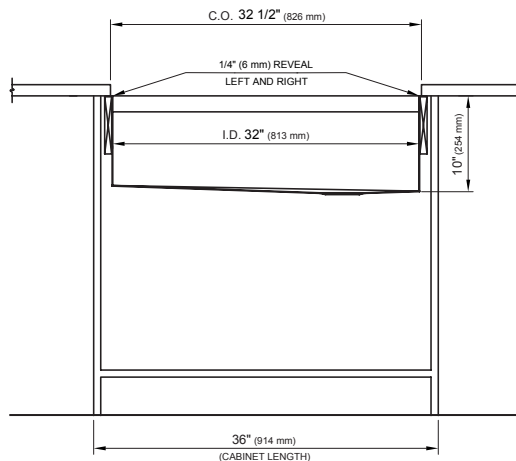

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library



Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255

Ideal Workstation. 3S

SPECIFICATIONS | Left Hand Drain Orientation

THEGALLEY
REINVENT YOUR KITCHEN

Tap Hole Specifications

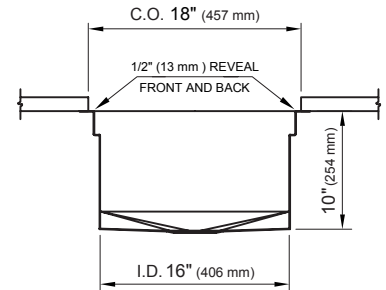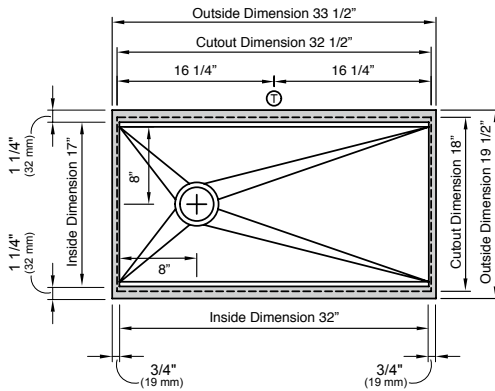

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter



Center Tap hole diameters 2" behind cutout

Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customer@thegalley.com
for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

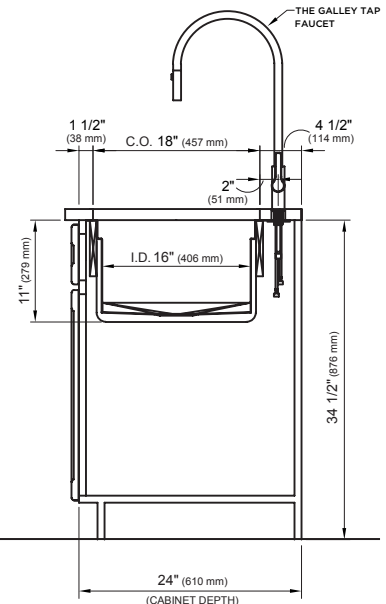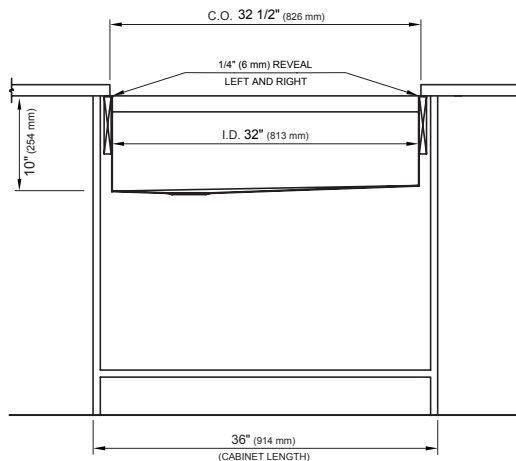

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255



California Faucets®

Davoli™

Pull-Down Kitchen Faucet - High Arc Spout

Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction including sprayhead
- 360° rotating spout with magnetic sprayhead docking
- One button control for aerated or spray stream
- Spray jets have easy-to-clean surface
- Quiet polymer-braided hose with rotating joint
- Ceramic disc cartridge
- Max flow rate: 1.8 gpm (6.8 L/min)

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- EPA WaterSense
- Commonwealth of MA
- ADA compliant

K10-100- PN




K10-100-42 shown

XX = Series handle



Handle Style	A	B	C
33	7-15/16" [202]	4-1/8" [105]	3-13/16" [97]
35	7-15/16" [202]	4-1/8" [105]	3-13/16" [97]
40	7-5/8" [194]	4" [102]	3-5/8" [92]
42	7-1/2" [329]	3-15/16" [100]	3-9/16" [229]
55	7-5/8" [194]	4" [102]	3-5/8" [92]
64	7-15/16" [201]	4-1/16" [103]	3-7/8" [98]
CLEV	8-1/8" [206]	4-3/16" [106]	3-15/16" [100]

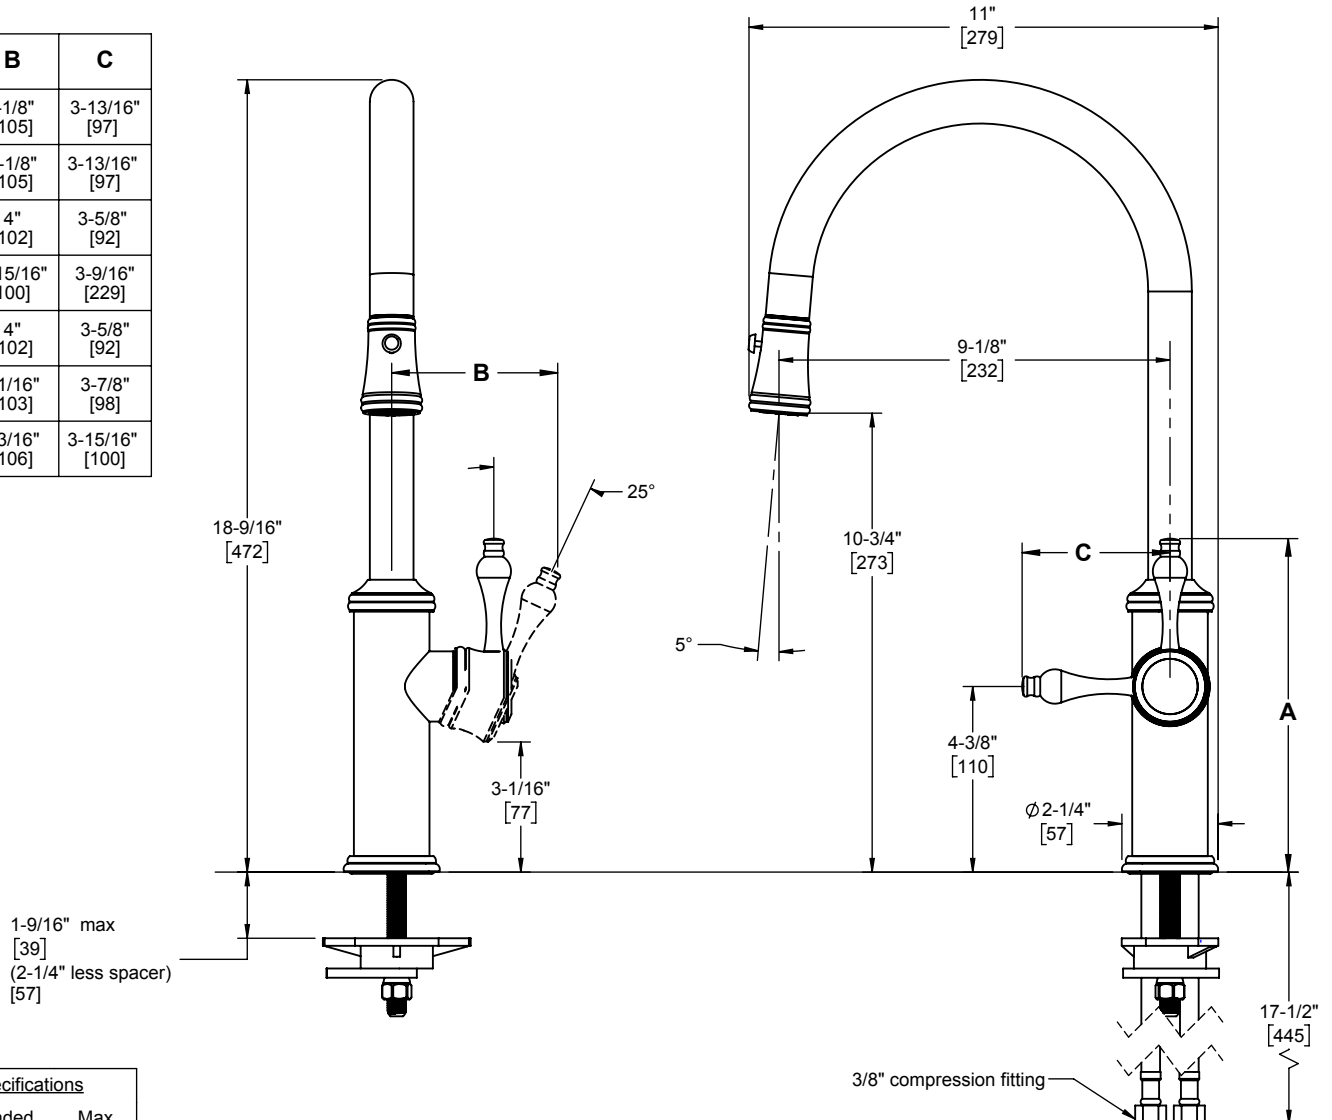

Through-Hole Specifications		
Min	Recommended	Max
Ø 1-1/4 [32]	Ø 1-3/8 [35]	Ø 1-3/8 [35]

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]



California Faucets®

Davoli®

Traditional Cold Only Water Dispenser

Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- 1/4" compression inlet
- Max flow rate: 1.8 gpm (6.8 L/min)
- Ceramic disc cartridge
- Compatible with RO filter units

9620-K10- PN

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant




9620-K10-61 shown



XX = Series handle

Handle Style	A	B
33	4-3/8" [111]	2-1/2" [64]
35	4-3/8" [111]	2-1/2" [64]
61	4-5/16" [110]	2-1/2" [64]
48	4-3/8" [111]	2-1/2" [64]

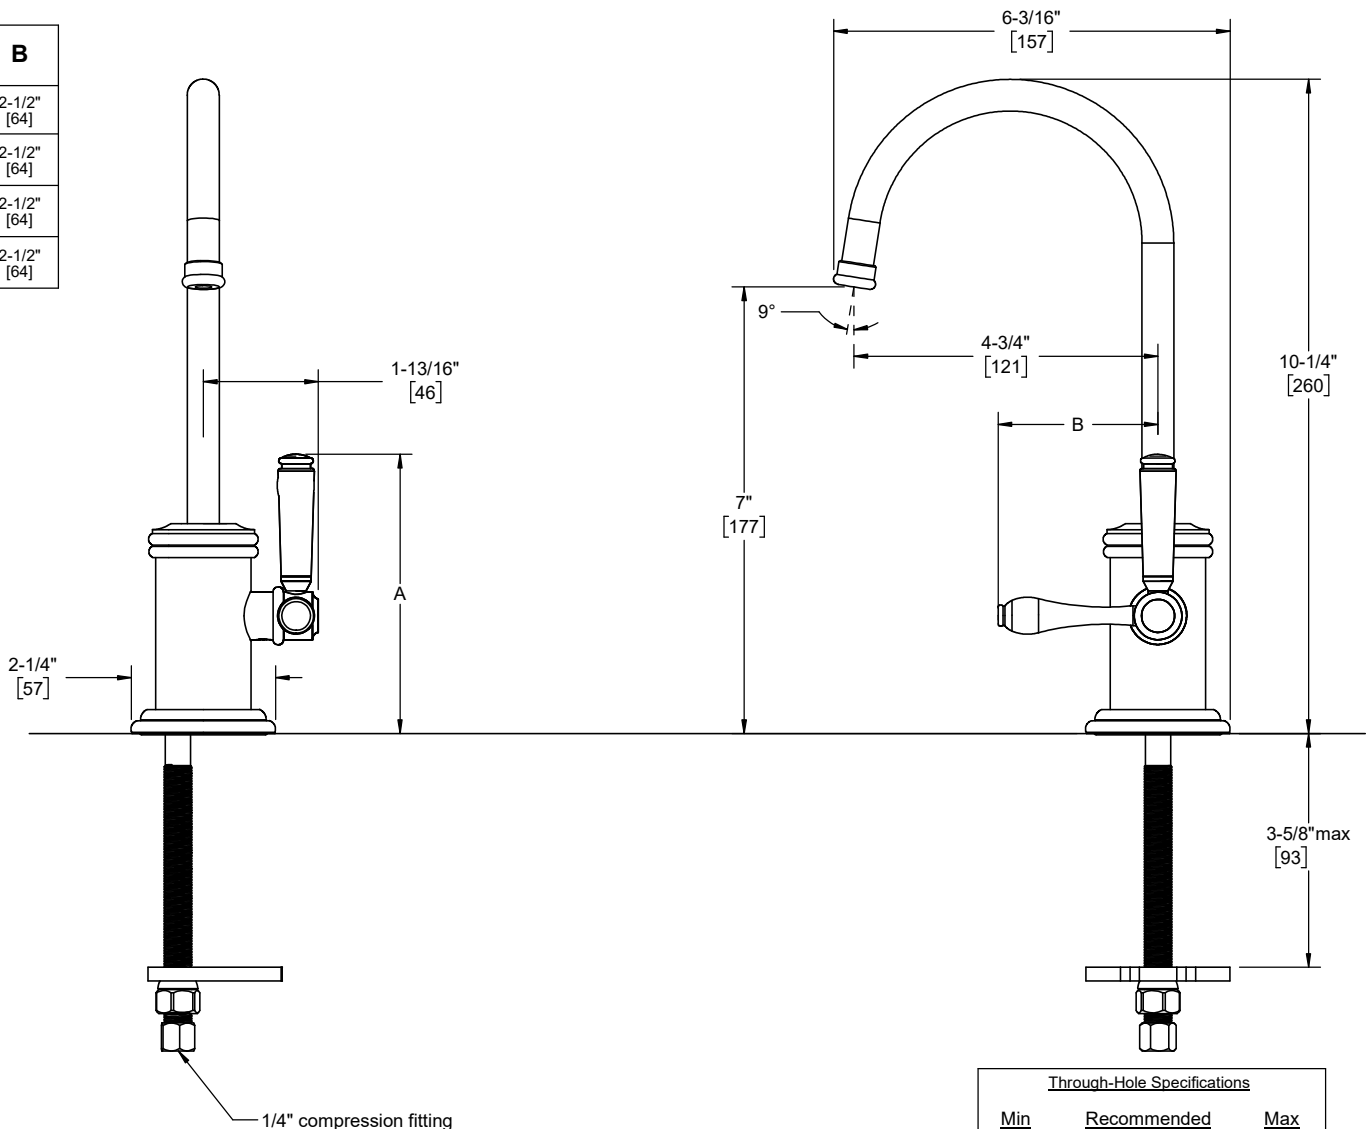

Through-Hole Specifications

Min	Recommended	Max
Ø 1/2" [13]	Ø 1" [25]	Ø 1-1/2" [38]

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]



California Faucets®

KITCHEN


AIR SWITCH TRIM FOR WASTE DISPOSER

Features

- Solid brass construction
- Requires control box (9615) sold separately
- Over 30 finishes including 15 PVD finishes


9611-K10

PN



THROUGH-HOLE SPECIFICATIONS:

MIN	RECOMMENDED	MAX
Ø1-1/4"	Ø1-1/4"	Ø1-3/8"

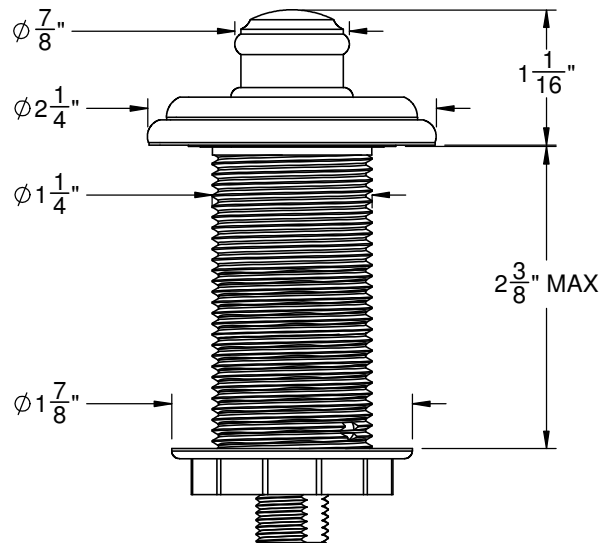

9610-K10, 9610-K30 9610-K50, 9610-K80, & 9610-K90 Air Switch for Waste Disposal Installation Instructions

CALIFORNIA FAUCETS RECOMMENDS THAT ALL PLUMBING & ELECTRICAL PRODUCTS BE INSTALLED BY A LICENSED PROFESSIONAL

IMPORTANT: Read all instructions prior to installation and provide copy of instructions to consumer.

Operating Specifications:

Recommended Electrical Supply Outlet Rating: 120V AC @ 15A Min.†


Controller Outlet Output Rating: 120V AC @ 13A (non-inductive) or 1/2 HP (.373 kW) @ 120V AC

† Local codes and ordinances may require a GROUND-FAULT CURRENT INTERRUPTER (GFCI) type.

I INSTALLING TO SINK/DECK/CABINET

IMPORTANT: Determine location of AIR SWITCH (1). Unit may be mounted on sink, deck or cabinet face. The recommended sink/deck/cabinet through-hole shall be $\varnothing 1\text{-}1/4"$ [32mm]. Maximum sink/deck/cabinet thickness should no greater than 2-3/8" [30mm]

- Place AIR SWITCH (1) through sink/deck/cabinet hole
- From underside or backside slide WASHER (2) and NUT (3) onto SHANK (1a); securely tighten NUT (3)

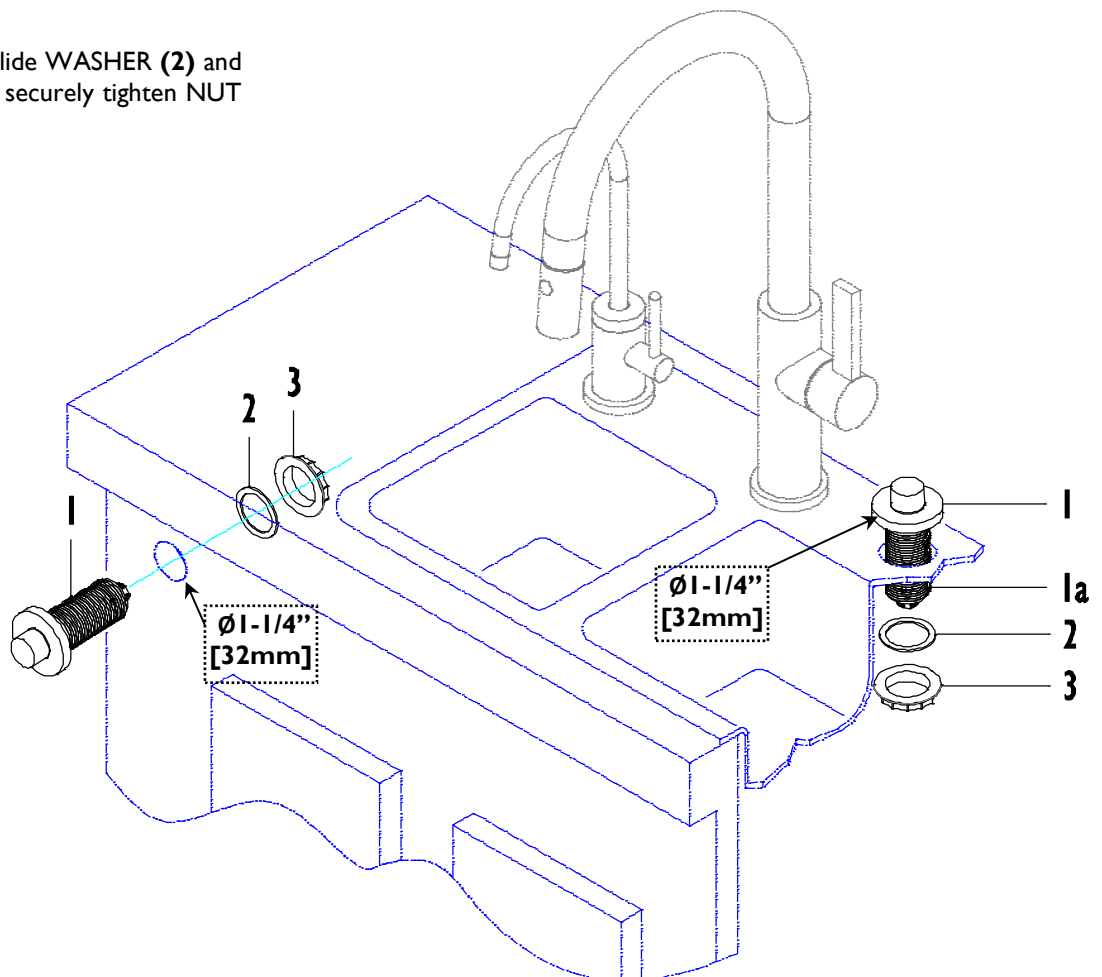

MOUNTING CONTROLLER

IMPORTANT: Determine location of **CONTROLLER (4)**. The location should be near the electrical **OUTLET (7)** and **DISPOSAL CORD (8a)**

- Mount **CONTROLLER (4)** to side or back wall under sink with two **SCREWS (5)** (not supplied)
- Slide **TUBE (6)** onto air switch **OUTLET (1d)** and the other end to controller **INLET (4a)**
- Insert **CONTROLLER CORD (4b)** into three-prong grounded **RECEPTACLE (7)**



NOTE: Three-prong grounded receptacle shall be in accordance with all local electrical codes and ordinances

NOTE: Some local codes may require a GFCI-protected receptacle

WARNING: When **DISPOSAL CORD (8a)** is plugged into **CONTROLLER OUTLET (4c)** the **DISPOSAL (8)** may turn on; to turn off **DISPOSAL (8)** press **AIR SWITCH (1)**


- Insert **DISPOSAL CORD (8a)** into one of the two **CONTROLLER OUTLET (4c)**

NOTE: The other **CONTROLLER OUTLET (4d)** may be used for other device (e.g. instant hot water tank); **DO NOT** use for dishwasher as this outlet switches OFF when **DISPOSAL (8)** is in use

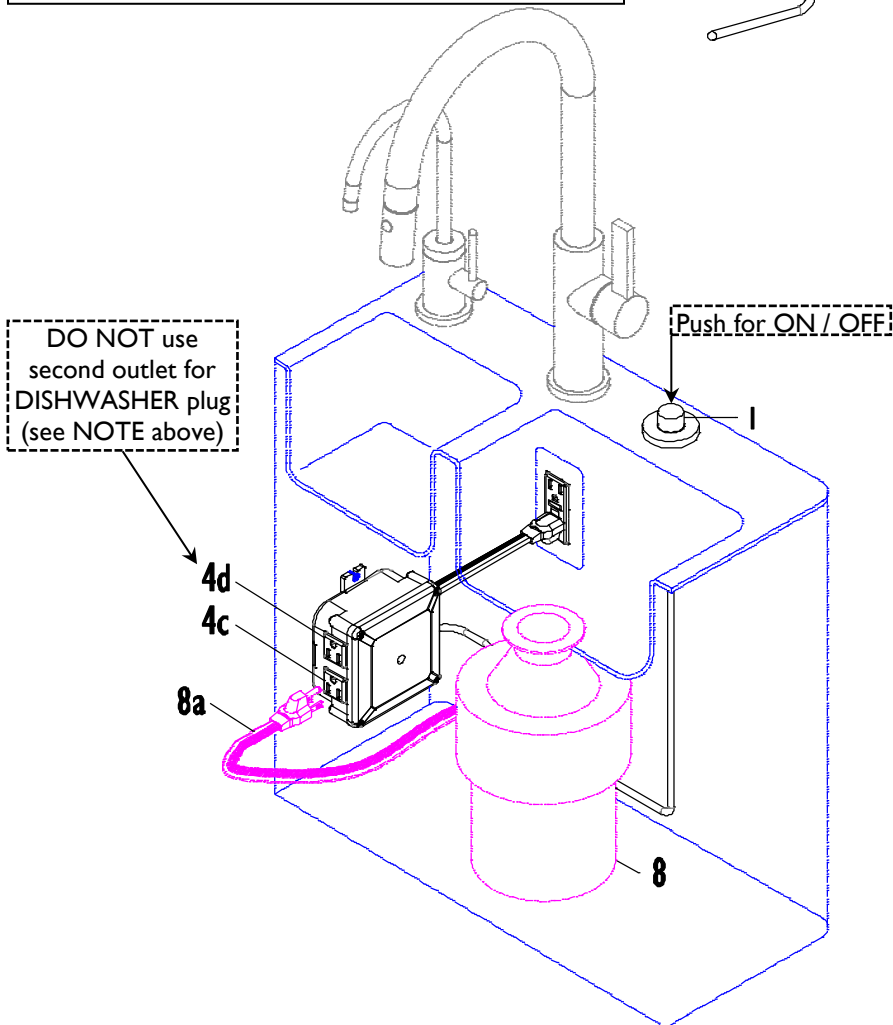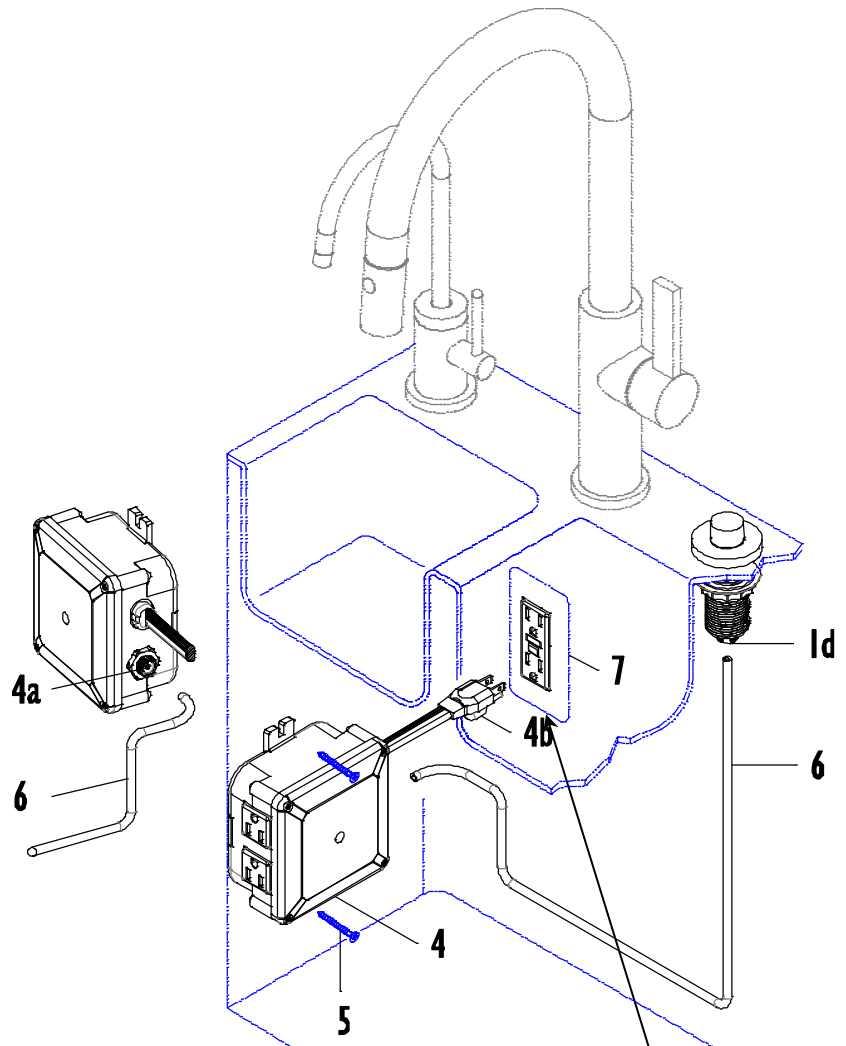

**THREE-PRONG
GROUNDED RECEPTACLE
15A MIN**
Follow all local electrical codes &
ordinances as some may require
GFCI-protected receptacle

STRESA, SOAP DISPENSER

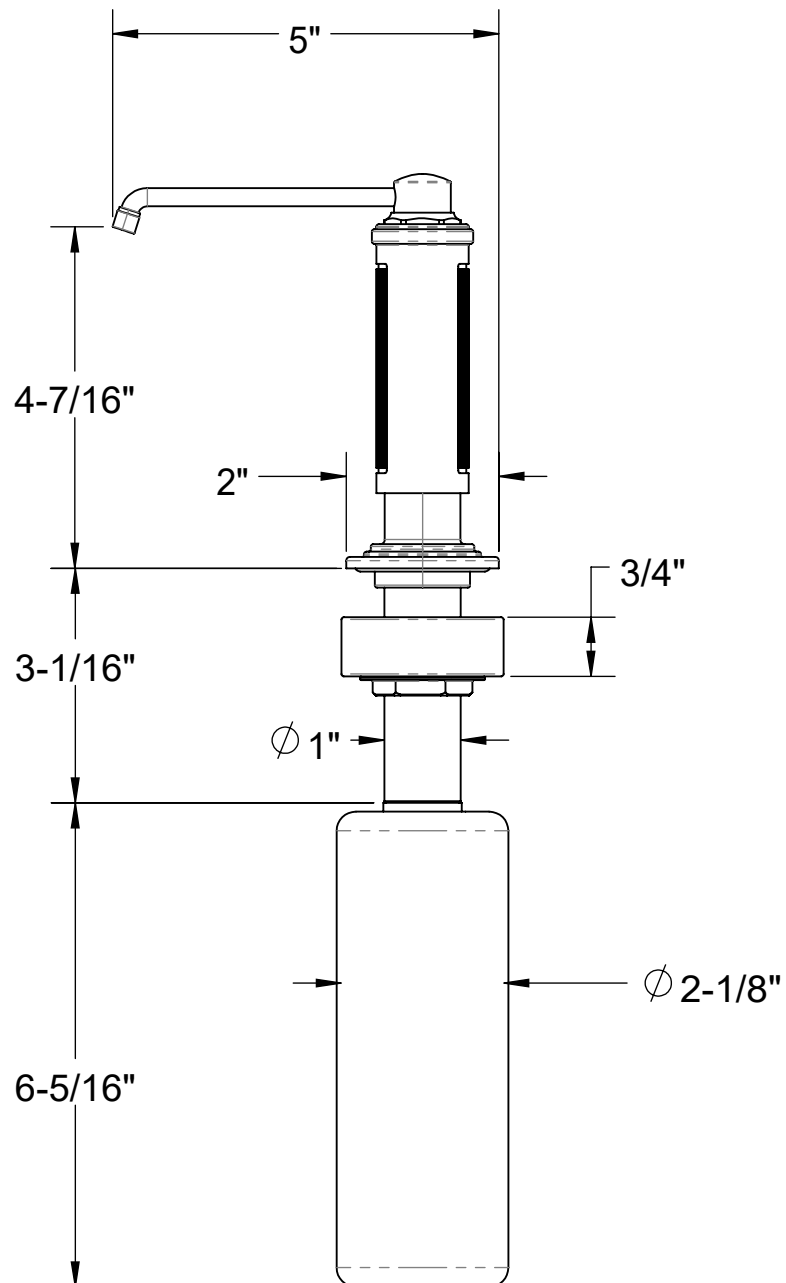

*DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA



ADVANCED SERIES

PRO 750®

Submittal Sheet


This model offers the following features and benefits:

- 3/4 HP long-lasting, Dura-Drive® Induction motor
- Quiet SoundSeal Technology® delivers quiet disposal operation
- Advanced Grind for tough and fibrous food scraps
- 3-Stage MultiGrind® Technology: Finest grind designed to prevent clogs
- EZ Connect Disposal easily connects to a hardwire connection or outlet
- Removable, Dishwasher Safe, Antimicrobial Quiet Collar® Sink Baffle
- Safe for use with properly maintained septic tanks
- Units Available: PRO 750® with EZ Connect Adapter or PRO 750® with EZ Connect Cord

Specifications

Type of Feed	Continuous
On/Off Control	Wall Switch
Motor	Single Phase
HP	3/4
Volts	120
HZ	60
RPM	1725
Amp. (Avg. Load)	9.5
Time Rating	Intermittent
Lubrication	Permanently Lubricated Upper & Lower Bearings
Shipping Weight (Approx.)	18.4, 18.6
Overall Height	12.25
Motor Protection	Automatic Reset
Average Water Usage	Approx. 1 Gallon per Person Per Day
Average Electrical Usage	3-4 KWH per Year
Drain Connection	1-1/2" cushioned slip joint
Dishwasher Drain Connection	Yes

Dimensions

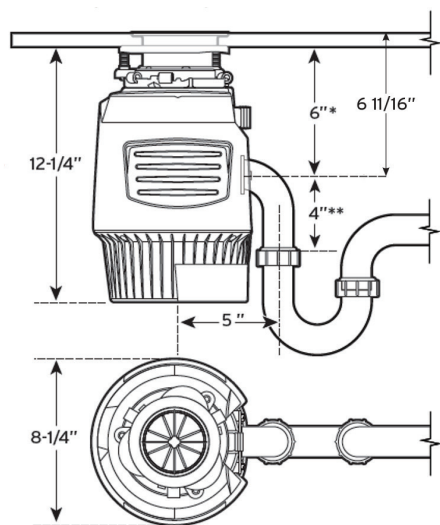

Sample Specification

Food Waste Disposer(s) shall be InSinkErator PRO 750®, continuous feed, with 3/4 HP. motor, stainless steel grinding elements with two stainless steel 360° swivel lugs. Exclusive self-service wrench.

Warranty

10-Year We Come to You® Limited In Home Warranty

* The complete InSinkErator warranty is included in the Care & Use Booklet packed with each unit.



Food waste is roughly 80% water. By using your disposal regularly, you can help divert food waste from landfills and reduce greenhouse gas emissions. Make sustainability a family affair by using your disposal. After all, the smallest changes can make the biggest impact.

Job Specifications



1-800-558-5700
www.insinkerator.com



K-11352

Disposal flange with stopper

Features

- Fits standard garbage disposal units 4-1/2" (114 mm) wide and 1-5/8" (41 mm) deep
- Includes disposal flange and stopper
- Fits standard garbage disposal units 4-1/2" (114 mm) wide and 1-5/8" (41 mm) deep



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BS	Brushed Stainless
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
VNT	Vintage Nickel
BGP	Vibrant Brushed Graphite
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 17:39 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



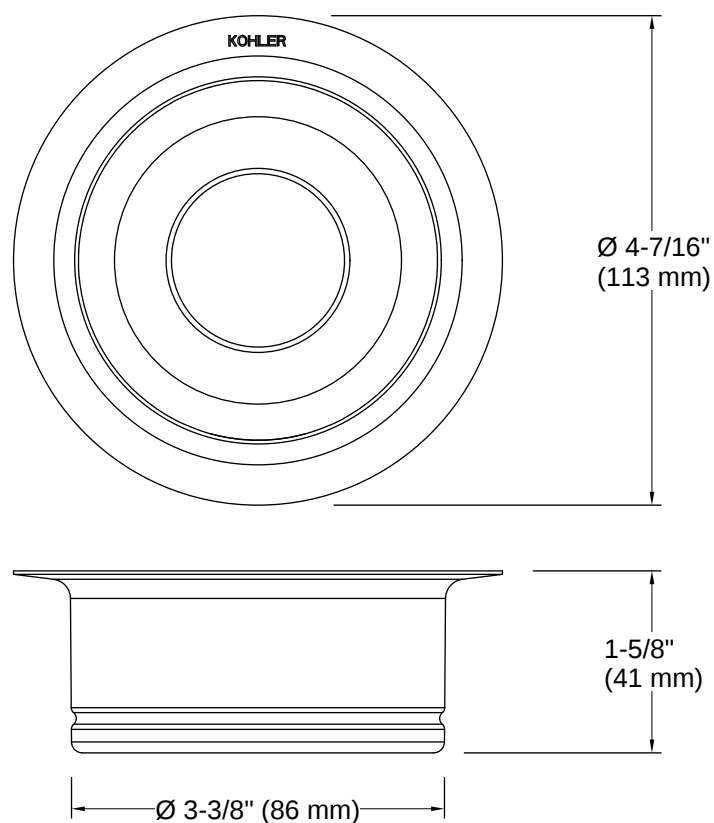

Installation Notes

Install this product according to the installation instructions.





17X20 SR/Drop In Laundry Sink White



Renaldi Single Handle Pull Down Kitchen Faucet - Lumicoat Polished Nickel

Florestone Model SR 17 Utility Sink

17" x 20" x 10³/₄"

SR-17-1 (1/Box):

Weight:

8 lbs.

SR-17-3 (3/Box):


27 lbs.

Architect's Specifications

Furnish and install Utility Sink Model SR 17 as manufactured by Florestone Products Co. Unit will be self-rimming.

Color will be white and will be resistant to fading and abrasion.

Unit to have 3¹/₂" drain opening.

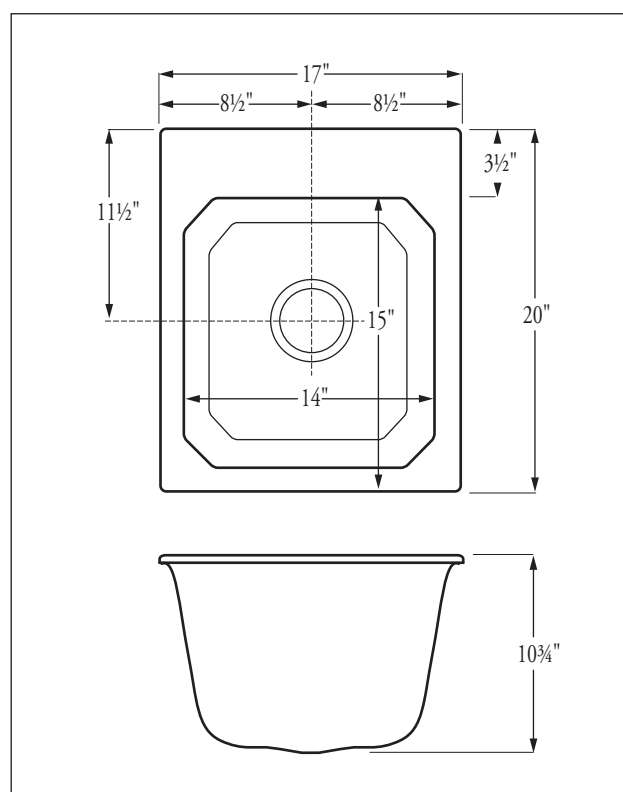

Bathing Area 52" x 32¹/₂" x 14"

Standards

I.A.P.M.O. Listed File 2647

ANSI-Z-124.6-97

CSA Test • Warnock Hersey Listed:

CAN/CSA-B45.0 - CAN/CSA-B45.5




FLORESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637

T. 559.661.4171 • T. 800.446.8827

F. 559.661.2070 • florestone.com

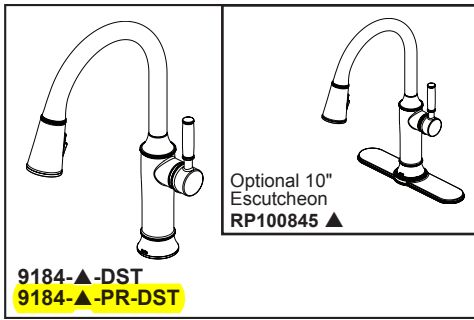

see what Delta can do™

KITCHEN FAUCETS

- Renaldi™ Collection
- Single Handle Pull-Down

FEATURES:

- DIAMOND Seal® Technology
- MagnaTite® Magnetic Docking
- Touch-Clean® Spray Holes
- ProClean™ Spray
- Lumicoat® Finish (-PR models only)
- Lumicoat® Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas.

STANDARD SPECIFICATIONS:


- Max flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- One or three hole mount (10" escutcheon optional, not included)
- Diamond coated ceramic cartridge
- 3/8" O.D. straight, staggered PEX supply tubes
- Spout rotates 360°
- Three-function wand; aerated stream, spray and ProClean™ Spray
- Dual integral check valves in sprayer

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- NSF/ANSI/CAN 61 & 372
- ICC/ANSI A117.1 - Valve control only

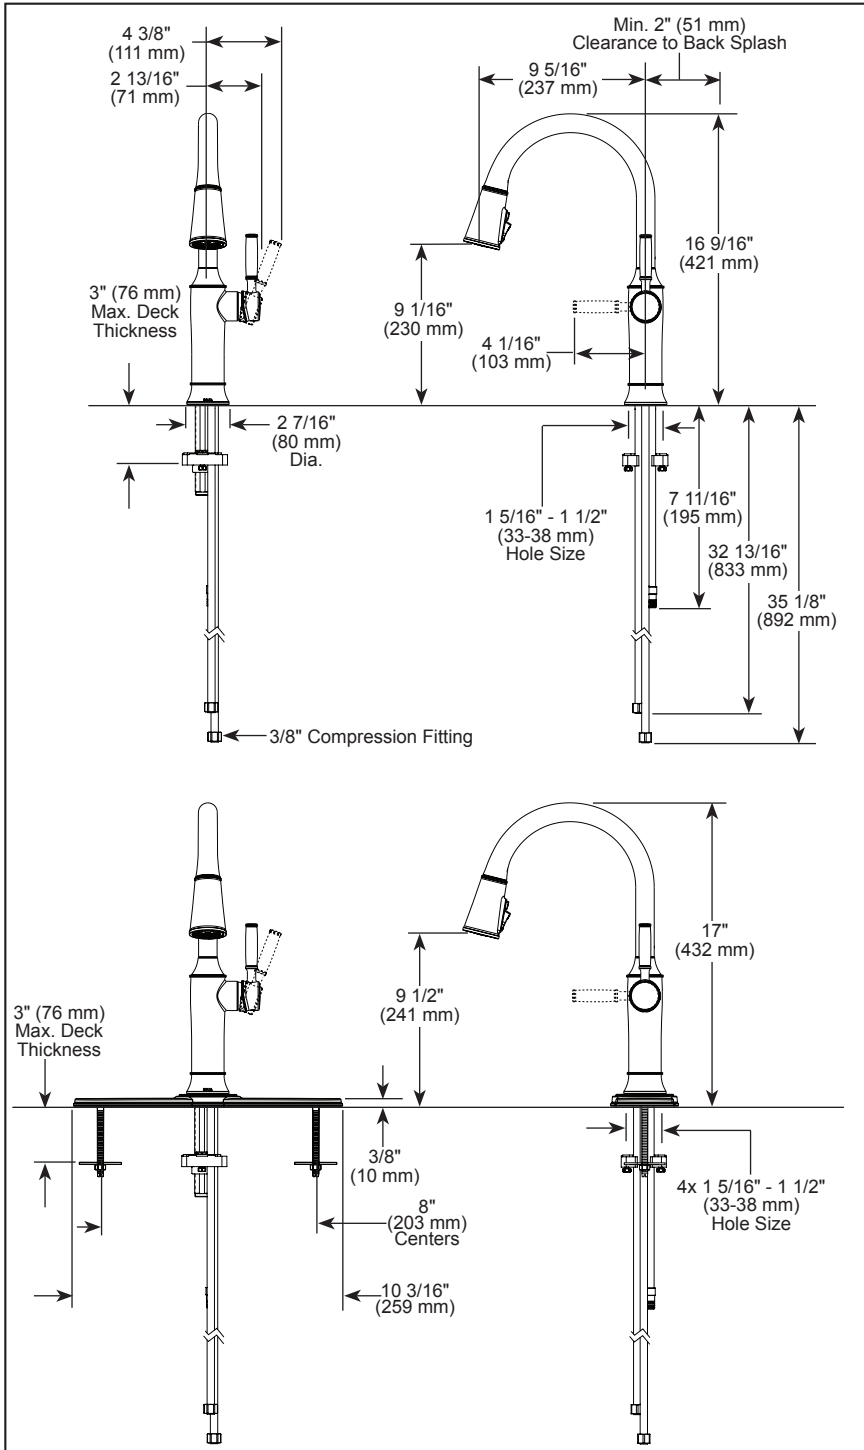

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-K-9184-DST Rev. B

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company



Trousdale 8" Widespread Lavatory Faucet - French Gold



Derring 19 1/2" Oval Undermount Bathroom Sink - Translucent White



Corbelle Two Piece Elongated Toilet With Skirted Trapway, 1.28 GPF - White



Cachet Readylatch Quiet Close Elongated Toilet Seat - White



Corbelle Left Hand Trip Lever - Vibrant Brushed Moderne
Brass



California Faucets®

CHRISTOPHERGRUBB Collection


Trousdale™

Widespread Lavatory Faucet

Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- Φ 1-1/4" all brass touch style pop up drain assembly
- 1.2gpm (4.5 L/min) max flow rate

C102
C102X
C102XS

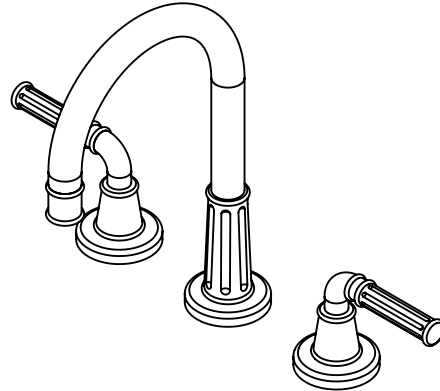


C102-ZZ shown



Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- EPA WaterSense
- Commonwealth of MA
- ADA compliant (lever only)

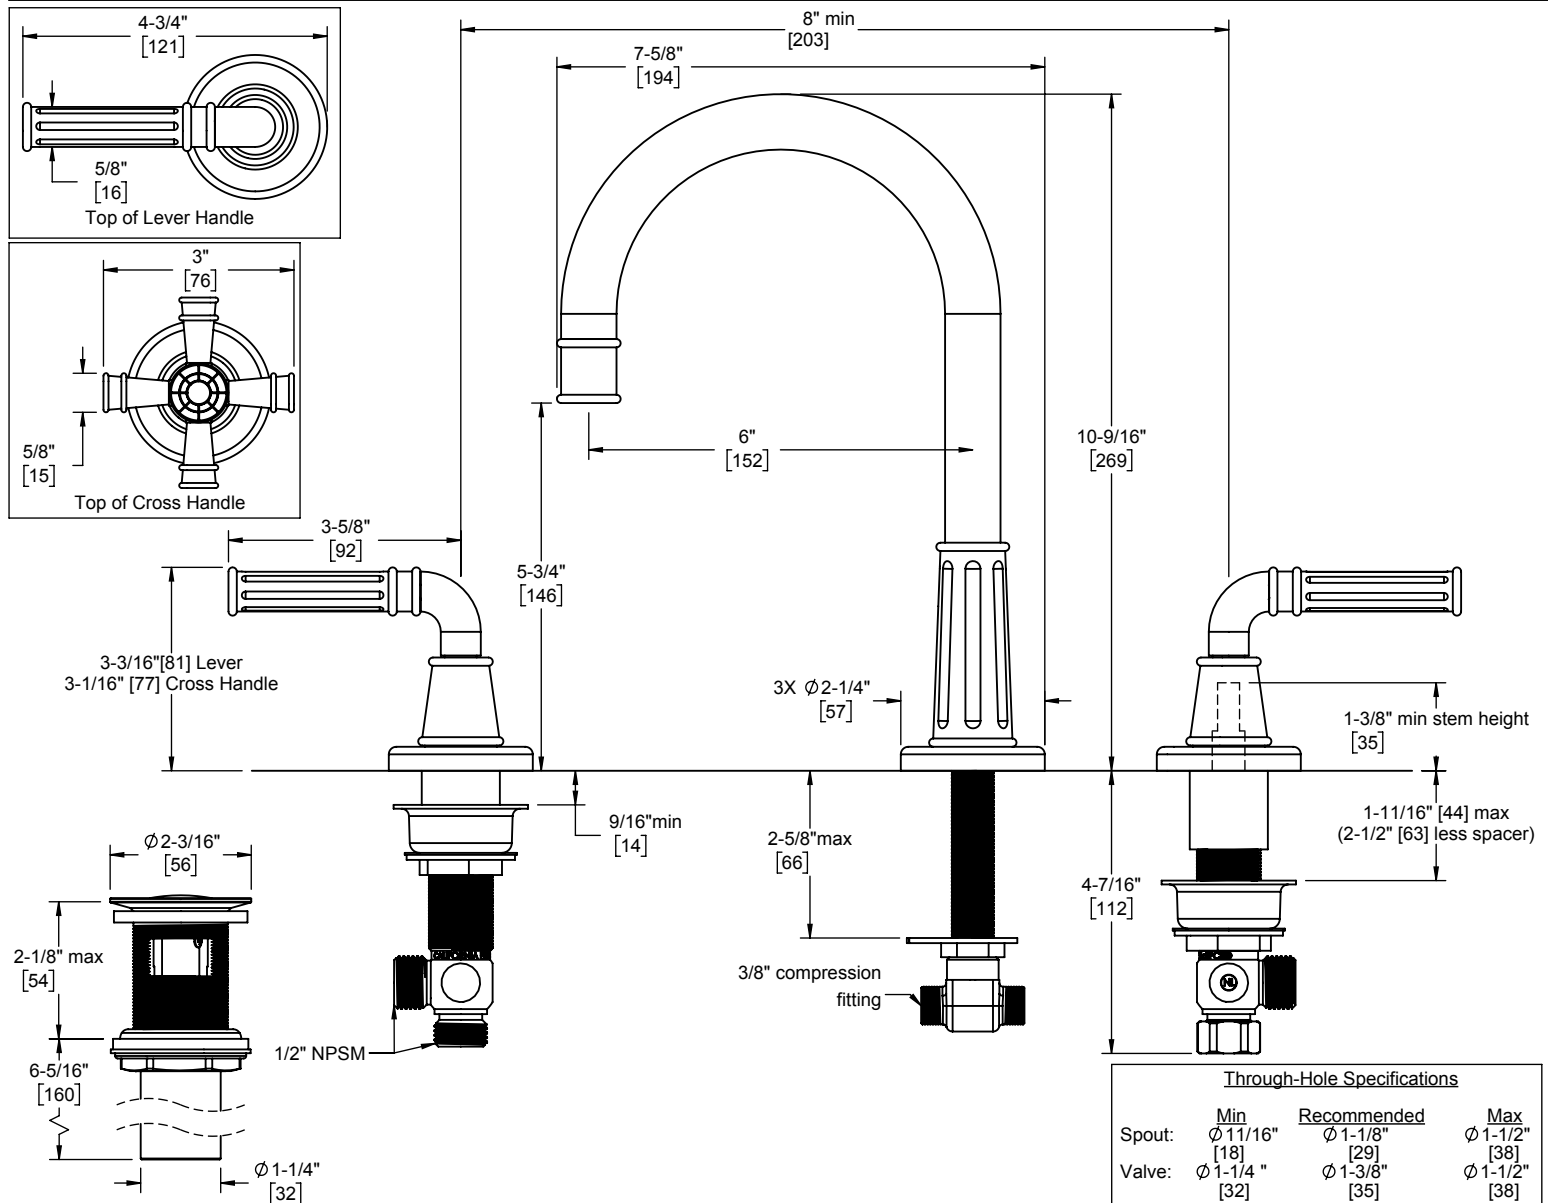

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]



Derring® | K-17889-RL

19-1/2" oval undermount bathroom sink

Features

- Oval basin with carved textural pattern
- Artisanal glazes are easy to care for and durable
- Neutral hues complement a wide range of fixtures and faucets
- Natural glaze variations make each sink unique yet beautifully complementary when paired side-by-side
- Fits KOHLER® Caxton 14" x 17" (355.5 x 432 mm) countertop cutout
- No faucet holes; requires wall- or counter-mount faucet



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|-----|-------------------|
|  | RB2 | Bourbon Rutile |
|  | RB3 | Bluestone Rutile |
|  | K8 | Translucent White |
|  | RB1 | Not Applicable |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 17:5 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

Technical Information

Basin Configuration:	Single Bowl
Basin Length:	17" (432 mm)
Basin Width:	14" (356 mm)
Basin Depth:	5-1/4" (133 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment

K-23725 Cast iron cleaner

Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty






1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 17:5 - US-CA

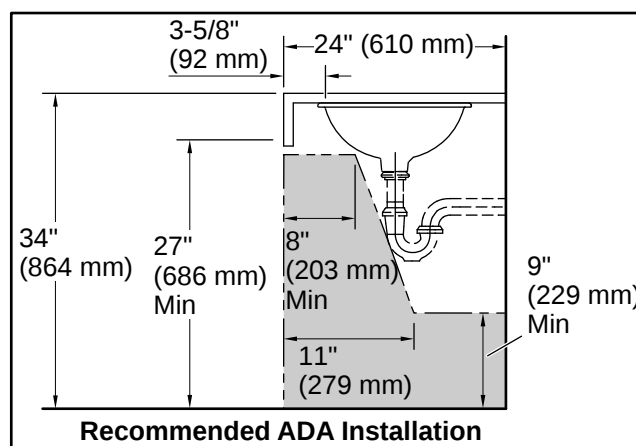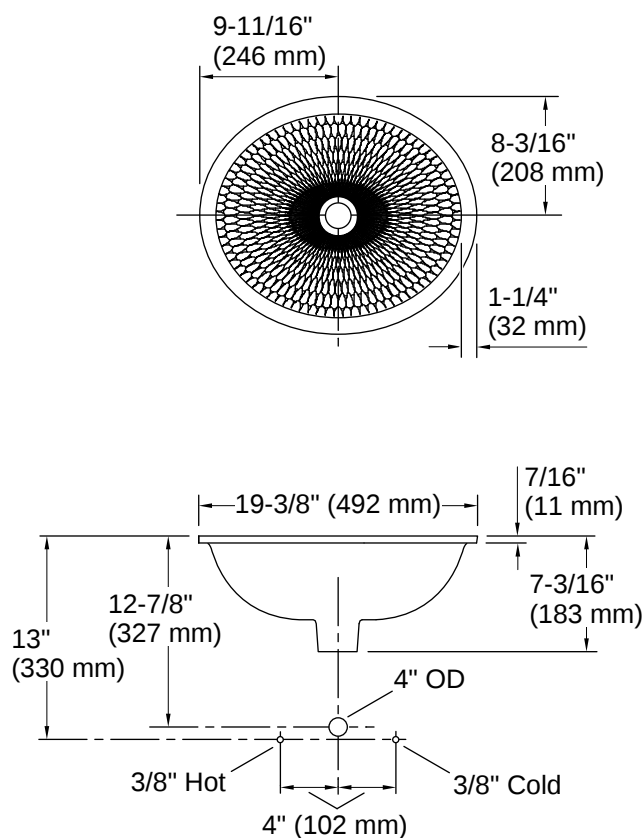

Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

NOTICE: Countertop manufacturer or cutter must use the current product template available at www.kohler.com, or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cutout template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 17:5 - US-CA



Corbelle® | K-4144

Elongated toilet bowl with skirted trapway

Features

- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Revolution 360® flushing technology generates a forceful swirling motion to keep the bowl clean longer
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- CleanCoat™ surface treatment inhibits the growth of water scale and mineral stains for improved ease of cleaning
- Combines with the K-4143, K-4143-RA, or K-5711 tank to create a complete K-3814, K-3814-RA, or K-5709 Corbelle toilet
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 17:12 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.19.2/CSA B45.1

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Revolution 360
Bowl Shape:	Elongated
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted

Recommended Products/Accessories

K-23726 Drain treatment
K-4143 Toilet tank, 1.28 gpf

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.
This product is a component and not intended to be a standalone installation.

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Seat sold separately

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.





Corbelle® | K-4143

Toilet tank, 1.28 gpf

Features

- 1.28 gpf (4.8 lpf)
- Combines with the K-4144 bowl to create a complete K-3814 Corbelle toilet
- Alternative options available: Corbelle toilet tank with ContinuousClean - K-5711
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Left-hand trip lever



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 16:0 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ASME A112.19.2/CSA B45.1
EPA WaterSense®

Technical Information

Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)

Recommended Products/Accessories

K-23726 Drain treatment

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.

This product is a component and not intended to be a standalone installation.

Installation

- Supply line sold separately
 - Supply line sold separately
-

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.





Cachet® | K-4636-RL

ReadyLatch® Quiet-Close™ elongated toilet seat

Features

- Grip-Tight installation hardware makes it easy to fasten the seat – everything is done from above the bowl
- ReadyLatch® hinge provides a positive lock/unlock latch to securely hold seat in position, yet seat easily removes for cleaning or adjusting fit
- Quiet-Close™ elongated lid and seat prevents slamming
- Grip-Tight bumpers hold seat firmly in place
- Contoured seat for user comfort
- Color-matched plastic hinges
- Fits most elongated toilets



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:53 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

IAPMO/ANSI Z124.5

Technical Information

All product dimensions are nominal.

Seat Shape Type:	Elongated
Seat Front Type:	Closed-front
Seat-Mounting Holes:	5-1/2" (140 mm)

Material

- Plastic construction


Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:53 - US-CA

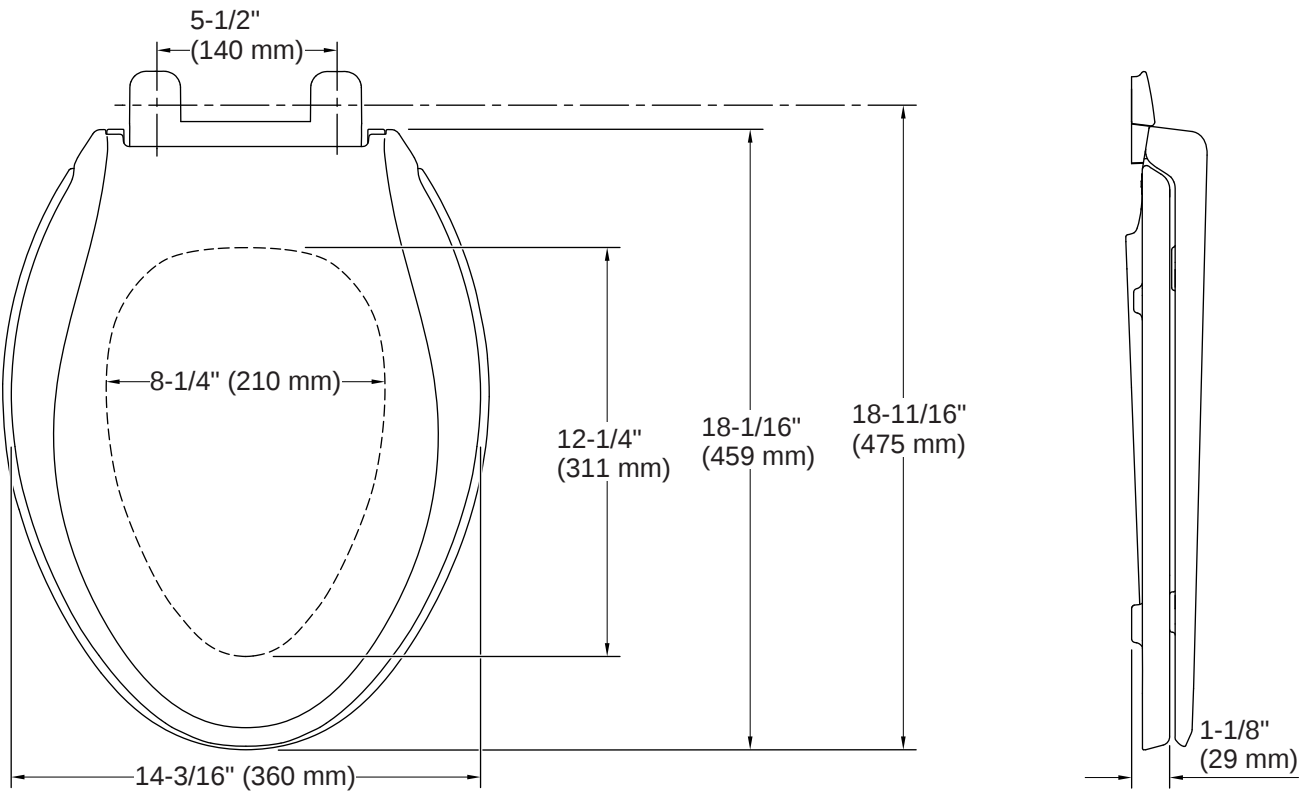

Installation Notes

Install this product according to the installation instructions.





Corbelle® | K-20120-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-3814 Corbelle toilet



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
G	Brushed Chrome
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium
BGP	Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:31 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



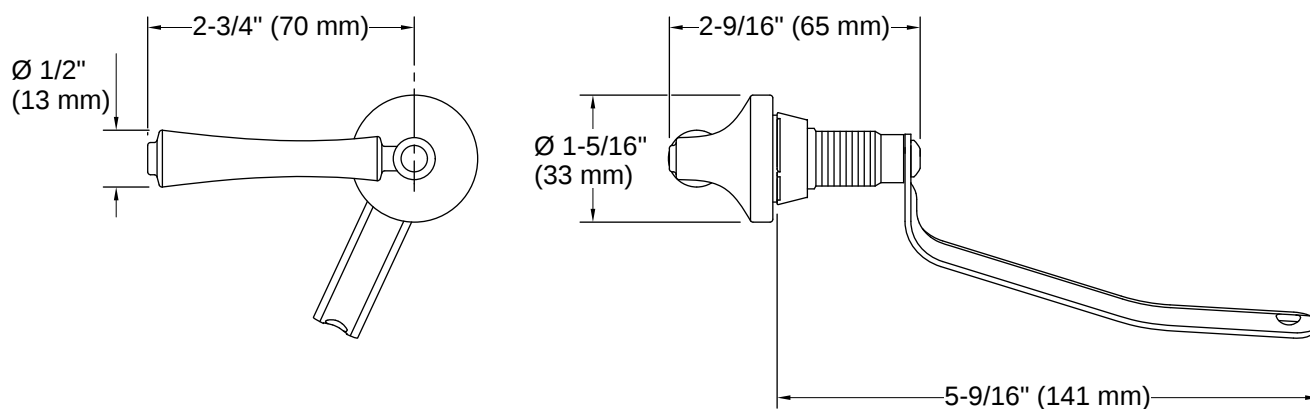

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)
 Kohler Co. reserves the right to make revisions without notice to product specifications.
 For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
 3-27-2026 19:31 - US-CA



Memoirs 20" Rectangular Undermount Bathroom Sink - White



Essencia 7236 Oval Oval Drop-In Air Tub - White



Corbelle Two Piece Elongated Toilet With Skirted Trapway, 1.28 GPF - White



Cachet Readylatch Quiet Close Elongated Toilet Seat - White



Corbelle Left Hand Trip Lever - Vibrant French Gold



Palladian Widespread Lavatory Faucet - Italian Brass



Jeeves Model E Curved 16" Wide 12 Bar Hardwired Towel Warmer - Satin Brass



Palladian 3/4" Thermostatic Trim Without Volume Control - Italian Brass




Palladian Trim For Volume Control And Diverter - Italian Brass



4" 3-Function Handshower - Italian Brass



Palladian 24" Slide Bar - Italian Brass

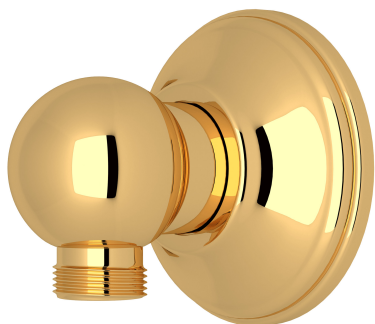

Handshower Outlet - Italian Brass



79" Metal Shower Hose - Italian Brass



Rohl 1085/8IB

1.8 GPM Multi Function Shower Head

Finish: Italian Brass

Qty: 1



Rohl 1440/6IB

Shower 6-13/16" Wall Mounted Shower Arm and Flange

Finish: Italian Brass

Qty: 1



Site Sizable Series 48" PVC Low Profile Complete Kit With 2 1/2" Tile Insert Frame - Polished Gold



Palladian 4 Hole Deck Mount Tub Filler - Italian Brass

SPECIFICATIONS

DESCRIPTION

- Lift rod drain assembly included with faucet
- 1/2" NPT male inlet

FLOW

- 1.2 GPM/4.5 LPM at 60 PSI (WaterSense and CEC compliant)

STANDARDS

- ASME A112.18.1/CSA B125.1
- NSF 61/9 & 372 Q ≤ 1
- CEC Compliant

WARRANTY


- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.



Palladian®

Widespread Lavatory Faucet With Low Spout

MODEL: A1908

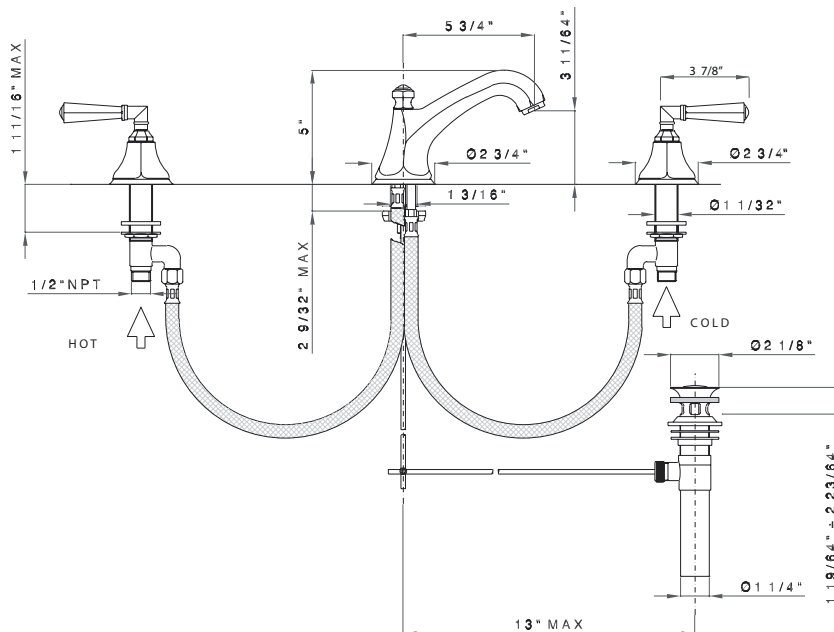

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
 1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
 QUÉBEC / MARITIMES / OUEST CANADIEN
 QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
 1-866-473-8442

ONTARIO
houseofrohl.ca/support
 1-800-287-5354



Memoirs® | K-2339

20" rectangular undermount bathroom sink

Features

- Refined rectangular basin
- No faucet holes; requires wall- or counter-mount faucet
- Coordinates with other products in the Memoirs collection



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	NY	Dune
	95	Ice Grey
	7	Black Black
	17	Teal
	42	Aspen Green



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

Technical Information

With Overflow:	Yes
Drain Hole Diameter:	1-3/4" (44 mm)
Basin Configuration:	Single Bowl
Basin Length:	18-7/16" (468 mm)
Basin Width:	14-13/16" (376 mm)
Basin Depth:	7-1/8" (181 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment

K-23725 Cast iron cleaner

Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty





1-800-4KOHLER (1-800-456-4537)


Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.



3-30-2026 21:0 - US-CA

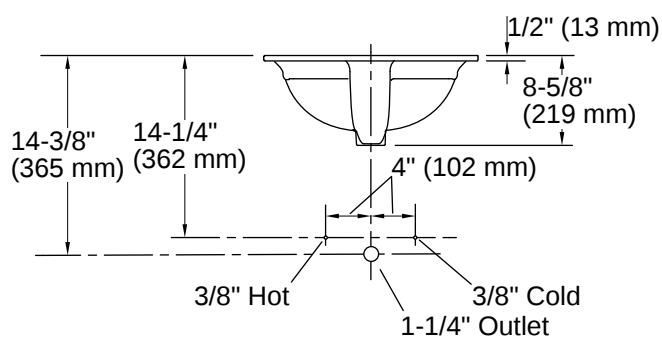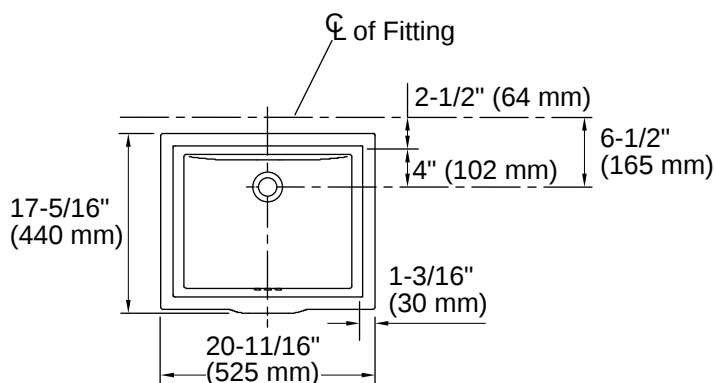

Standard Installation

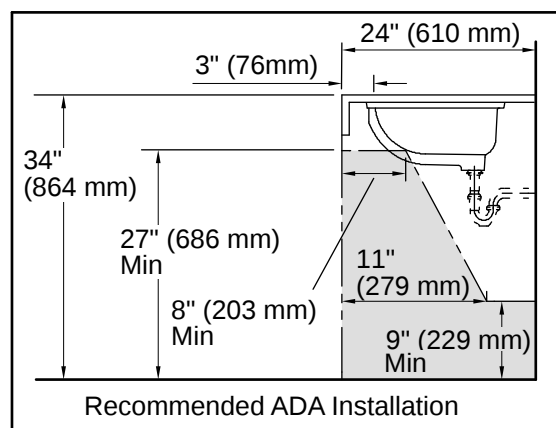

Recommended ADA Installation



Installation

Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

NOTICE: Countertop manufacturer or cutter must use the current product template available at www.kohler.com, or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cutout template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-30-2026 21:0 - US-CA

SPECIFICATIONS

DESCRIPTION

- 3 functions

FLOW

- 1.8 GPM/6.7 LPM at 60 PSI (CEC compliant)

STANDARDS

- A112.18.1/ CSA B125.1
- CEC

WARRANTY



- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.



4" 3-Function Showerhead

MODEL: 1085/8

UPC®

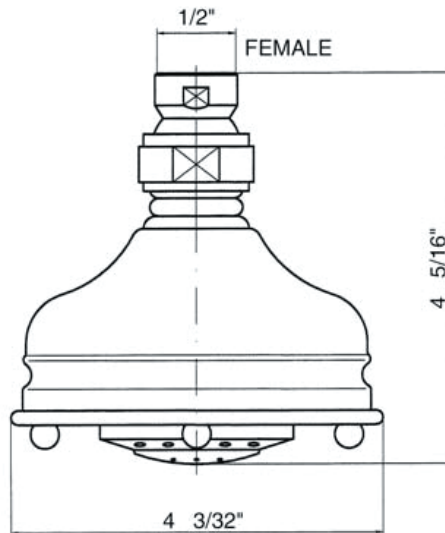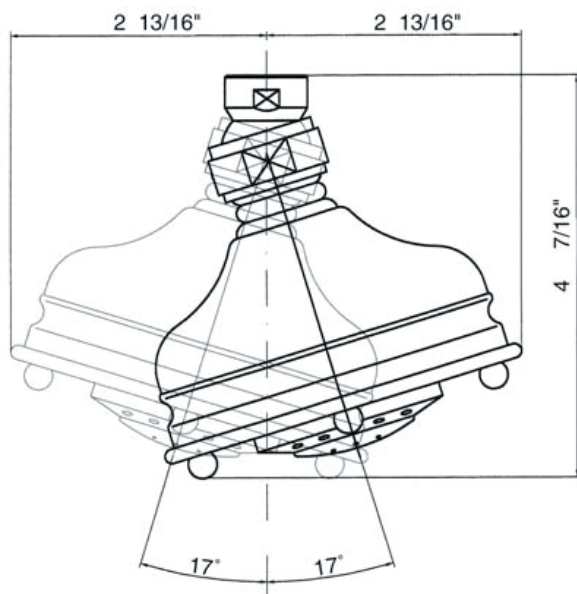

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

ONTARIO
houseofrohl.ca/support
1-800-287-5354

ROHL

Authentic Luxury for Kitchen and Bath®

www.rohlhome.com



Shower Arm

ROHL Shower Collection

1440/6 6" Shower Arm

1440/8 8" Shower Arm

FEATURES

- Brass construction
- Sliding escutcheon
- 1/2" male thread inlet supply
- 1/2" male thread outlet supply


COLORS/FINISHES

- Polished Chrome
- Polished Nickel
- Satin Nickel
- Tuscan Brass
- Inca Brass
- Old Iron


WARRANTY

- 2 years on manufacturer defects*

* No Warranty On Tuscan Brass Finish (TCB)

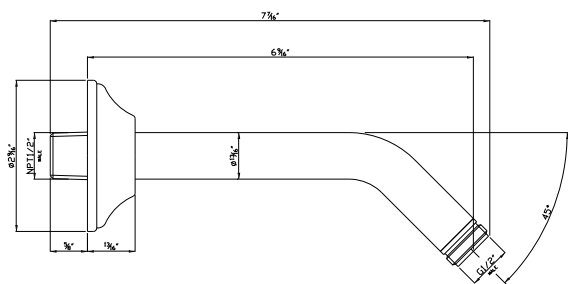

1440/6

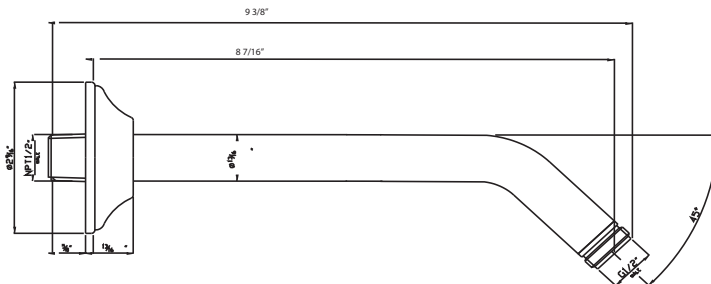

1440/8

SPECIFICATIONS

DESCRIPTION

- Trim plate and temperature control for Palladian collection.
The lever handle is shown. A cross handle is available.
For use with the 1005N rough.
- All brass trimplate, escutcheon, and handle
- Temperature control includes pre-set safety stop with override
- Must order 1005N rough to complete

WARRANTY


- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit riobel.ca for complete product and finish warranty.





Palladian

3/4" Thermostatic Trim Without Volume Control

MODEL: A4814LM (Metal Lever)
A4814XM (Cross Handle)

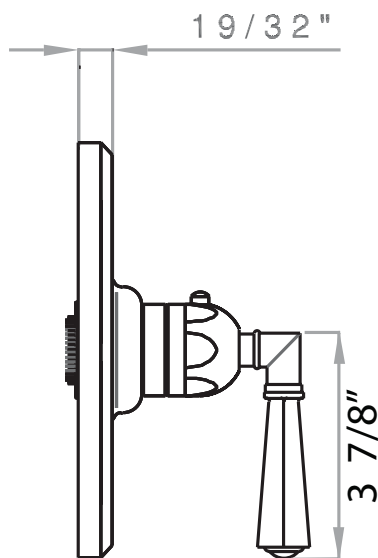

A4814LM

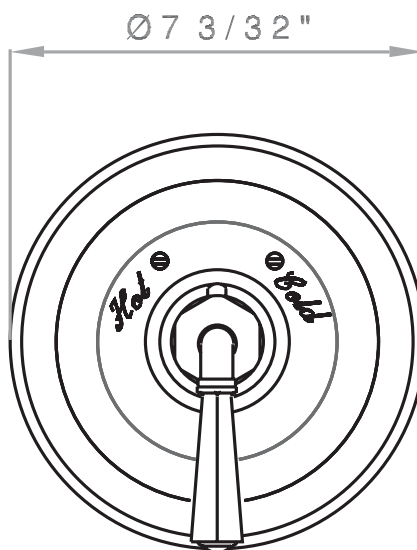

A4814XM

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

ONTARIO
houseofrohl.ca/support
1-800-287-5354

DESCRIPTION

- 3/4" female NPT inlet
- Temperature control only
- Must order trim to complete
- Must add volume control R1040R

FLOW


- 46 L/min, 12 gpm (US) 60psi

STANDARDS

- ASME A112.18.1 / CSA B125.1
- ASSE 1016

WARRANTY



- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.

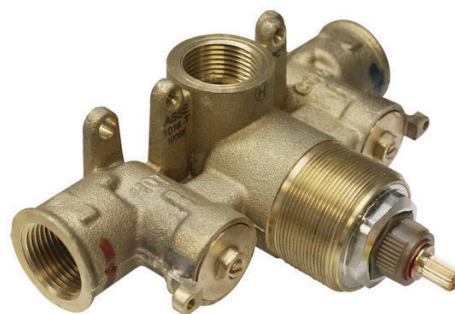SPECIFICATIONS

3/4" Thermostatic Rough-In Valve

MODELS: 1005N

cUPC®

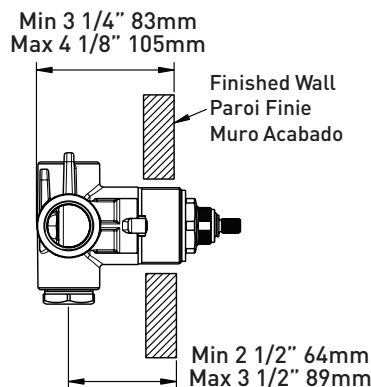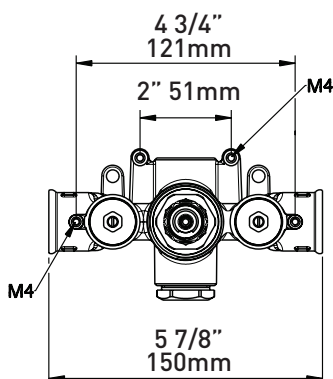**For warranty or additional information, contact:**

U.S.A.
houseofrohl.com/support
 1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
 QUÉBEC / MARITIMES / OUEST CANADIEN
 QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
 1-866-473-8442

ONTARIO
houseofrohl.ca/support
 1-800-287-5354

Riobel**PERRIN & ROWE**
LONDON

victoria ⊕ albert®

ROHL

SPECIFICATIONS

DESCRIPTION

- Volume control or diverter only
- Rough valve sold separately. Select one:
 - Order R1040R 3/4" volume control rough valve
 - Order R1062B0 4-port, 3-way dedicated diverter rough valve

WARRANTY



- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.



Palladian®

Trim For Volume Control And Diverter

MODEL: A4812

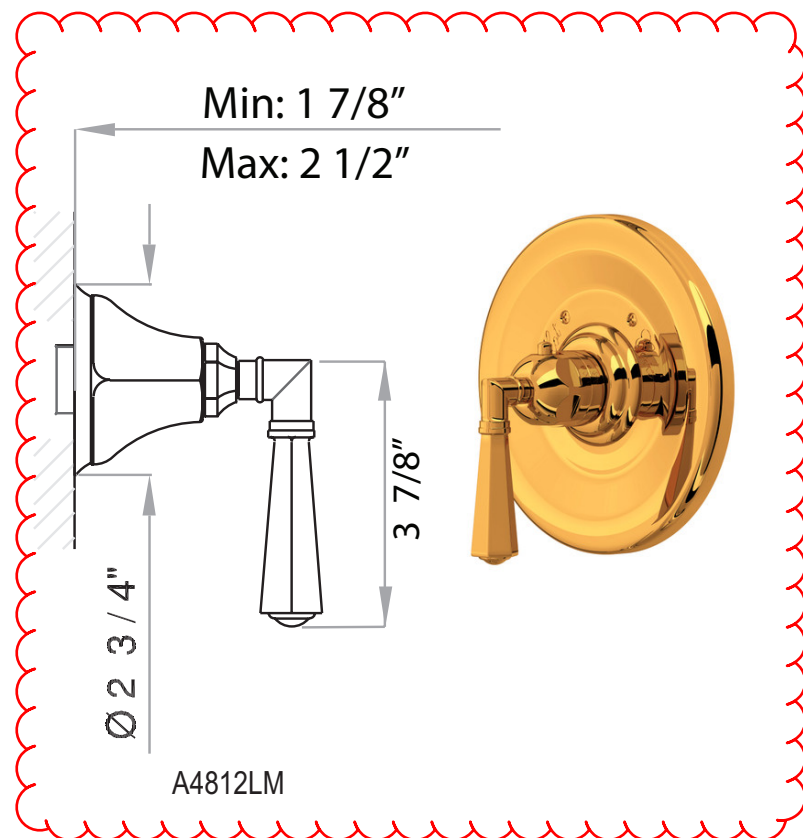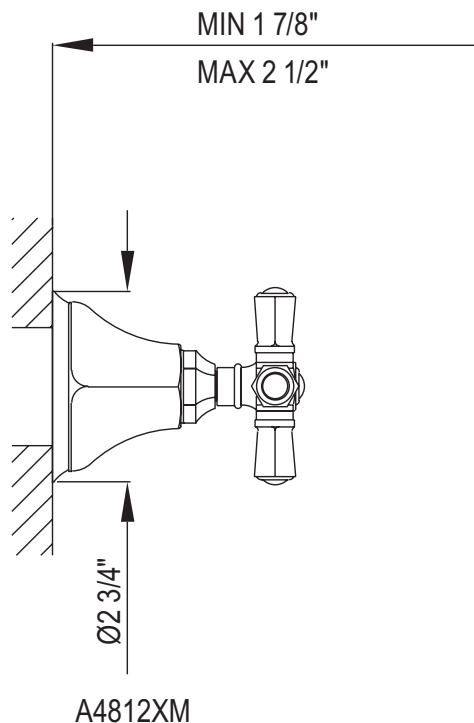

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

ONTARIO
houseofrohl.ca/support
1-800-287-5354

SPECIFICATIONS

DESCRIPTION

- Order R1041R for clockwise functionality
- 1 function
- 3/4" female NPT inlet
- Must order trim to complete
- Includes 2 5/8" extension kit. Extension may be cut to length required.

FLOW

- 14 GPM/53 LPM at 60 PSI


WARRANTY

- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.



3/4" Counterclockwise Volume Control
Rough-In Valve

MODEL: R1040R

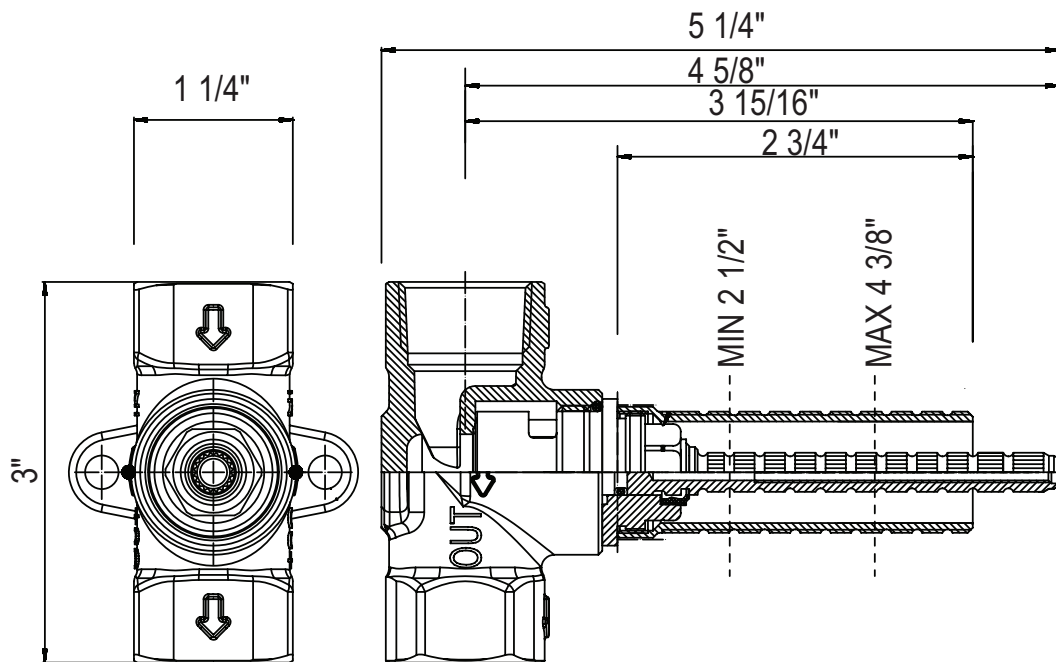

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

ONTARIO
houseofrohl.ca/support
1-800-287-5354

SPECIFICATIONS

DESCRIPTION

- Metal handshower handle
- 3 functions

FLOW

- 1.8 GPM/6.7 LPM at 60 PSI (WaterSense and CEC compliant)

STANDARDS

- A112.18.1/ CSA B125.1
- CEC

WARRANTY

- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.




4" 3-Function Handshower

MODEL: 1151/8



cUPC®

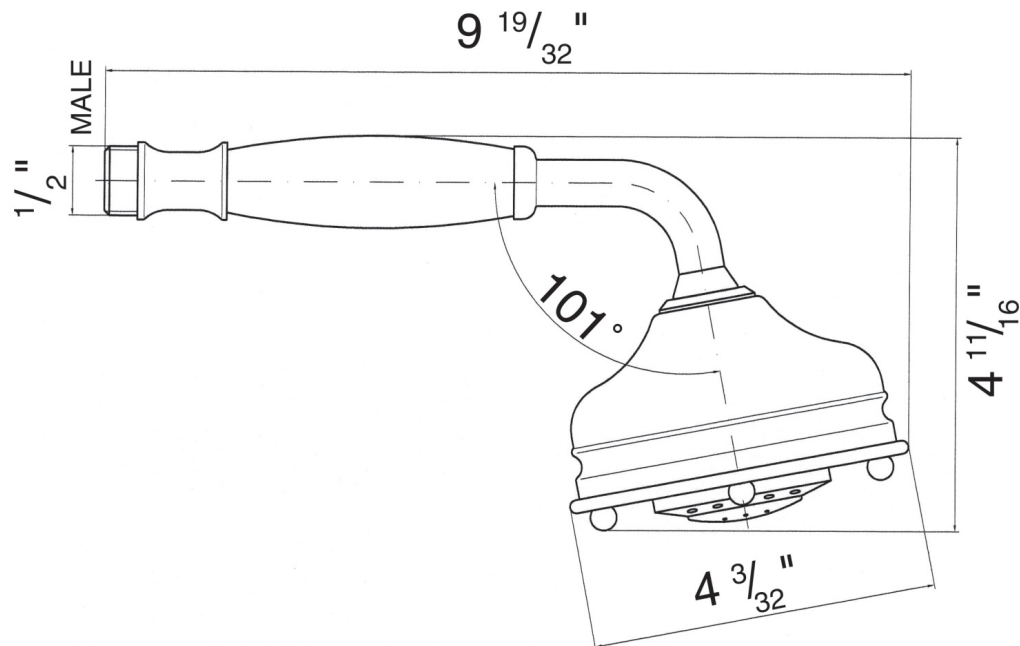

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

ONTARIO
houseofrohl.ca/support
1-800-287-5354

SPECIFICATIONS

DESCRIPTION

- Length can be cut down
- Ø 3/4" (18mm) slide bar
- Complements Palladian® collection and other transitional designs


WARRANTY

- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.



24" Slide Bar

MODEL: 1230

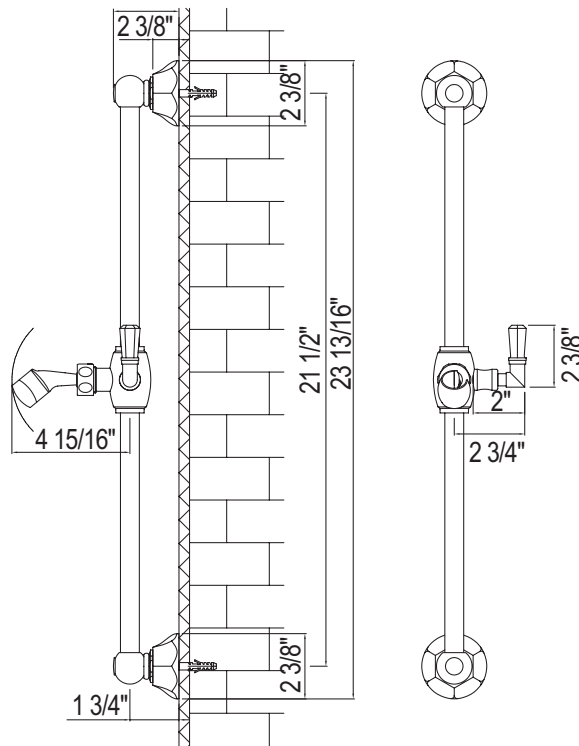

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

ONTARIO
houseofrohl.ca/support
1-800-287-5354

SPECIFICATIONS

DESCRIPTION

- 1/2" outlet male; 1/2" inlet female NPT


WARRANTY

- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.



Handshower Outlet

MODEL: 1295

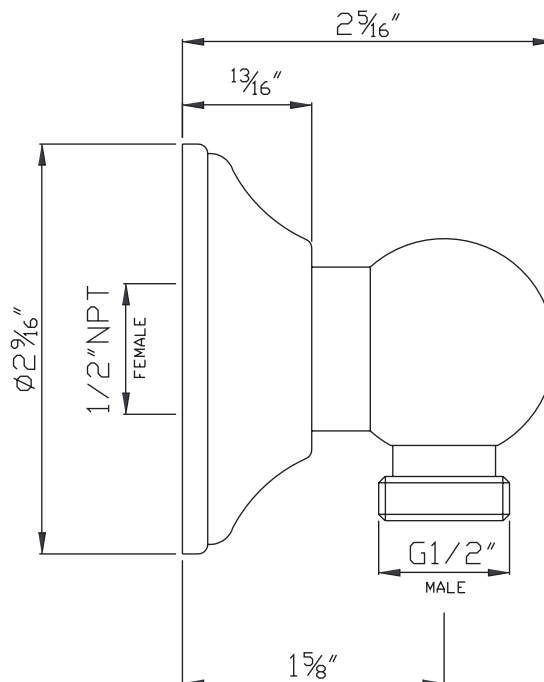

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

ONTARIO
houseofrohl.ca/support
1-800-287-5354

SPECIFICATIONS

DESCRIPTION

- For use with handshower (sold separately)


WARRANTY

- Most products or parts carry "Limited Warranties" against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.



79" Metal Shower Hose

MODEL: 16295/79

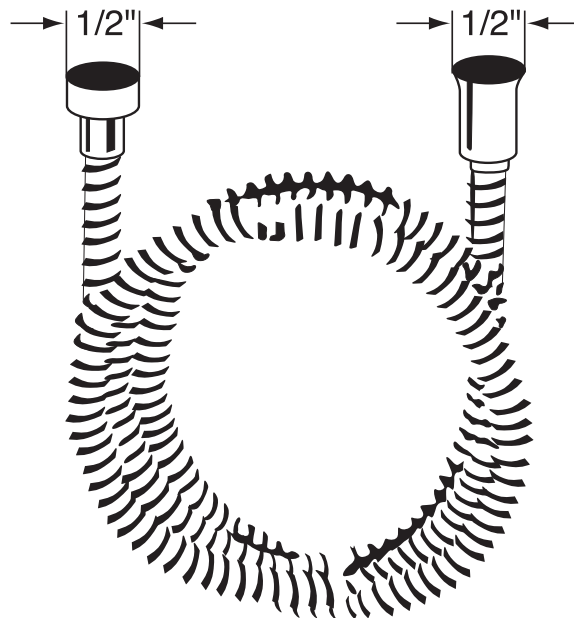

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

ONTARIO
houseofrohl.ca/support
1-800-287-5354

ID Infinity Drain



S-LTIF 65 Low Profile Site Sizable Series


- S-LTIF 6536 - 36" Complete Kit
- S-LTIF 6548 - 48" Complete Kit
- S-LTIF 6560 - 60" Complete Kit
- S-LTIF 6572 - 72" Complete Kit
- S-LTIF 6596 - 96" Complete Kit

Features

- 12 gauge, 304L stainless steel Tile Insert Frame
- Modify length and outlet location on site
- Indoor or outdoor use
- Low profile 1" Height
- NOT INTENDED for installation across a barrier-free threshold
- Compatible with: PVC Liner, Rubber Liner (Chloraloy®), Hot Mop, Lead Pan, Copper Pan, or Fiberglass
- Flow rate - 9 gpm per outlet
 - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
 - Additional outlets can be added and combined into a larger waste line to increase flow rates

Installation

S Site Sizable PVC Channel

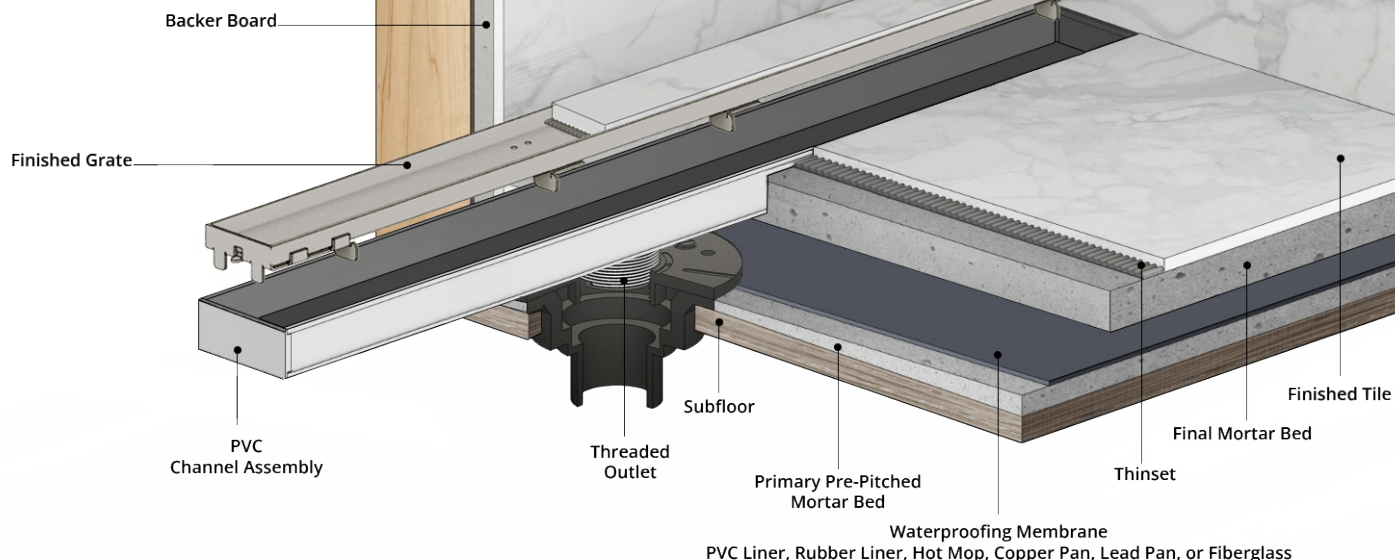

Care & Maintenance

S-LTIF 65 stainless steel linear drain top grates are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite® may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub® with Bleach, or Steel Brite®. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinitydrain.com




NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

S-LTIF 6536


S-LTIF 6548

S-LTIF 6560

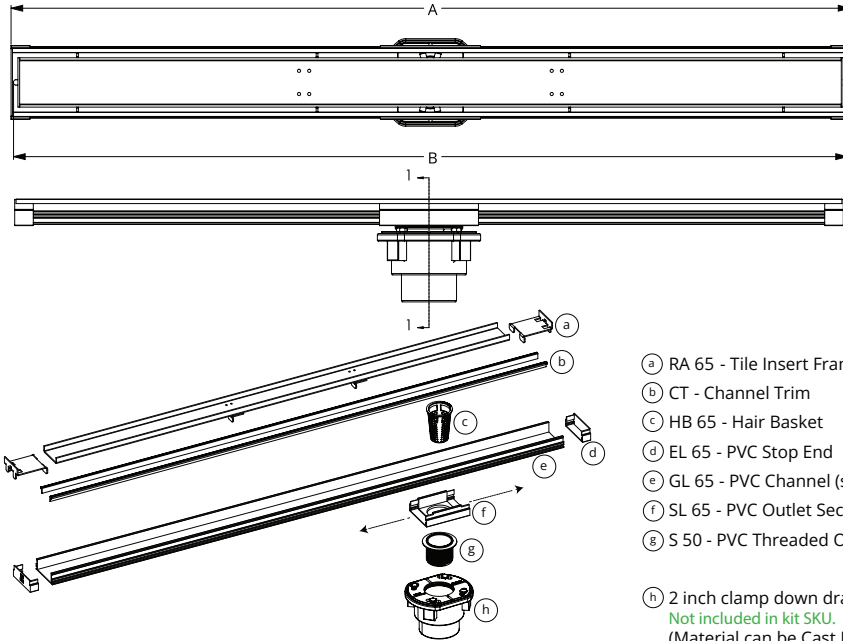

- a RA 65 - Tile Insert Frame Assembly
- b CT - Channel Trim
- c HB 65 - Hair Basket
- d EL 65 - PVC Stop End
- e GL 65 - PVC Channel (ships as one piece)
- f SL 65 - PVC Outlet Section
- g S 50 - PVC Threaded Outlet

- h 2 inch clamp down drain assembly
Not included in kit SKU.
(Material can be Cast Iron, ABS, or PVC)

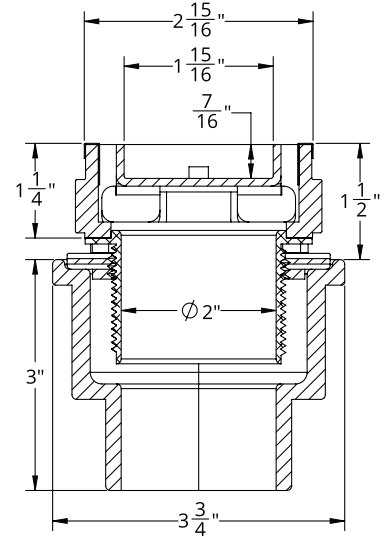

SECTION A-A

Model Number	Complete Kit Contents	A Maximum Overall Length	B Maximum Grate Length
S-LTIF 6536	1 - RA 6536 Tile Insert Frame 1 - GL 6536 PVC Channel 1 - CS 6536 Channel Spacer 2 - EL 65 PVC Stop Ends 1 - SL 65 PVC Outlet Section 1 - S 50 PVC Threaded Outlet 2 - CT 36 Channel Trims 1 - ZSIKA M1 Sealant 1 - HMK-65-A: 1 - HB 65 Hair Basket 1 - AKEY Lift Out Key	36"	35 7/8"
S-LTIF 6548	1 - RA 6548 Tile Insert Frame 1 - GL 6548 PVC Channel 1 - CS 6548 Channel Spacer 2 - EL 65 PVC Stop Ends 1 - SL 65 PVC Outlet Section 1 - S 50 PVC Threaded Outlet 2 - CT 48 Channel Trims 1 - ZSIKA M1 Sealant 1 - HMK-65-A: 1 - HB 65 Hair Basket 1 - AKEY Lift Out Key	48"	47 7/8"
S-LTIF 6560	1 - RA 6560 Tile Insert Frame 1 - GL 6560 PVC Channel 1 - CS 6560 Channel Spacer 2 - EL 65 PVC Stop End 1 - SL 65 PVC Outlet Section 1 - S 50 PVC Threaded Outlet 2 - CT 60 Channel Trims 1 - ZSIKA M1 Sealant 1 - HMK-65-A: 1 - HB 65 Hair Basket 1 - AKEY Lift Out Key	60"	59 7/8"

Finishes

☐ Satin Stainless (SS)
 ☐ Polished Stainless (PS)
 ☐ Oil Rubbed Bronze (ORB)
 ☐ Satin Bronze (SB)
 ☐ Matte Black (BK)

Infinity Drain
 145 Dixon Avenue
 Amityville, NY 11701
 Phone: 516.767.6786
 Fax: 516.740.3066
 www.Infinitydrain.com






NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

S-LTIF 6572

S-LTIF 6596

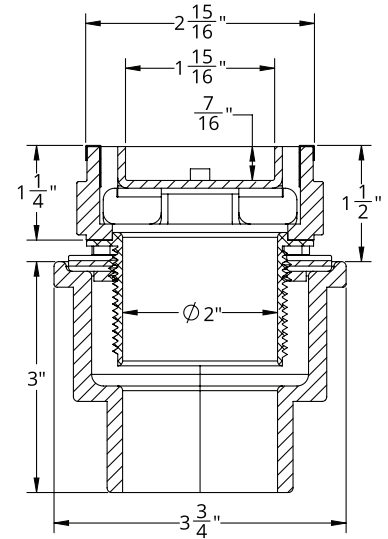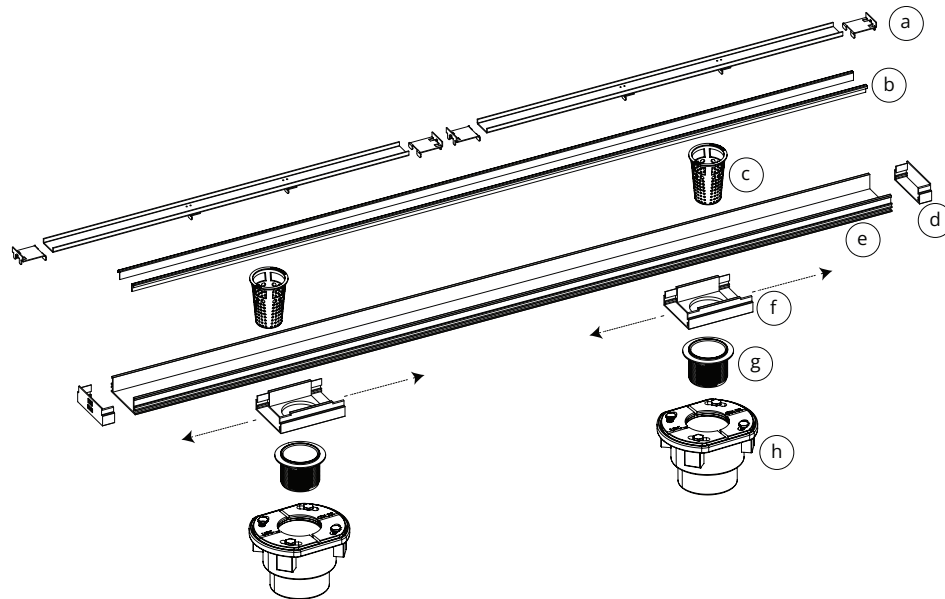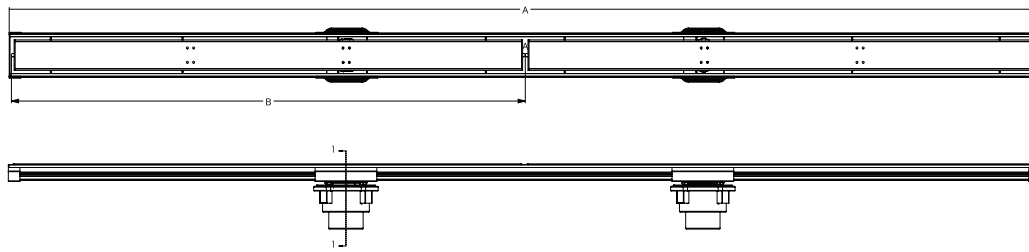

SECTION A-A

- (a) RA 65 - Tile Insert Frame Assembly
- (b) CT - Channel Trim
- (c) HB 65 - Hair Basket
- (d) EL 65 - PVC Stop End
- (e) GL 65 - PVC Channel (ships as one piece)
- (f) SL 65 - PVC Outlet Section
- (g) S 50 - PVC Threaded Outlet

- (h) 2 inch clamp down drain assembly
Not included in kit SKU.
(Material can be Cast Iron, ABS, or PVC)

Model Number	Complete Kit Contents	A Maximum Overall Length	B Maximum Grate Length
S-LTIF 6572	2 - RA 6536 Tile Insert Frame 1 - GL 6572 PVC Channel 1 - CS 6572 PVC Channel 2 - EL 65 PVC Stop Ends 2 - SL 65 PVC Outlet Sections 2 - S 50 PVC Threaded Outlet	72"	35 7/8" (x 2)
S-LTIF 6596	2 - RA 6548 Tile Insert Frame 1 - GL 6596 PVC Channel 1 - CS 6596 PVC Channel 2 - EL 65 PVC Stop End 2 - SL 65 PVC Outlet Sections 2 - S 50 PVC Threaded Outlets	96"	47 7/8" (x 2)

Finishes

☐ Satin Stainless (SS)
 ☐ Polished Stainless (PS)
 ☐ Oil Rubbed Bronze (ORB)
 ☐ Satin Bronze (SB)
 ☐ Matte Black (BK)

Infinity Drain
 145 Dixon Avenue
 Amityville, NY 11701
 Phone: 516.767.6786
 Fax: 516.740.3066
 www.Infinitydrain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

SPECIFICATIONS

DESCRIPTION

- Single-function anti-calcium handshower at 1.8 GPM/6.7 LPM at 60 PSI
- 3/4" male NPT inlet
- No additional rough-in valve required to install

FLOW

- 9 GPM/34 LPM at 60 PSI (CEC compliant)
- Hand spray flow rate 1.8gpm/6.6L/min @60psi

STANDARDS

- ASME A112.18.1/CSA B125.1

WARRANTY


- Most products or parts carry “Limited Warranties” against manufacturing defects. For US customers please visit houseofrohl.com/support and for Canadian customers please visit houseofrohl.ca/support for complete product and finish warranty.



Palladian®

4-Hole Deck Mount Tub Filler

MODEL: A1904

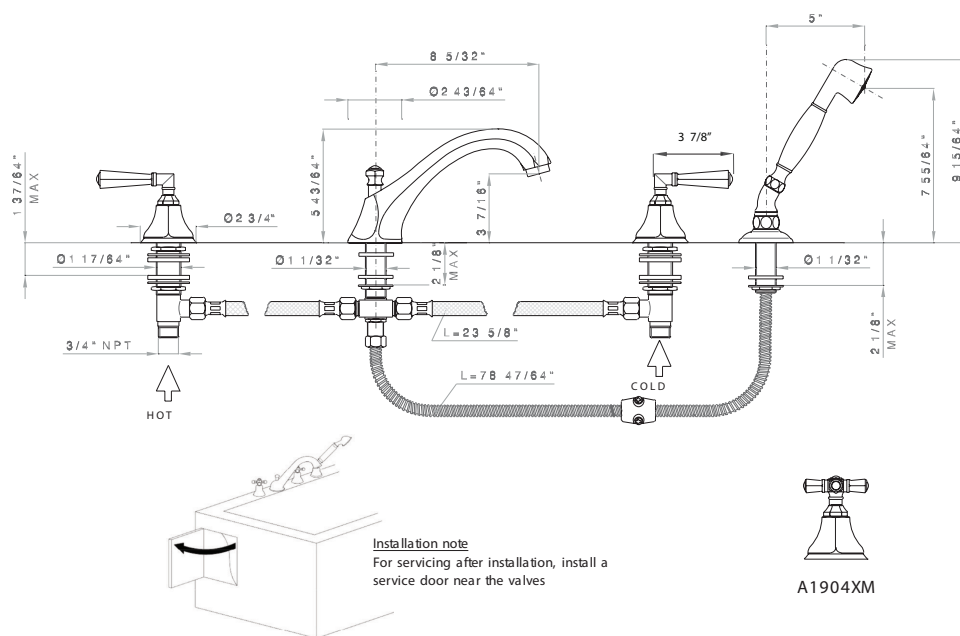

For warranty or additional information, contact:

U.S.A.
houseofrohl.com/support
1-800-777-9762

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

ONTARIO
houseofrohl.ca/support
1-800-287-5354

ESSENCIA OVAL 7236

72" x 36" x 25"

Essencia evokes essence—the elemental aspects of the inner being.



PRODUCT NO.

MODEL	TMU	TUB
	BESSOD00T- 01	BESSOD00N-XX
THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system		\$
Jets		50
1 heated backrest & headrest		Included
MiaPlus® Control*		Included
BU-Touch Control Application BUTOUCH NEW		\$
Geysair®		Included
AromaCloud® BAROMAC		\$
Illuzio Chromatherapy BCHRO6		\$
TUB Soaker		\$
AromaCloud® BAROMAC		\$
Illuzio Chromatherapy BCHRO6		\$
WarmTouchShell® BWTS		\$
DOT control		Included with therapy

FEATURES

Installation type		Drop-In	
No. of bathers		Inverted V	1
US gallons	61	Armrests	2
Imp. gallons	51	Grab bars (color match)	2
Raised seats	1	Footrest	Included
WASTE & OVERFLOW 16" x 35" BOVER16I-XX			
White 01, Biscuit 02, Chrome 07, Brushed Nickel 09, Polished Nickel 10, Oil-rubbed Bronze 11		Installed & Included	
STANDARD COLOR			
 		Included	
White 01 Biscuit 02			

OPTIONS (UPCHARGE APPLICABLE)

FINISH

UltraVelour Matte Finish (White only) BVEL \$

CLEAR ACRYLIC GRAB BARS BGBG10-XX

With Chrome 07 or Brushed Nickel 09 inserts \$

IF REQUIRED BY CONSTRUCTION CODE

16" x 35" Cable driven brass waste & overflow kit BOVERBR-XX \$




* For TMU, control and faucets cannot be installed on the deck of the bath.


TOTAL PRICE \$



ESSENCIA OVAL 7236

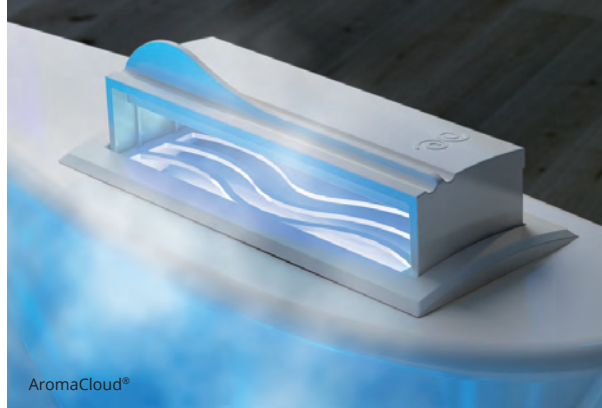


AromaCloud®

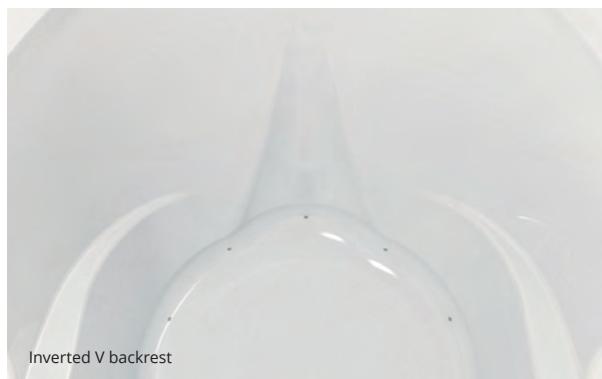

Inverted V backrest

INSTALLATION

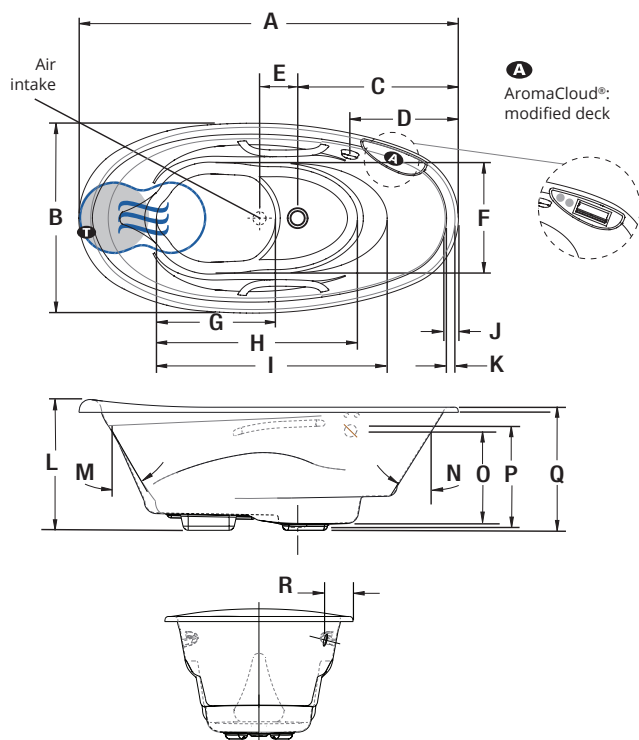

LETTER	DESCRIPTION	MEASURE
A	Total length	72"
B	Total width	36"
C	Outside edge to center drain	30 1/2"
D	Outside edge to overflow	20 1/2"
E	Center drain to center air intake	5"
F	Bathing well width	21"
G	Raised seat length	22 5/8"
H	Bottom bathing well length	38"
I	Bathing well length	45 1/4"
J	Deck width (top)	2 5/8"
K	Deck width (raised deck)	1 1/2"
L	Total height to headrest	24 7/8"
M	Slope of backrest	30°
N	Slope on drain side	32°
O	Maximum water level	16 5/8"
P	Height from drain to center of overflow	18 3/8"
Q	Height from bottom of bath to top deck	23 1/2"
R	Minimum faucet dimension	6 3/8"

- AromaCloud® position
- Indicates heated backrest (TMU)
- Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of TUB or greater.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	- The GEYSAIR must always be accessible and connected to the hot water supply (provide access). - Faucets cannot be installed on the deck of the bath. - The turbine must be remotely installed. - TMU: Control must be wall-mounted. - TUB: Dot controls are located on the side of the AromaCloud®.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Cutting template	# 90000056
Approx. shipping weight	146 lbs
Turbine power	550 W
Air heater	600 W
WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.



ECB-16-SB

- Jeeves Model E Curved 16" Wide 12 Bar Hardwired Towel Warmer in Oil Rubbed Bronze - ECO-16
- Made to order
- ~~Oil Rubbed Bronze Finish~~ SATIN BRONZE
- Number of Bars: 12
- Bar Shape: Round
- Bar Type: Curved
- Width (in): 15.75
- Height (in): 31
- Depth (in) : 6.5
- Volts: 120
- Certification: cULus
- External Temp Range (F): 120 - 150
- Mounting Type: Wall Mount
- Installation Type: Hardwire
- Integrated Switch: No
- 304 Stainless Steel
- Image Shown is in Matte Black Finish
- Country of Origin: South Africa
- Full manufacturer's warranty included

<https://www.supremekitchenbath.com/amba-jeeves-model-e-curved-16-wide-12-bar-hardwired-towel-warmer-in-oil-rubbed-bronze-eco-16/#:~:text=Amba%20Jeeves%20Model%20E%20Curved%2016%22%20Wide,Warmer%20in%20Oil%20Rubbed%20Bronze%20%2D%20ECO%2D16.>

JEEVES COLLECTION

INSTALLATION GUIDE



- These units should be installed by a certified electrician in accordance with the National Electrical Code (NEC) and the Canadian Electrical Code (CEC).
- The unit requires a 120 volt, 60Hz power source and should be installed on a GFCI protected circuit.
- An on/off switch or other hardwired control mechanism must be used to operate unit - if wired directly unit will remain on indefinitely which is not recommended.
- Follow installation instructions to ensure unit is securely fixed to wall.
- Unit **MUST NOT** be installed upside down: The electrical supply should be located at the bottom of the unit for correct installation.
- Unit is designed for hanging, drying and warming towels or other articles of clothing: Under no circumstances should anybody climb on or hang on unit.
- Unit is intended for indoor use, and whilst they can be used outdoors in suitable conditions, the warranty would be voided.
- Do not place units inside a shower, sauna, steam room, or wherever unit would be exposed to water, unless you have also purchased and installed our UL Certified wet-rated installation kit, sold separately (SKU: AJ-WRK).
- Surface temperature can increase depending on the ambient temperature in the room and the number of towels applied to the unit.
- The fasteners provided with the installation kit are for convenience only and are not suitable for all installations.
- To ensure the Heated Towel Rail is mounted securely, fasteners should be secured in studs or structural members placed behind the rails.
- It is the ultimate responsibility of the installer to ensure proper mounting hardware is employed in attaching the unit to the wall.
- After installation, connect the electric power.
- Allow 30-45 minutes to heat up.
- This rack is designed and safe to run continuously with a simple on/off switch for control. However, it can also be wired to a timer for scheduled control.
- Towels which contain soap or detergent residue may appear to have scorch marks; this is simply discoloration of the residue. These discoloration marks will disappear after a couple wash cycles.
- The unit is constructed from extremely durable 304 stainless steel. To maintain a good appearance, follow these simple instructions:
 - > For routine cleaning, simply switch off the unit, allow to cool to room temperature, wipe with a damp cloth and buff with a soft, dry cloth.
 - > Under no circumstances should abrasive cleaners be used to clean the unit.
 - > View our cleaning and maintenance guidelines found on our website for further information.

WARRANTY


A ten-year limited warranty on the unit and two years on the element will apply with proof of purchase if all Terms and Conditions of Sale are met, and Installation Instructions are adhered to.

MOUNTING LEG ASSEMBLY


Loosen the set screw D to release tapered bushing F from Leg Extension B



INCLUDED COMPONENTS

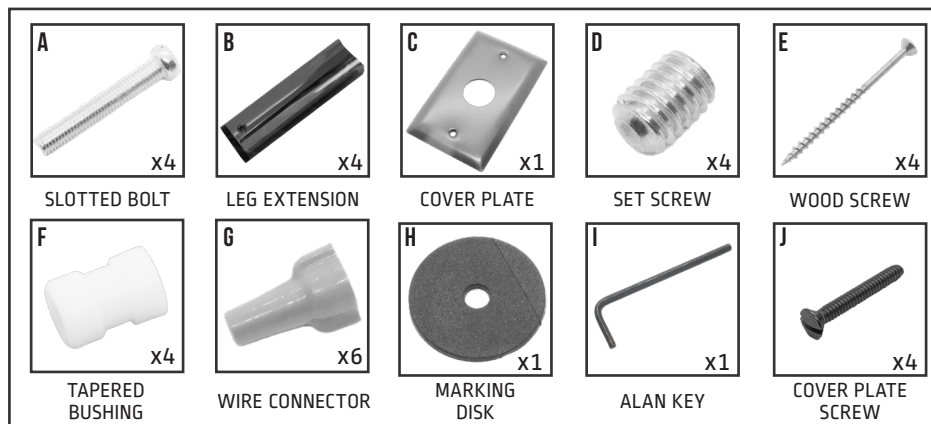

TOOLS REQUIRED

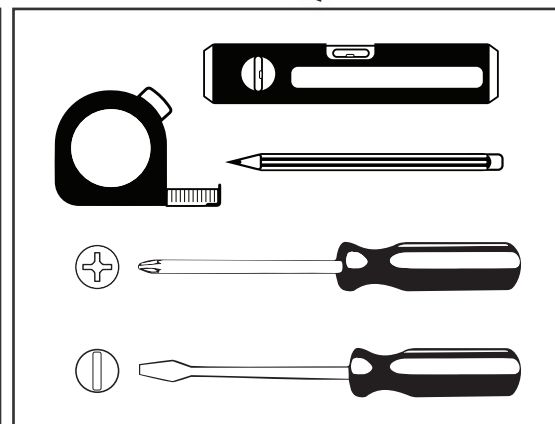

FOR DIMENSIONS AND SPECS, VISIT MODEL PAGE ON OUR WEBSITE FOR TECHNICAL DRAWING

www.ambaproducts.com | customerservice@ambaproducts.com | (404) 350-9738

JEEVES COLLECTION

INSTALLATION GUIDE

FOR DIMENSIONS AND SPECS, VISIT MODEL PAGE ON OUR WEBSITE FOR TECHNICAL DRAWING




FIG 1




FIG 2

STEP 1

Insert the slotted bolt [part A] through the leg extension [part B], as shown in [fig. 1], for all 4 leg extensions. Fasten the bolt into the threaded nut welded onto the back of the unit, using a flat head screw driver, as shown in [fig. 2]. *Note - make sure the set screw [part D] on the leg extension is facing down, do not tighten yet.

Decide where to install unit and the location of the single gang junction box. This can be done by either placing the assembled rack against the wall or taking approximate dimensions from the drawing supplied.




FIG 3

STEP 2

Install single gang junction box in the desired position. Secure supplied cover plate onto box. Place unit against wall with wire cover tube inserted in cover plate. To achieve this, the cord needs to be fed through the slot at the end of the tube. Make sure the unit is mounted squarely and levelled. Use a pencil to lightly mark the position of all four leg extensions on the wall [fig. 3].




FIG 4




FIG 5

STEP 3

Remove unit and center the marking disk [part H] in the circles marked on the wall in Step 2. Mark the center of the hole using a pencil. Repeat for all legs. Place the tapered bushing [part F] onto the center of the circles marked in [fig. 4], insert supplied wood screw through center of the tapered bushing and fasten to wall as in [Fig 5]. If rack is installed on a tiled surface use a toggle bolt anchor. If mounting to drywall without wood backing, drywall anchors or toggle bolt anchors are also recommended.




FIG 6




FIG 7

STEP 4

Slide cover plate [part C] over tube with electrical wires [fig. 6] and make the electrical connections as outlined in the diagram below [fig. 8], using the provided wire connectors [part g]

Slide unit with leg extensions onto the 4 tapered bushings and using the supplied allen key [part I], tighten the set screw [part D] on all four legs to secure the unit to wall.

After properly securing all wire connections, push wires into box and secure cover plate to the junction box with provided cover plate screws

WIRING DIAGRAM

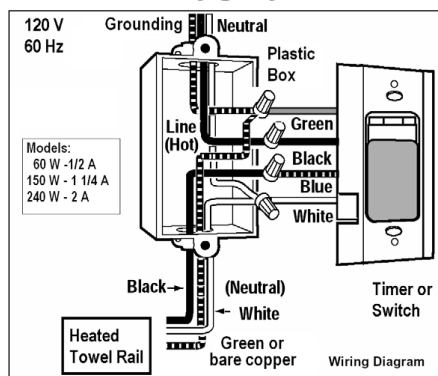


FIG 8


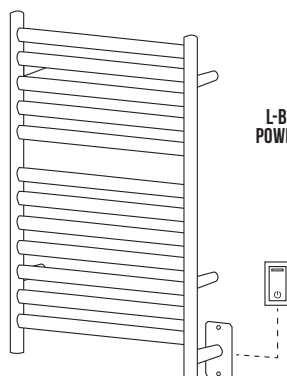


FIG 9

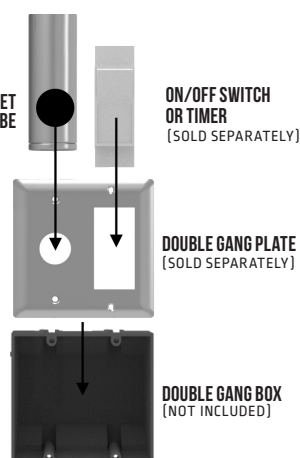

Jeeves Collection models can be installed with an optional Double Gang Plate [fig. 10], replacing the included Single Gang Plate and allowing a switch or timer to be integrated directly adjacent to the rack itself.




FIG 10

The towel rack must be connected to an on/off switch or a timer, [see fig. 9]. Make sure one is provided for installation. The heated towel rack will not perform if a timer with cycles shorter than 30min is used.



Corbelle® | K-4144

Elongated toilet bowl with skirted trapway

Features

- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Revolution 360® flushing technology generates a forceful swirling motion to keep the bowl clean longer
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- CleanCoat™ surface treatment inhibits the growth of water scale and mineral stains for improved ease of cleaning
- Combines with the K-4143, K-4143-RA, or K-5711 tank to create a complete K-3814, K-3814-RA, or K-5709 Corbelle toilet
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 17:12 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.19.2/CSA B45.1

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Revolution 360
Bowl Shape:	Elongated
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted

Recommended Products/Accessories

K-23726 Drain treatment
K-4143 Toilet tank, 1.28 gpf

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.
This product is a component and not intended to be a standalone installation.

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Seat sold separately

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.



Corbelle® | K-4143

Toilet tank, 1.28 gpf

Features

- 1.28 gpf (4.8 lpf)
- Combines with the K-4144 bowl to create a complete K-3814 Corbelle toilet
- Alternative options available: Corbelle toilet tank with ContinuousClean - K-5711
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Left-hand trip lever



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ASME A112.19.2/CSA B45.1
EPA WaterSense®

Technical Information

Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)

Recommended Products/Accessories

K-23726 Drain treatment

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.

This product is a component and not intended to be a standalone installation.

Installation

- Supply line sold separately
 - Supply line sold separately
-

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.





Cachet® | K-4636-RL

ReadyLatch® Quiet-Close™ elongated toilet seat

Features

- Grip-Tight installation hardware makes it easy to fasten the seat – everything is done from above the bowl
- ReadyLatch® hinge provides a positive lock/unlock latch to securely hold seat in position, yet seat easily removes for cleaning or adjusting fit
- Quiet-Close™ elongated lid and seat prevents slamming
- Grip-Tight bumpers hold seat firmly in place
- Contoured seat for user comfort
- Color-matched plastic hinges
- Fits most elongated toilets



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:53 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

IAPMO/ANSI Z124.5

Technical Information

All product dimensions are nominal.

Seat Shape Type:	Elongated
Seat Front Type:	Closed-front
Seat-Mounting Holes:	5-1/2" (140 mm)

Material


- Plastic construction

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



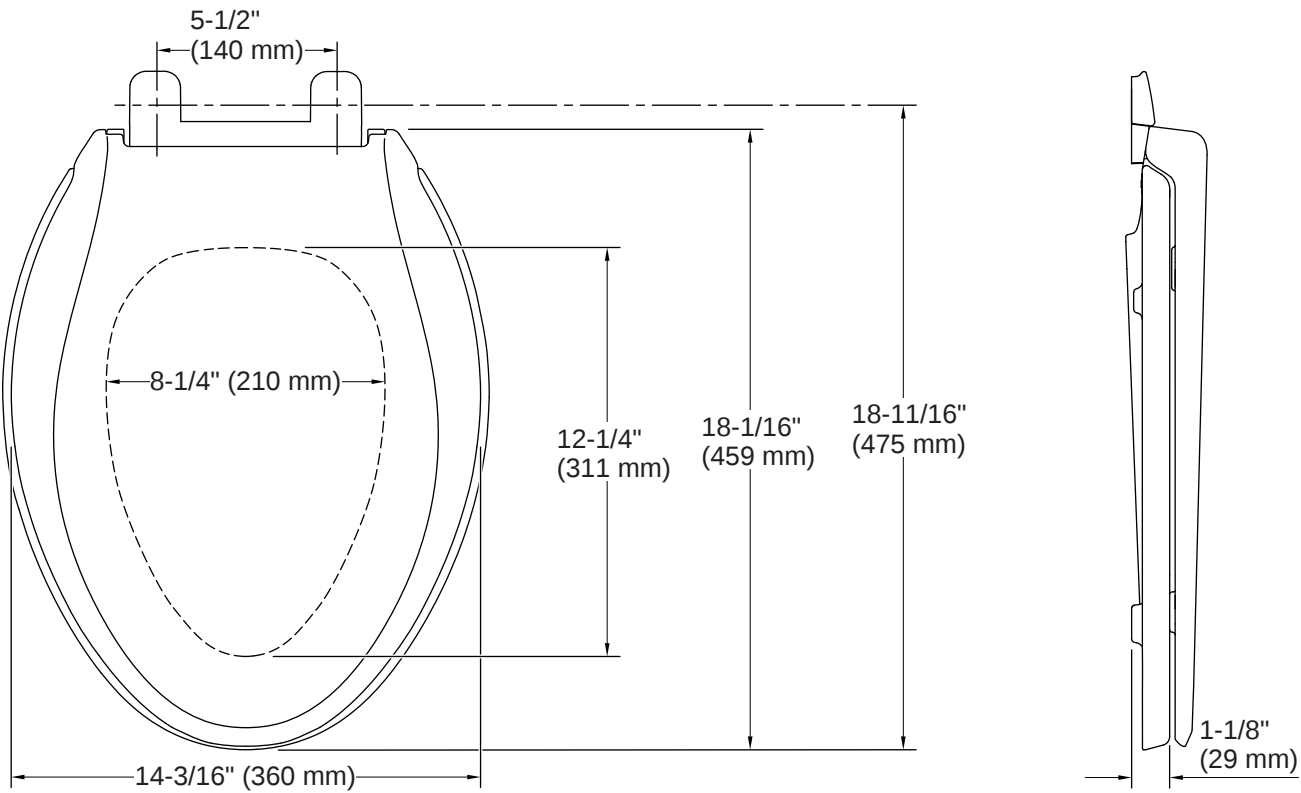

Installation Notes

Install this product according to the installation instructions.





Corbelle® | K-20120-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-3814 Corbelle toilet



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
G	Brushed Chrome
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium
BGP	Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:31 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



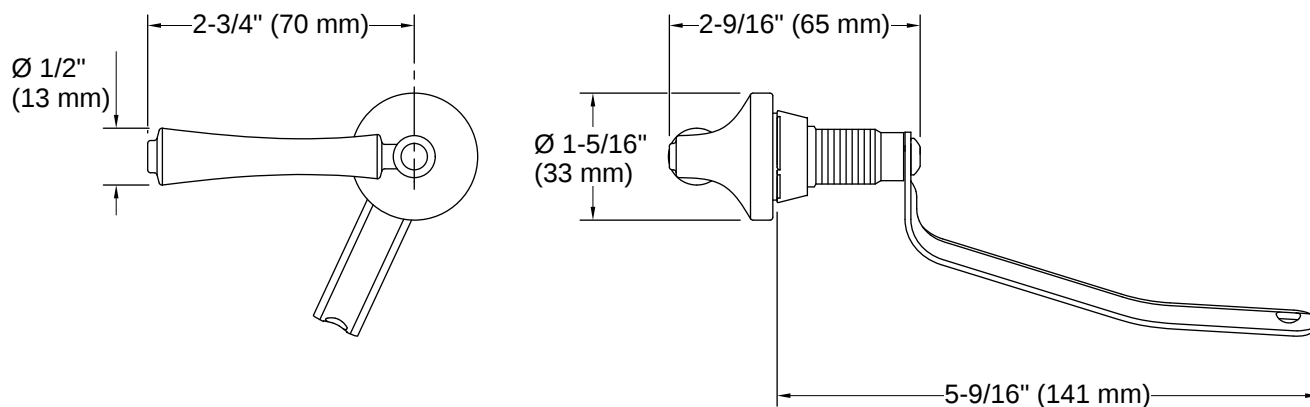

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)
 Kohler Co. reserves the right to make revisions without notice to product specifications.
 For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
 3-27-2026 19:31 - US-CA



Baliza Widespread Lavatory Faucet Less Handles - Polished Nickel



Baliza Metal Lever Handle Kit - Polished Nickel



Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White



Baliza Tempassure Thermostatic Shower Only Trim Polished Nickel




Corbelle Two Piece Elongated Toilet With Skirted Trapway,
1.28 GPF - White



Cachet Readylatch Quiet Close Elongated Toilet Seat -
White





Corbelle Left Hand Trip Lever - Vibrant Polished Nickel



Submitted Model No.: _____

Specific Features: _____

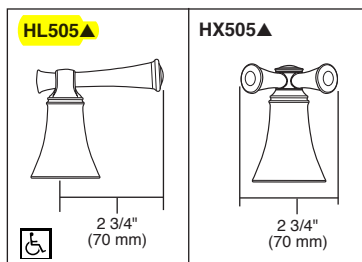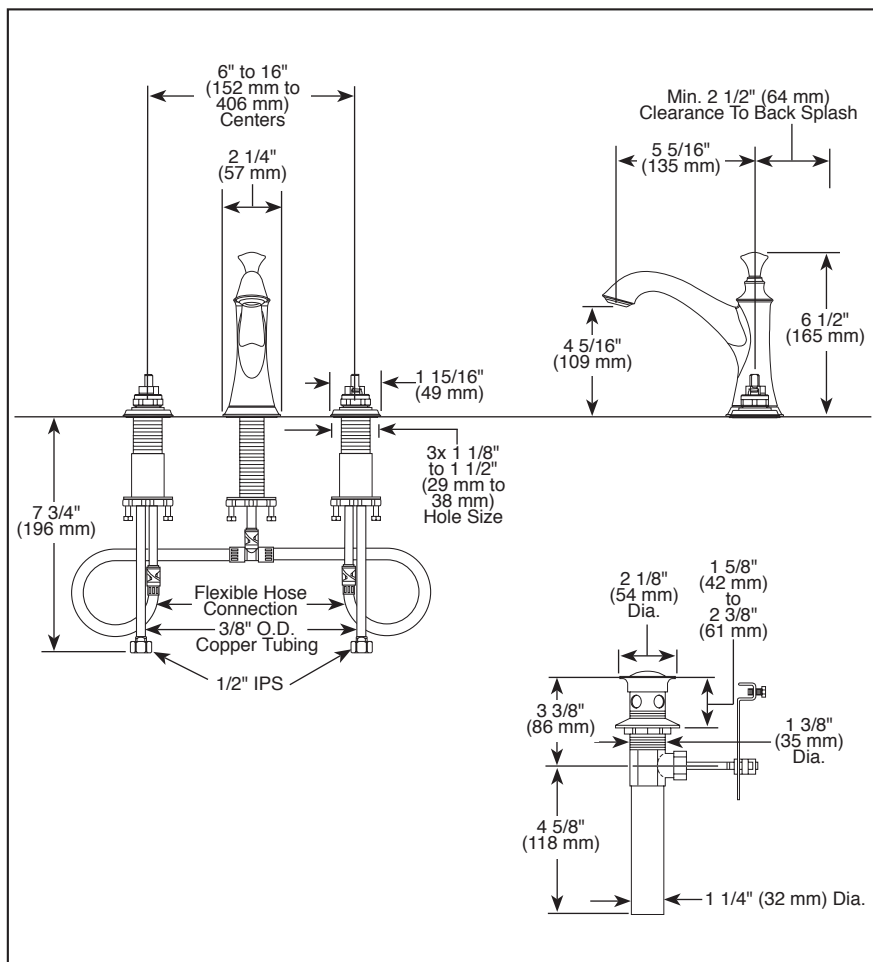

▲ Designate Proper Finish Suffix

BRIZO®

WIDESPREAD LAVATORY FAUCETS

- Baliza® Bath Collection
- Two Handle Widespread Deck Mount

STANDARD SPECIFICATIONS:

- Max. 1.50 gpm @ 60 psi, 5.70 L/min @ 414 kPa
- Max. (ECO models only) 1.20 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- Three hole mount
- LHP - Less Handle Program. See handle options below.
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation
- Metal drain with pop-up type fitting with plated flange and stopper
- Accommodates up to 3" deck thickness

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.



Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Features

- Rectangular basin
- Overflow drain
- No faucet holes; requires wall- or counter-mount faucet



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----------|--------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651

Technical Information

With Overflow:	Yes
Drain Hole Diameter:	1-3/4" (44 mm)
Basin Configuration:	Single Bowl
Basin Length:	17-5/8" (448 mm)
Basin Width:	13-1/8" (334 mm)
Basin Depth:	5-5/16" (135 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment
K-23725 Cast iron cleaner




Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

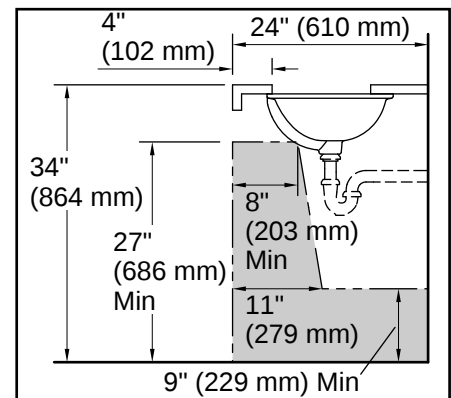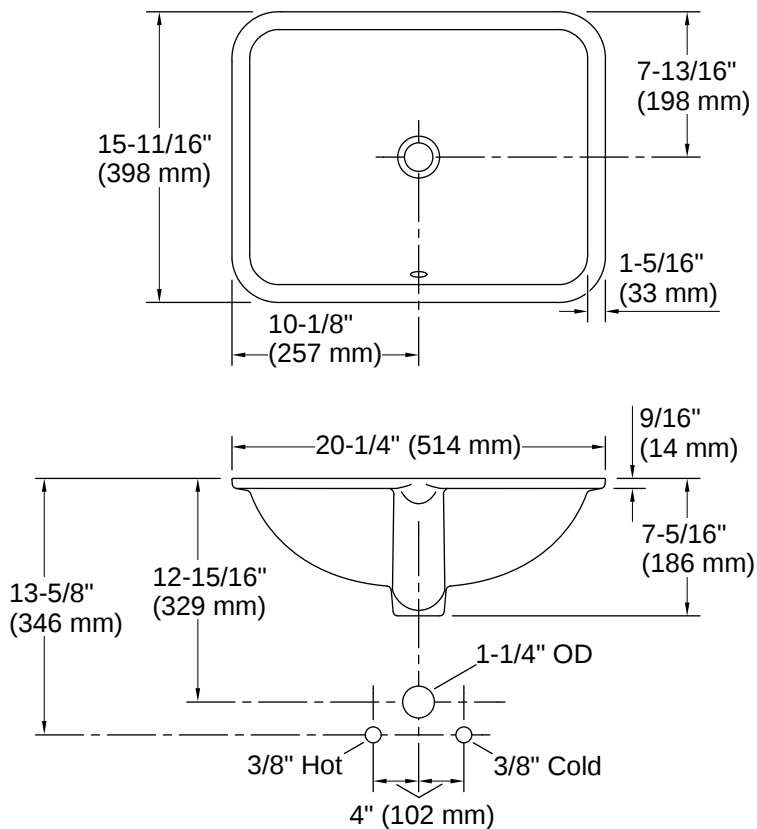
Recommended ADA Installation


Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.






For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-30-2026 21:0 - US-CA

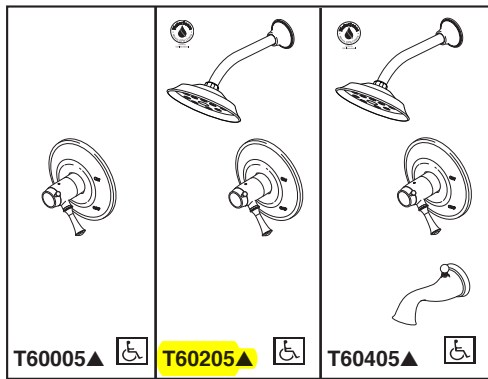

Submitted Model No.: _____

Specific Features: _____

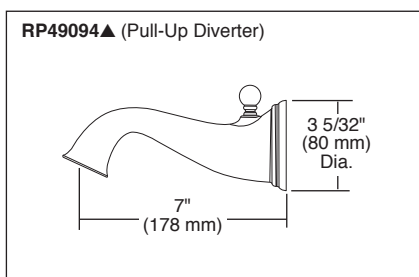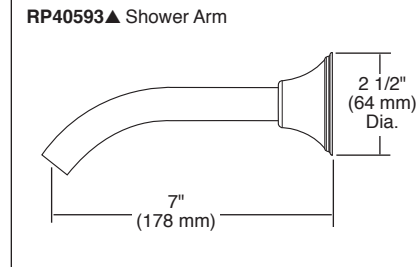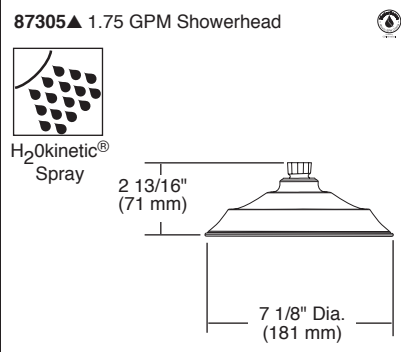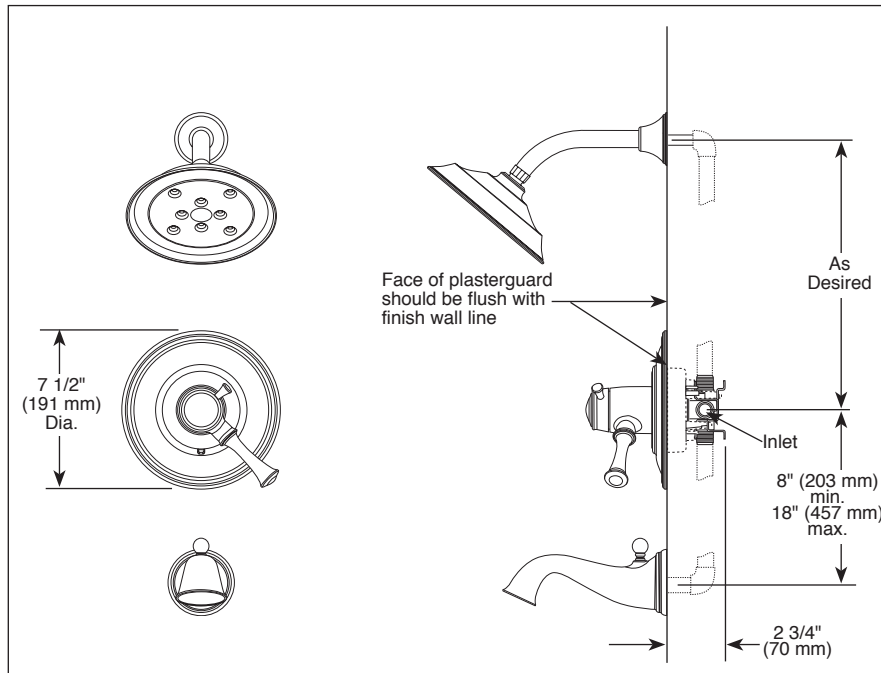

▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T60005 Rev. G

BRIZO®

TUB AND SHOWER FAUCET TRIM

- Baliza® Bath Collection
- TempAssure® Thermostatic
- Valve Only (T60005)
- **Shower Only (T60205)**
- Tub/Shower (T60405)

STANDARD SPECIFICATIONS:

- TempAssure® thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to $\pm 3.6^{\circ}\text{F}$.
- Must also order MultiChoice® Universal rough valve body (R60000 Series).
- Back-to-back installation capability.
- Lever volume control handle; temperature adjustment lever.
- Graphics indicate hot/cold temperature adjustment.
- Field adjustable to limit handle rotation into hot water zone.
- All parts replaceable from the front of the valve.
- Adjusts for up to 1" wall thickness.
- Single function H₂Okinetic Technology® showerhead; 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa.
- Tool for showerhead to showerarm assembly provided.
- Decorative, cast brass showerarm and tub spout.


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- Indicates compliance to ICC/ANSI A117.1- Valve control only
- EPA WaterSense®

Using R60000-UNBX:

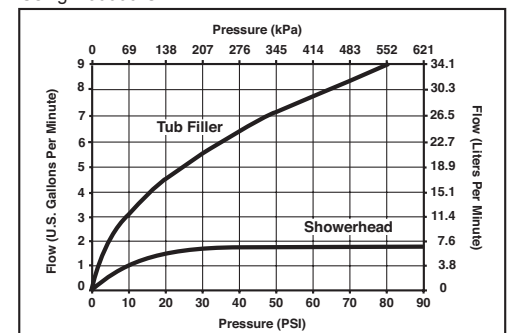


For additional flow rate information reference the Brizo price book.

Brizo Kitchen & Bath Company

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2017 Brizo Kitchen & Bath Company



BRIZO®

MULTICHOICE® UNIVERSAL ROUGH VALVE BODY


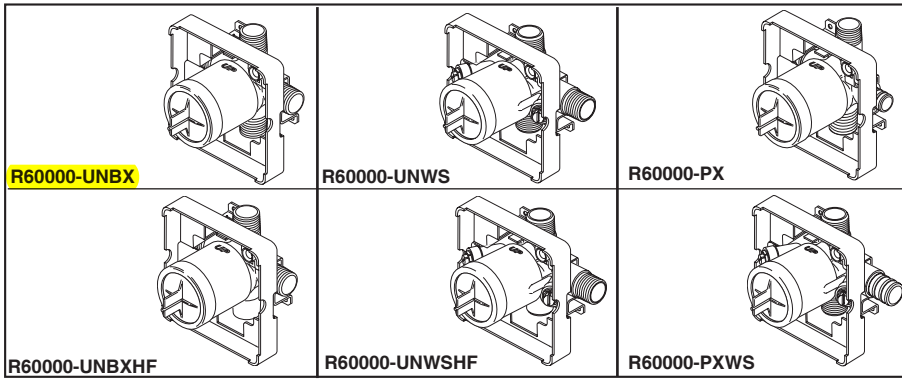


- **R60000-UNBX (Universal Single Box Model)**
- R60000-UNBXHF (High FlowShower Only)
- R60000-UNWS (Universal with Stops)
- R60000-UNWSHF (High Flow with Stops Shower Only)
- R60000-PX (Pex Crimp Inlets with UN Outlets)
- R60000-PXWS (Pex Crimp Inlets with Stops And UN Outlets)

R60000-UNBX

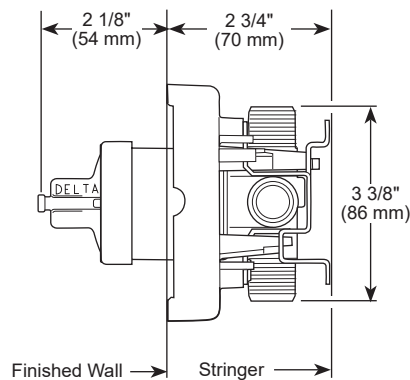

R60000-UNWS

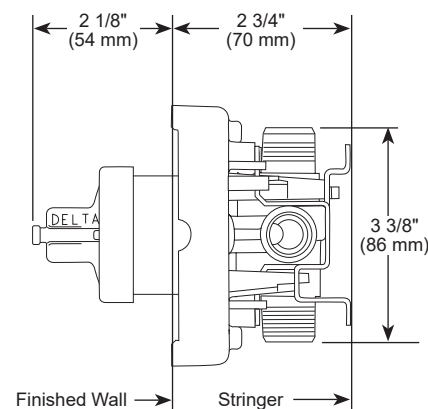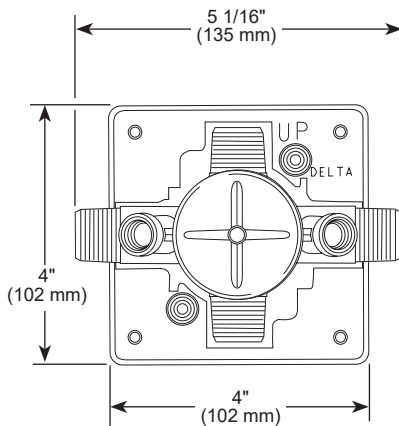

STANDARD SPECIFICATIONS:

- Forged brass body.
 - Back-to-Back installation capabilities.
 - Can be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap.
 - Square plasterguard allows for right angle cuts.
 - Thin wall mounting.
 - For use with MultiChoice® Universal single or dual function trim.
 - Cartridge ships with trim.
 - 1/2" outlets and connections.
- Note: No tub outlet in HF model.
- Note: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting).
- Note: Should use proper tooling with crimping pex fitting.
- Note: UN indicates Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat.

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Extension kits available

Visit our website at www.brizo.com for specification sheet for trim model to identify appropriate RP.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R60000 Rev. G

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company



Corbelle® | K-4144

Elongated toilet bowl with skirted trapway

Features

- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Revolution 360® flushing technology generates a forceful swirling motion to keep the bowl clean longer
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- CleanCoat™ surface treatment inhibits the growth of water scale and mineral stains for improved ease of cleaning
- Combines with the K-4143, K-4143-RA, or K-5711 tank to create a complete K-3814, K-3814-RA, or K-5709 Corbelle toilet
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 17:12 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.19.2/CSA B45.1

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Revolution 360
Bowl Shape:	Elongated
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted

Recommended Products/Accessories

K-23726 Drain treatment
K-4143 Toilet tank, 1.28 gpf

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.
This product is a component and not intended to be a standalone installation.

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Seat sold separately

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.



Corbelle® | K-4143

Toilet tank, 1.28 gpf

Features

- 1.28 gpf (4.8 lpf)
- Combines with the K-4144 bowl to create a complete K-3814 Corbelle toilet
- Alternative options available: Corbelle toilet tank with ContinuousClean - K-5711
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Left-hand trip lever



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ASME A112.19.2/CSA B45.1
EPA WaterSense®

Technical Information

Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)

Recommended Products/Accessories

K-23726 Drain treatment

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.
This product is a component and not intended to be a standalone installation.

Installation

- Supply line sold separately
- Supply line sold separately

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.





Cachet® | K-4636-RL

ReadyLatch® Quiet-Close™ elongated toilet seat

Features

- Grip-Tight installation hardware makes it easy to fasten the seat – everything is done from above the bowl
- ReadyLatch® hinge provides a positive lock/unlock latch to securely hold seat in position, yet seat easily removes for cleaning or adjusting fit
- Quiet-Close™ elongated lid and seat prevents slamming
- Grip-Tight bumpers hold seat firmly in place
- Contoured seat for user comfort
- Color-matched plastic hinges
- Fits most elongated toilets



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:53 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

IAPMO/ANSI Z124.5

Technical Information

All product dimensions are nominal.

Seat Shape Type:	Elongated
Seat Front Type:	Closed-front
Seat-Mounting Holes:	5-1/2" (140 mm)

Material


- Plastic construction

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



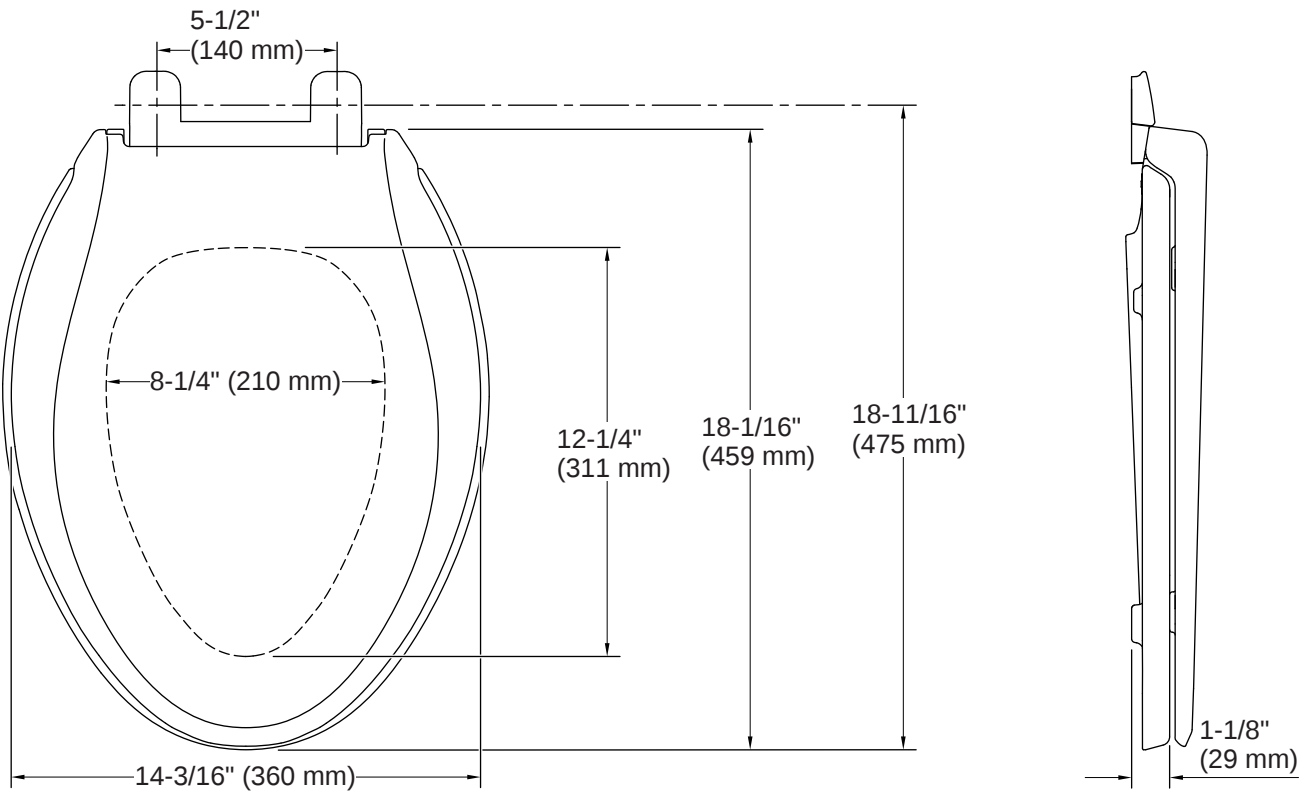

Installation Notes

Install this product according to the installation instructions.





Corbelle® | K-20120-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-3814 Corbelle toilet



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
G	Brushed Chrome
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium
BGP	Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:31 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



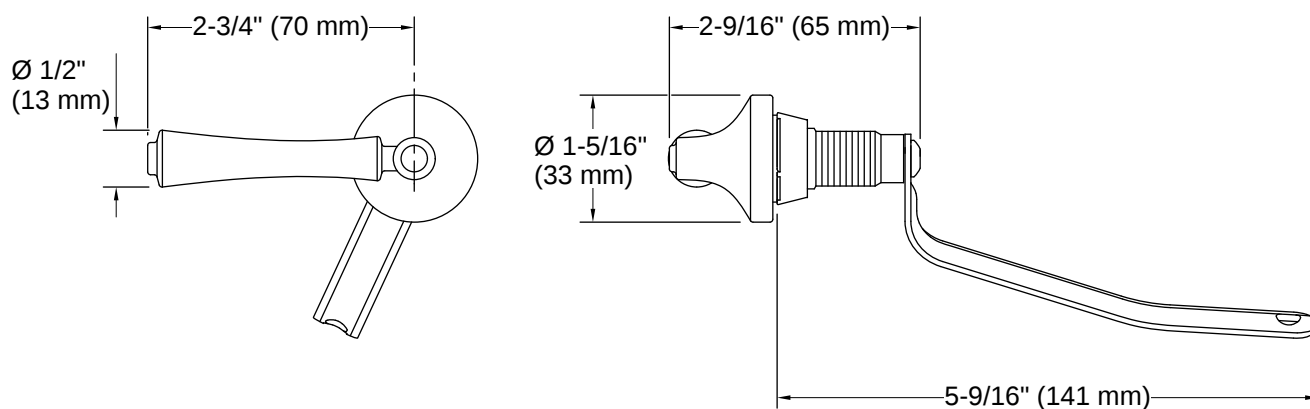

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)
 Kohler Co. reserves the right to make revisions without notice to product specifications.
 For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
 3-27-2026 19:31 - US-CA



Baliza Widespread Lavatory Faucet Less Handles - Polished Nickel



Baliza Metal Lever Handle Kit - Polished Nickel



Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White



Baliza Tempassure Thermostatic Shower Only Trim Polished Nickel




Corbelle Two Piece Elongated Toilet With Skirted Trapway,
1.28 GPF - White



Cachet Readylatch Quiet Close Elongated Toilet Seat -
White





Corbelle Left Hand Trip Lever - Vibrant Polished Nickel



Submitted Model No.: _____

Specific Features: _____

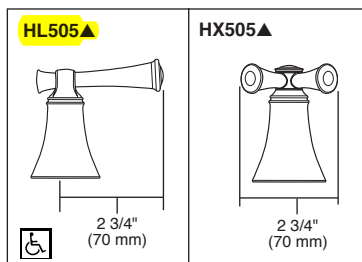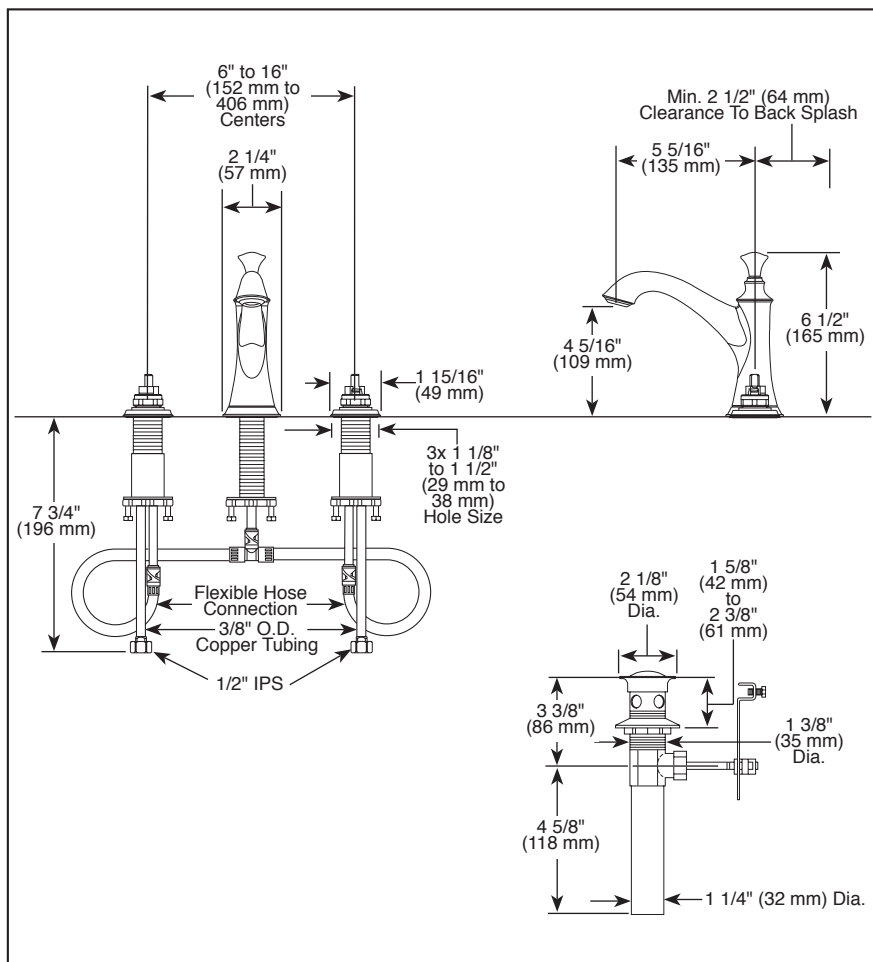

▲ Designate Proper Finish Suffix

BRIZO®

WIDESPREAD LAVATORY FAUCETS

- Baliza® Bath Collection
- Two Handle Widespread Deck Mount

STANDARD SPECIFICATIONS:

- Max. 1.50 gpm @ 60 psi, 5.70 L/min @ 414 kPa
- Max. (ECO models only) 1.20 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- Three hole mount
- LHP - Less Handle Program. See handle options below.
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation
- Metal drain with pop-up type fitting with plated flange and stopper
- Accommodates up to 3" deck thickness

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.



Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Features

- Rectangular basin
- Overflow drain
- No faucet holes; requires wall- or counter-mount faucet



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----------|--------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651

Technical Information

With Overflow:	Yes
Drain Hole Diameter:	1-3/4" (44 mm)
Basin Configuration:	Single Bowl
Basin Length:	17-5/8" (448 mm)
Basin Width:	13-1/8" (334 mm)
Basin Depth:	5-5/16" (135 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment
K-23725 Cast iron cleaner




Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

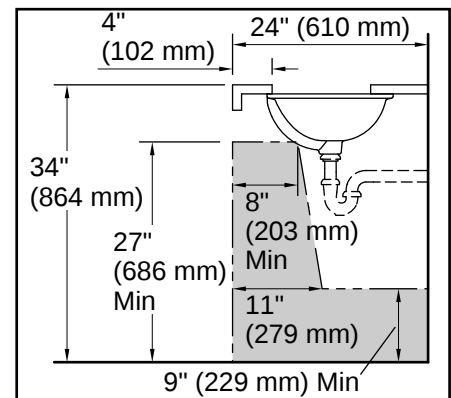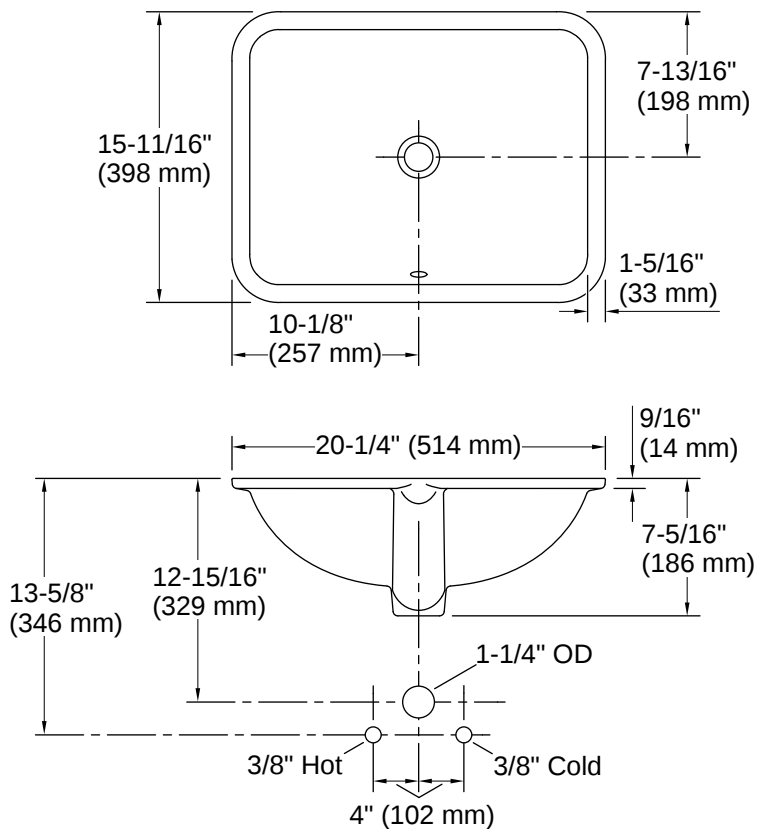
Recommended ADA Installation


Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.






For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-30-2026 21:0 - US-CA

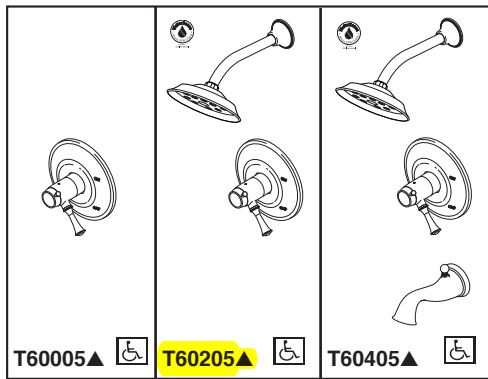

Submitted Model No.: _____

Specific Features: _____

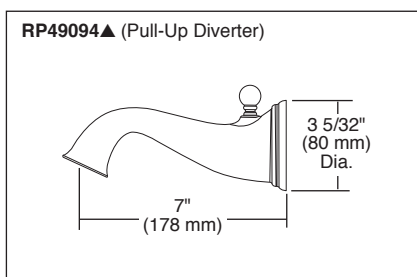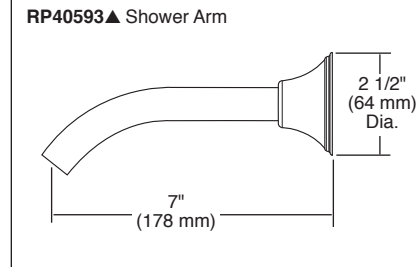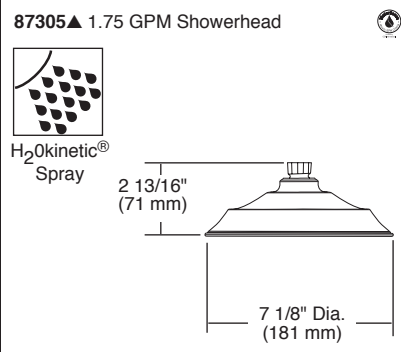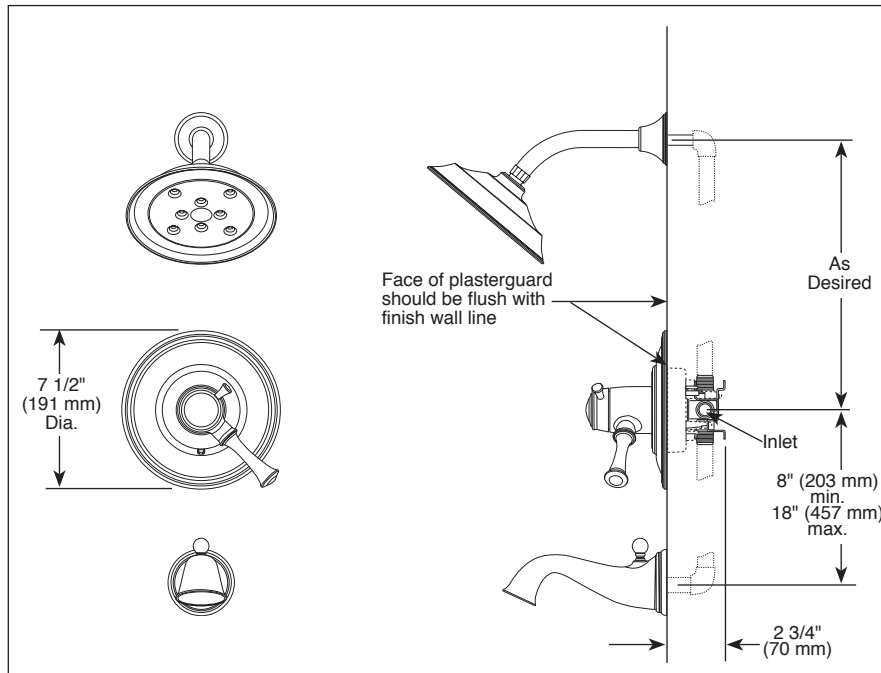

▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T60005 Rev. G

BRIZO®

TUB AND SHOWER FAUCET TRIM

- Baliza® Bath Collection
- TempAssure® Thermostatic
- Valve Only (T60005)
- Shower Only (T60205)
- Tub/Shower (T60405)

STANDARD SPECIFICATIONS:

- TempAssure® thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to $\pm 3.6^{\circ}\text{F}$.
- Must also order MultiChoice® Universal rough valve body (R60000 Series).
- Back-to-back installation capability.
- Lever volume control handle; temperature adjustment lever.
- Graphics indicate hot/cold temperature adjustment.
- Field adjustable to limit handle rotation into hot water zone.
- All parts replaceable from the front of the valve.
- Adjusts for up to 1" wall thickness.
- Single function H₂Okinetic Technology® showerhead; 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa.
- Tool for showerhead to showerarm assembly provided.
- Decorative, cast brass showerarm and tub spout.


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- Indicates compliance to ICC/ANSI A117.1- Valve control only
- EPA WaterSense®

Using R60000-UNBX:

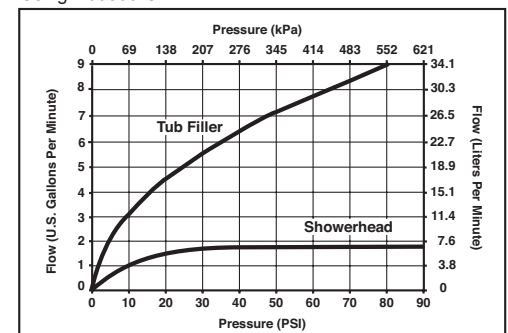


For additional flow rate information reference the Brizo price book.

Brizo Kitchen & Bath Company

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2017 Brizo Kitchen & Bath Company



BRIZO®

MULTICHOICE® UNIVERSAL ROUGH VALVE BODY


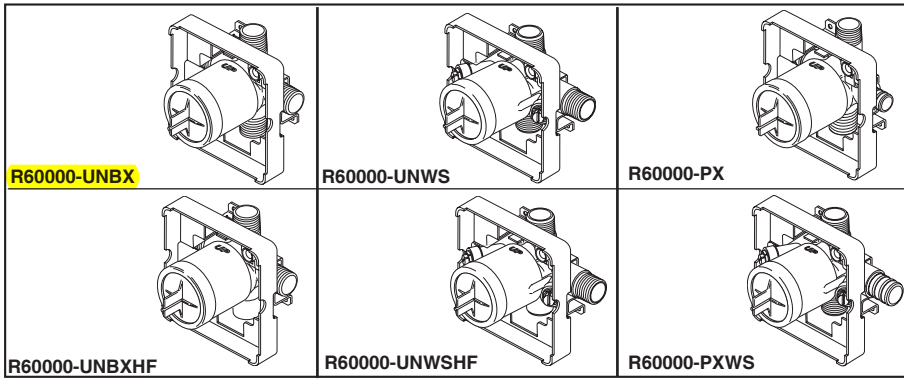


- **R60000-UNBX (Universal Single Box Model)**
- R60000-UNBXHF (High Flow Shower Only)
- R60000-UNWS (Universal with Stops)
- R60000-UNWSHF (High Flow with Stops Shower Only)
- R60000-PX (Pex Crimp Inlets with UN Outlets)
- R60000-PXWS (Pex Crimp Inlets with Stops And UN Outlets)

R60000-UNBX

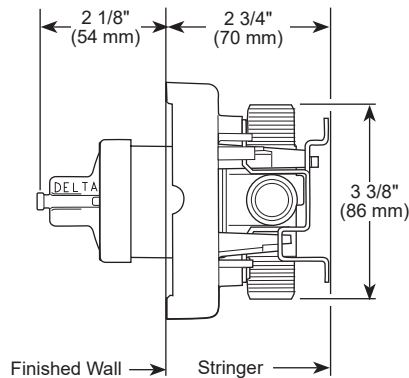

R60000-UNWS

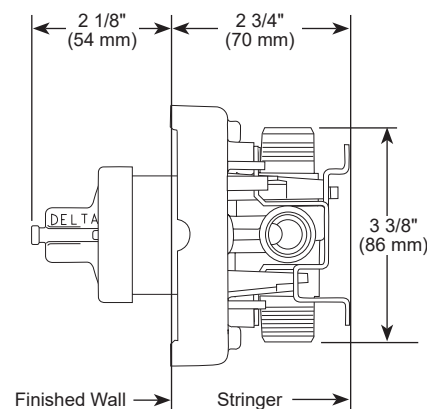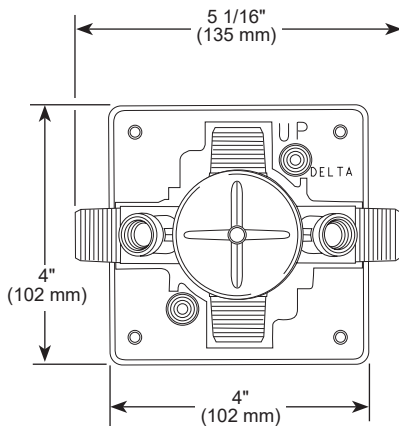

Extension kits available

Visit our website at www.brizo.com for specification sheet for trim model to identify appropriate RP.

STANDARD SPECIFICATIONS:

- Forged brass body.
 - Back-to-Back installation capabilities.
 - Can be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap.
 - Square plasterguard allows for right angle cuts.
 - Thin wall mounting.
 - For use with MultiChoice® Universal single or dual function trim.
 - Cartridge ships with trim.
 - 1/2" outlets and connections.
- Note: No tub outlet in HF model.
- Note: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting).
- Note: Should use proper tooling with crimping pex fitting.
- Note: UN indicates Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat.

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1



Corbelle® | K-4144

Elongated toilet bowl with skirted trapway

Features

- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Revolution 360® flushing technology generates a forceful swirling motion to keep the bowl clean longer
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- CleanCoat™ surface treatment inhibits the growth of water scale and mineral stains for improved ease of cleaning
- Combines with the K-4143, K-4143-RA, or K-5711 tank to create a complete K-3814, K-3814-RA, or K-5709 Corbelle toilet
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 17:12 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.19.2/CSA B45.1

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Revolution 360
Bowl Shape:	Elongated
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted

Recommended Products/Accessories

K-23726 Drain treatment
K-4143 Toilet tank, 1.28 gpf

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.
This product is a component and not intended to be a standalone installation.

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Seat sold separately

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.





Corbelle® | K-4143

Toilet tank, 1.28 gpf

Features

- 1.28 gpf (4.8 lpf)
- Combines with the K-4144 bowl to create a complete K-3814 Corbelle toilet
- Alternative options available: Corbelle toilet tank with ContinuousClean - K-5711
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Left-hand trip lever



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 16:0 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ASME A112.19.2/CSA B45.1
EPA WaterSense®

Technical Information

Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)

Recommended Products/Accessories

K-23726 Drain treatment

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.

This product is a component and not intended to be a standalone installation.

Installation

- Supply line sold separately
 - Supply line sold separately
-

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.





Cachet® | K-4636-RL

ReadyLatch® Quiet-Close™ elongated toilet seat

Features

- Grip-Tight installation hardware makes it easy to fasten the seat – everything is done from above the bowl
- ReadyLatch® hinge provides a positive lock/unlock latch to securely hold seat in position, yet seat easily removes for cleaning or adjusting fit
- Quiet-Close™ elongated lid and seat prevents slamming
- Grip-Tight bumpers hold seat firmly in place
- Contoured seat for user comfort
- Color-matched plastic hinges
- Fits most elongated toilets



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:53 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

IAPMO/ANSI Z124.5

Technical Information

All product dimensions are nominal.

Seat Shape Type:	Elongated
Seat Front Type:	Closed-front
Seat-Mounting Holes:	5-1/2" (140 mm)

Material


- Plastic construction

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



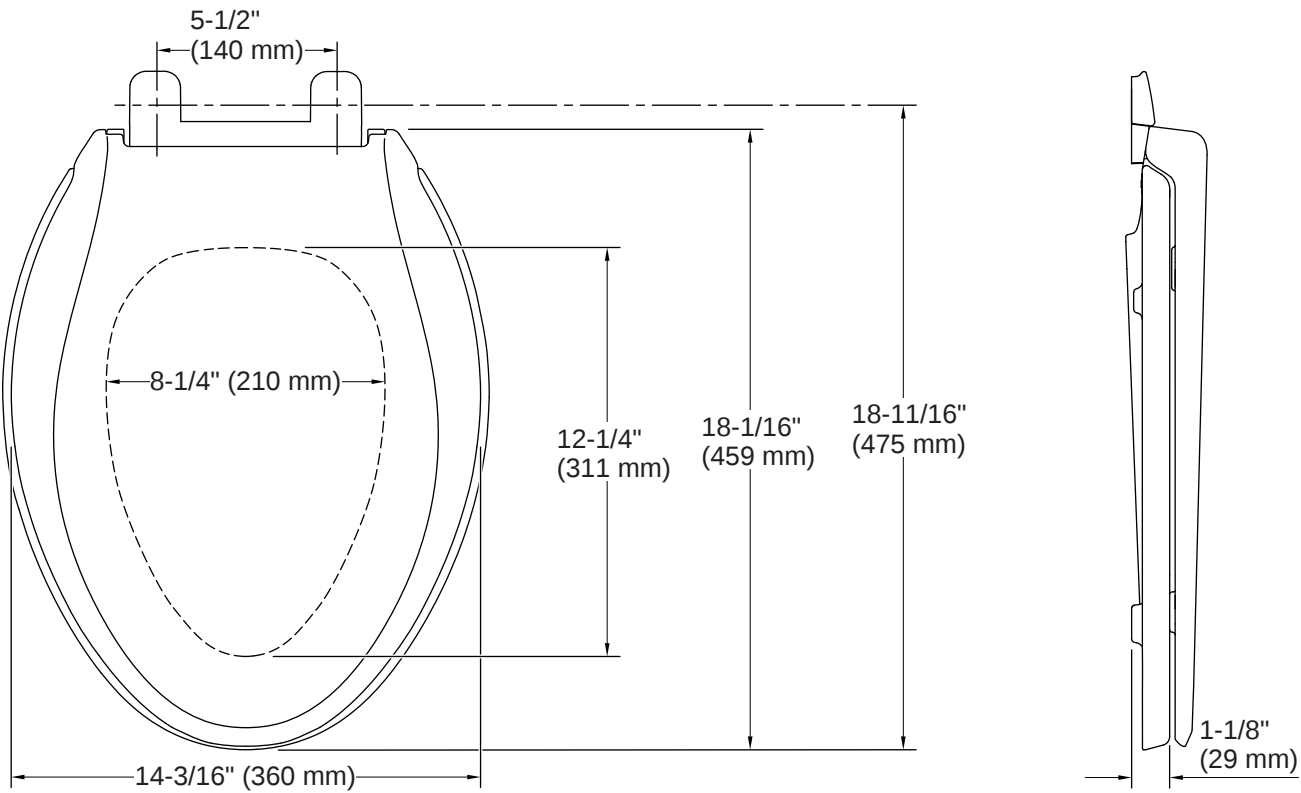

Installation Notes

Install this product according to the installation instructions.





Corbelle® | K-20120-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-3814 Corbelle toilet



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
G	Brushed Chrome
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium
BGP	Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:31 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 19:31 - US-CA

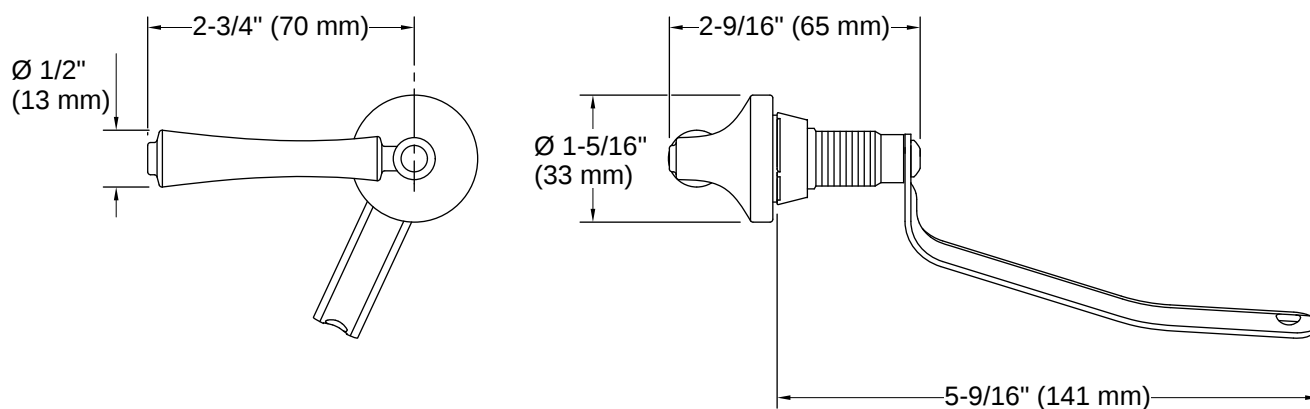

Installation Notes

Install this product according to the installation instructions.





Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White



Corbelle Two Piece Elongated Toilet With Skirted Trapway, 1.28 GPF - White



Cachet Readylatch Quiet Close Elongated Toilet Seat - White



Corbelle Left Hand Trip Lever - Vibrant Polished Nickel

Bath 4 FERGUSON SUPPLIED



Signature Hardware SHWSCBE807PN

Beasley 1.2 GPM Widespread Bathroom Faucet with
Pop-Up Drain Assembly


Finish: Polished Nickel
Qty: 1



Signature Hardware SH4001

Accufit 4001 Series 1/2" Pressure Balanced Rough-In
Valve With Stops

Finish: N/A
Qty: 1

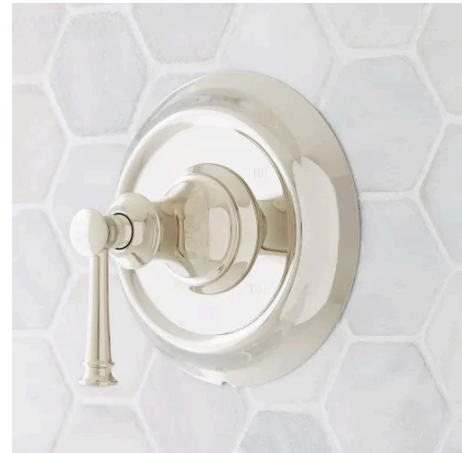

Signature Hardware SHK449304

Beasley Pressure Balanced Valve Trim - Accufit Rough-
In Valve Included

Finish: Polished Nickel
Qty: 1



Signature Hardware SHSH2040GPN

FundamentALL 4-1/2" Round Multifunction 1.75 GPM
Shower Head

Finish: Polished Nickel
Qty: 1




Signature Hardware SHSK82PN

6" Standard Wall Mounted Shower Arm and Flange

Finish: Polished Nickel
Qty: 1

BEASLEY WIDESPREAD BATHROOM FAUCET

Product Code: SHWSCBE807

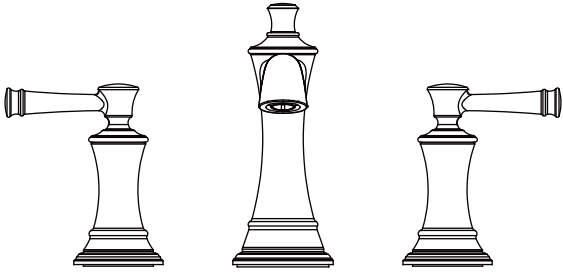

Product Features

- Max. flow rate: 1.2 gpm (4.5 L/min) @ 60 psi
- Metal handles
- Ceramic disc cartridges
- Installation: 3-hole
- Metal construction for strength and durability
- Swivel spout: no
- Drain type: metal push-pop with overflow

Product Dimensions

- Overall height: 6-5/16"
- Spout reach: 5-5/16"
- Connection type: 1/2" IPS

Codes and Certifications



- Meets ASME A112.18.1 / CSA B125.1
- NSF/ANSI/CAN 61
- NSF/ANSI/CAN 372
- cUPC/IAPMO Listed
- ADA Compliant
- CalGreen Certified
- EPA WaterSense Certified
- Massachusetts Accepted
- Listed on California Energy Commission MAEDbS Database


Finish Options

- AGBR - Aged Brass
- BG - Brushed Gold
- CP - Chrome
- PN - Polished Nickel
- ZBN - Brushed Nickel

Revised: 12/16/25

BEASLEY WIDESPREAD BATHROOM FAUCET

Product Code: SHWSCBE807

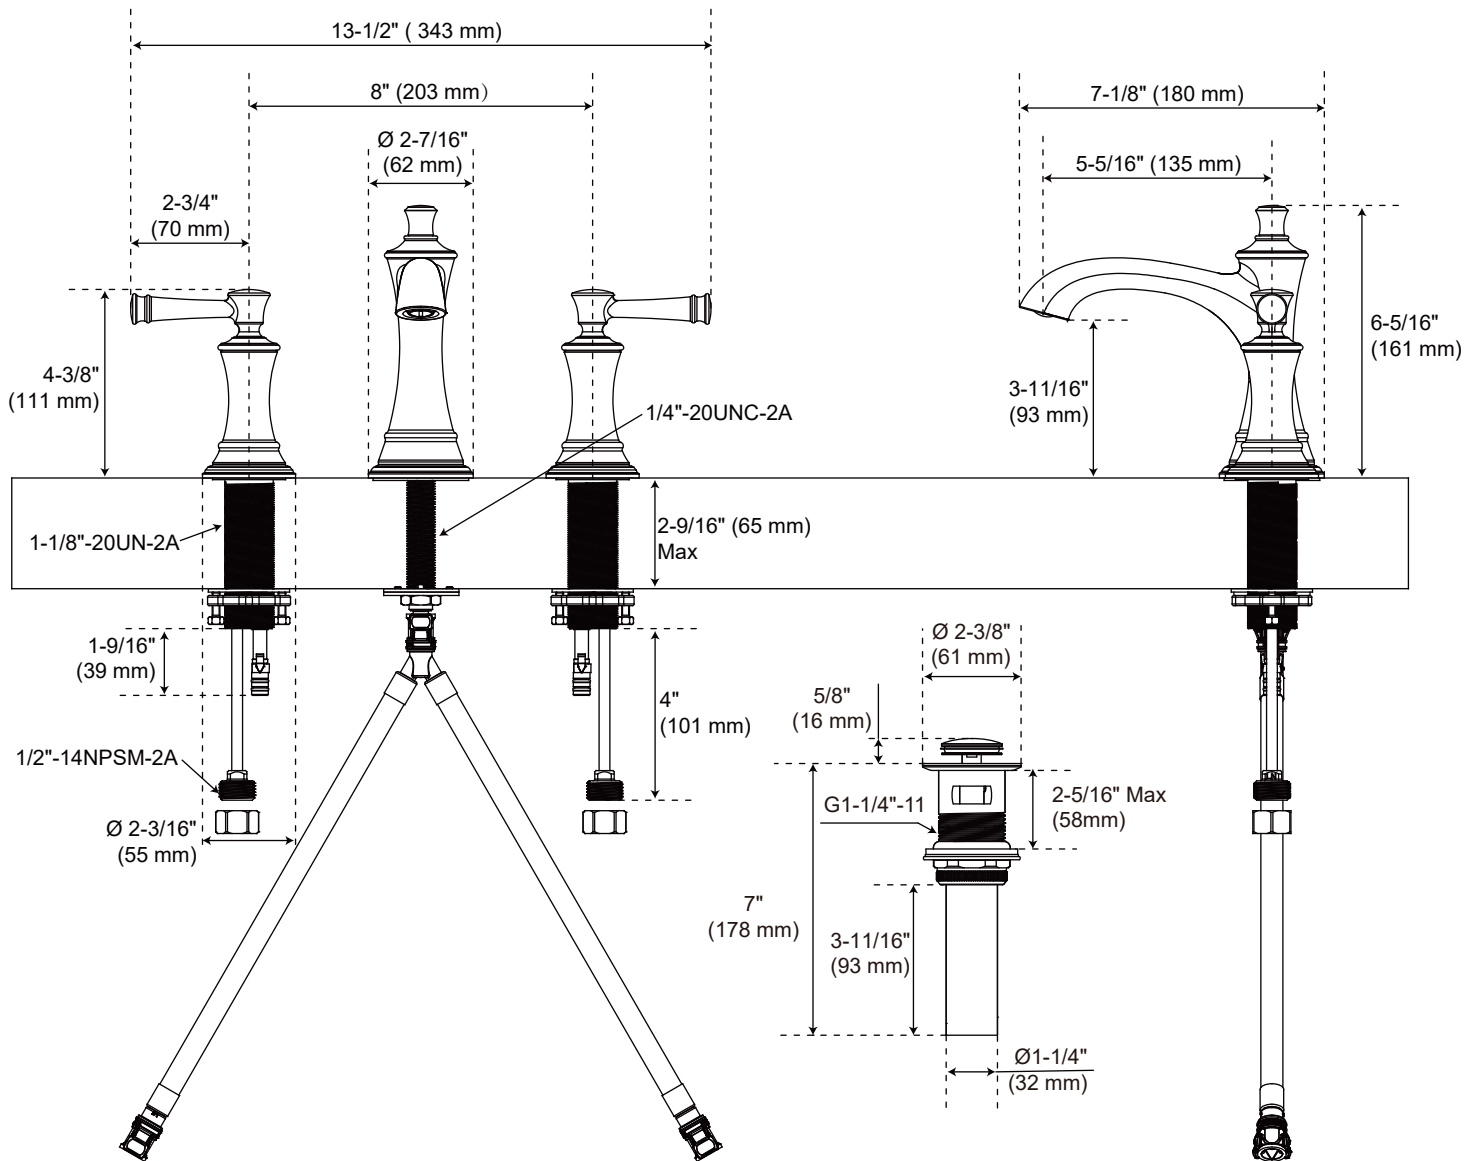

All dimensions and specifications are nominal and may vary. Use actual products for accuracy

Revised: 12/16/25



Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Features

- Rectangular basin
- Overflow drain
- No faucet holes; requires wall- or counter-mount faucet



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----------|--------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651

Technical Information

With Overflow:	Yes
Drain Hole Diameter:	1-3/4" (44 mm)
Basin Configuration:	Single Bowl
Basin Length:	17-5/8" (448 mm)
Basin Width:	13-1/8" (334 mm)
Basin Depth:	5-5/16" (135 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment
K-23725 Cast iron cleaner




Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

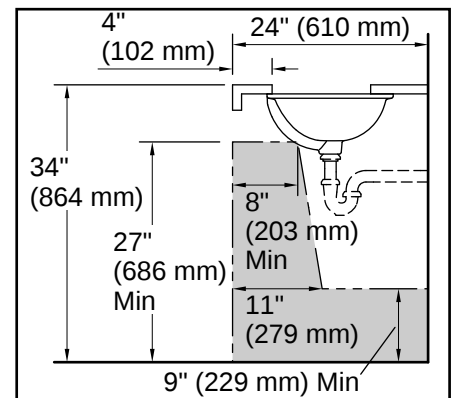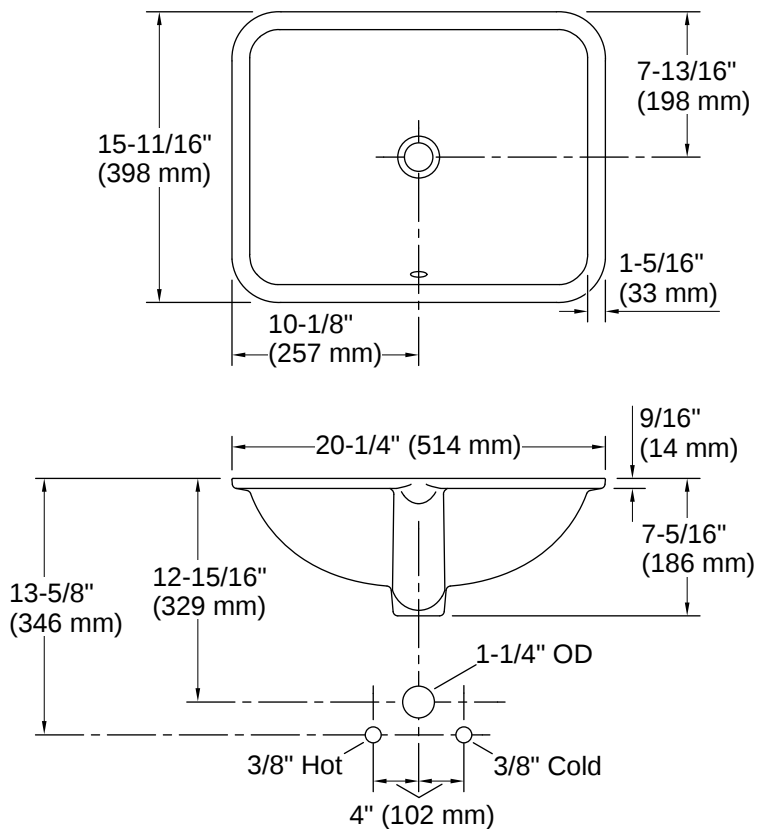
Recommended ADA Installation


Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-30-2026 21:0 - US-CA

ROUND MULTIFUNCTION SHOWER HEAD

SKU: 948950
Code: SHSH2040G



FEATURES

Material: ABS
Shower Head Swivel: Yes
Shower Head Spray: Full, Massage, Massage + Full
Shower Head Flow Rate: 1.75 gpm (6.6 L/min) @ 80 psi
Flow Rate: 1.75 gpm (6.6 L/min) @ 80 psi

ASME A112.18.1/CSA B125.1, CEC Listed, WaterSense by IAPMO, Massachusetts Accepted, LISTED ID: SHSH2040G*





ADDITIONAL FEATURES

- 3 function shower head (full spray, massage spray and full & massage spray).
- Self cleaning rubber nozzles.
- Easy installation.

REVISED 9/2/2025

ROUND MULTIFUNCTION SHOWER HEAD

SKU: 948950
Code: SHSH2040G

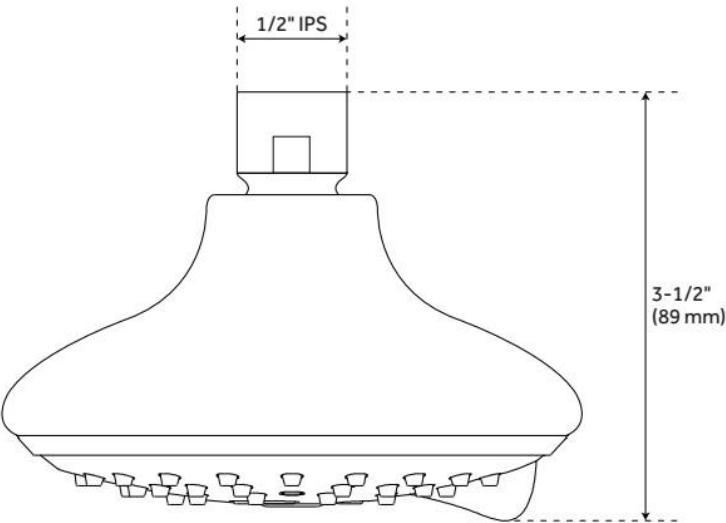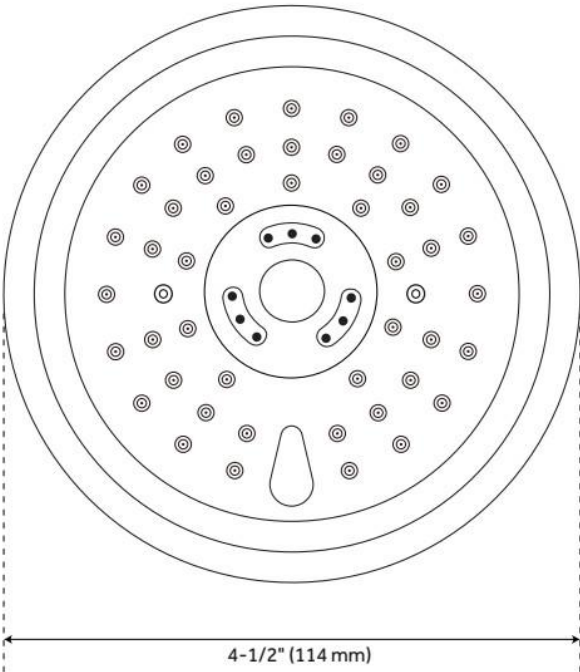

REVISED 9/2/2025

6" STANDARD SHOWER ARM

SKU: 948961
Code: SHSK82

FEATURES

Material: Brass
Connection Type: 1/2" NPT



ASME A112.18.1/CSA B125.1, Massachusetts Accepted, LISTED ID: SHSK82**



ADDITIONAL FEATURES

- Escutcheon included.
- Easy installation.

REVISED 6/5/2024

6" STANDARD SHOWER ARM

SKU: 948961
Code: SHSK82

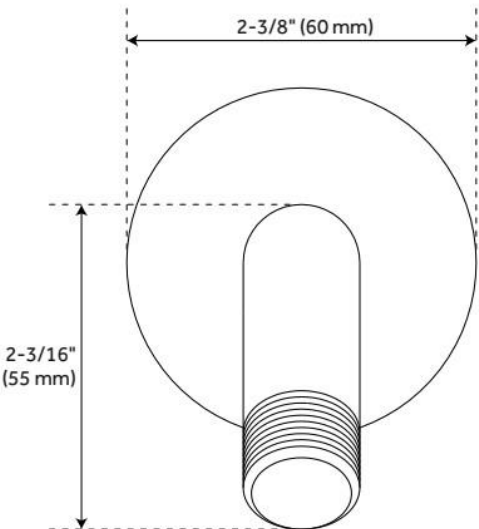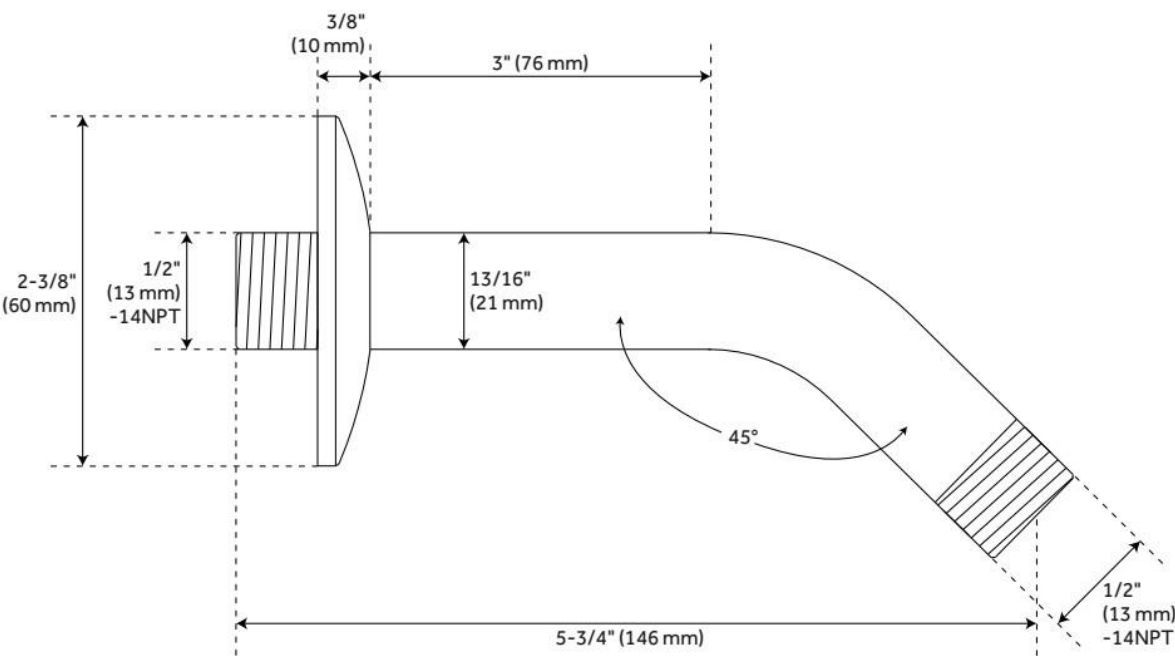

REVISED 6/5/2024

BEASLEY PRESSURE BALANCE SHOWER VALVE

SKU: 948689

Code: SHBE80102, SH4001



FEATURES

Material: Brass

Required for Installation: Rough-in valve: SH4001

ASME A112.18.1/CSA B125.1, ASSE 1016 Type P, ICC/ANSI A117.1, Massachusetts Accepted, LISTED ID: SH4001, SHBE80102*




ADDITIONAL FEATURES

- Metal lever handle.
- Optional Rough-in Valve:
 - Pressure balance valve with integral stops.
 - One-piece cartridge design for ease of maintenance.
 - Back-to-back capability.
 - Ceramic disc valve cartridge.
 - Cast bronze valve body.
 - Adjustable temperature limit stop.
 - Quick remove plaster guard.
 - Easy mounting brackets.

REVISED 2/8/2025

BEASLEY PRESSURE BALANCE SHOWER VALVE

SKU: 948689
Code: SHBE80102, SH4001

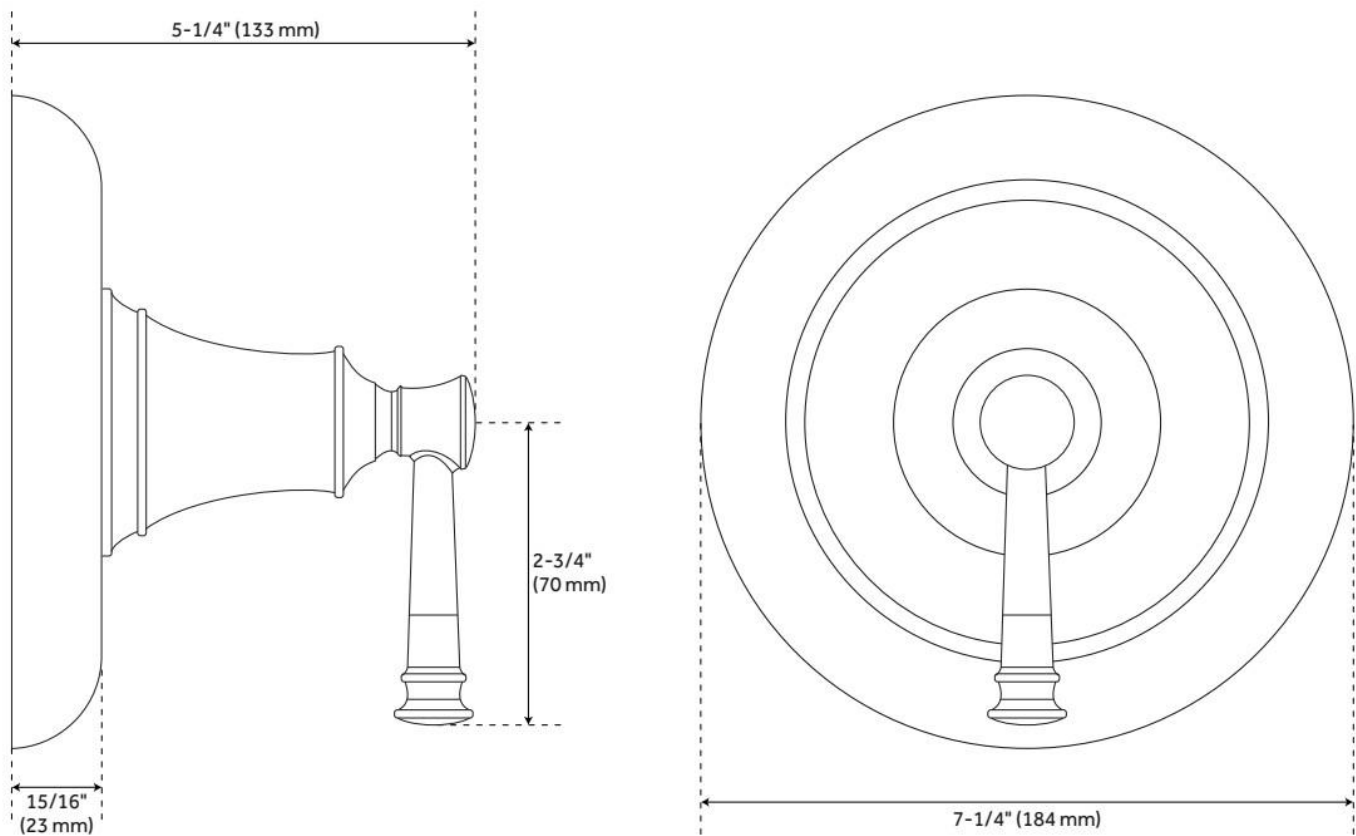

REVISED 2/8/2025

PRESSURE BALANCE TUB & SHOWER ROUGH-IN VALVE

SKU: 446520
Code: SH4001



FEATURES

Material: Brass
Flow Rate: 6.34 gpm (24.0 L/min) @ 80 psi
Connection Type: 1/2" MIP and SWT
Cartridge Type: Ceramic Disc

IAPMO, ASME A112.18.1/CSA B125.1, ASSE 1016 Type P, Massachusetts Accepted, LISTED ID: SH4001




ADDITIONAL FEATURES

- Pressure balance valve with integral stops.
- One-piece ceramic cartridge design for ease of maintenance.
- Back-to-back capability
- Adjustable temperature limit stop.
- Quick remove plaster guard and easy mounting brackets.

REVISED 2/8/2025

PRESSURE BALANCE TUB & SHOWER ROUGH-IN VALVE

SKU: 446520
Code: SH4001

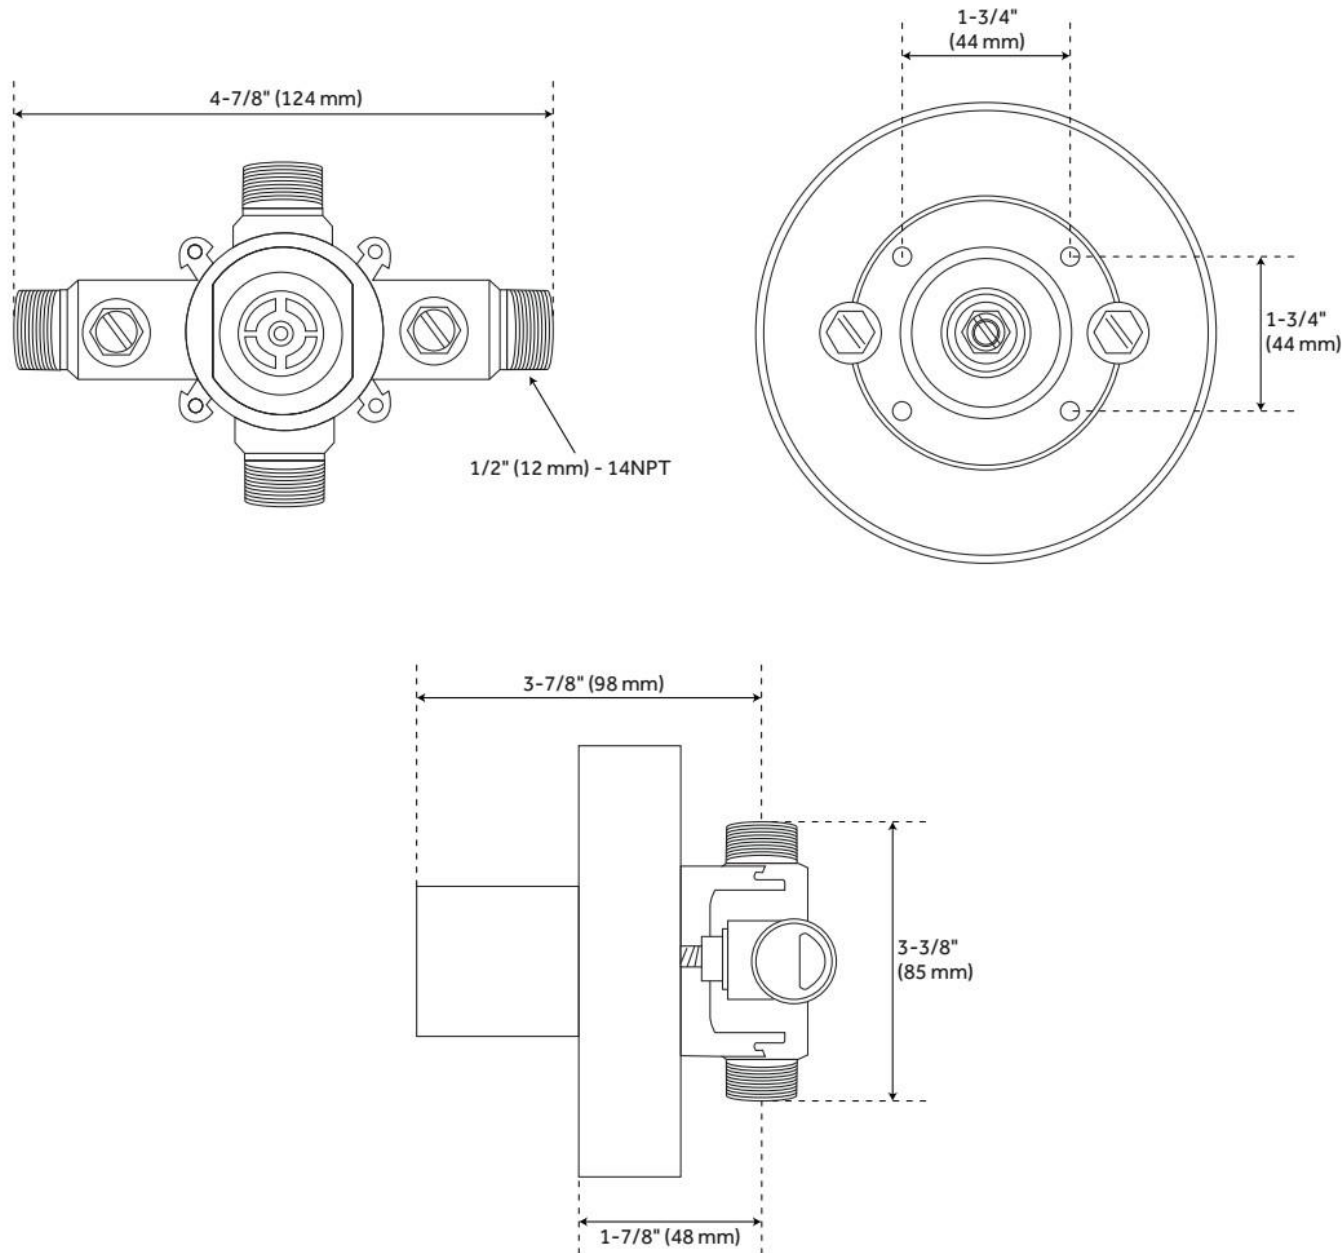

REVISED 2/8/2025



Corbelle® | K-4144

Elongated toilet bowl with skirted trapway

Features

- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Revolution 360® flushing technology generates a forceful swirling motion to keep the bowl clean longer
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- CleanCoat™ surface treatment inhibits the growth of water scale and mineral stains for improved ease of cleaning
- Combines with the K-4143, K-4143-RA, or K-5711 tank to create a complete K-3814, K-3814-RA, or K-5709 Corbelle toilet
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 17:12 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.19.2/CSA B45.1

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Revolution 360
Bowl Shape:	Elongated
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted

Recommended Products/Accessories

K-23726 Drain treatment
K-4143 Toilet tank, 1.28 gpf

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.
This product is a component and not intended to be a standalone installation.

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Seat sold separately

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.





Corbelle® | K-4143

Toilet tank, 1.28 gpf

Features

- 1.28 gpf (4.8 lpf)
- Combines with the K-4144 bowl to create a complete K-3814 Corbelle toilet
- Alternative options available: Corbelle toilet tank with ContinuousClean - K-5711
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Left-hand trip lever



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 16:0 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ASME A112.19.2/CSA B45.1
EPA WaterSense®

Technical Information

Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)

Recommended Products/Accessories

K-23726 Drain treatment

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.

This product is a component and not intended to be a standalone installation.

Installation

- Supply line sold separately
 - Supply line sold separately
-

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.





Cachet® | K-4636-RL

ReadyLatch® Quiet-Close™ elongated toilet seat

Features

- Grip-Tight installation hardware makes it easy to fasten the seat – everything is done from above the bowl
- ReadyLatch® hinge provides a positive lock/unlock latch to securely hold seat in position, yet seat easily removes for cleaning or adjusting fit
- Quiet-Close™ elongated lid and seat prevents slamming
- Grip-Tight bumpers hold seat firmly in place
- Contoured seat for user comfort
- Color-matched plastic hinges
- Fits most elongated toilets



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:53 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

IAPMO/ANSI Z124.5

Technical Information

All product dimensions are nominal.

Seat Shape Type:	Elongated
Seat Front Type:	Closed-front
Seat-Mounting Holes:	5-1/2" (140 mm)

Material


- Plastic construction

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



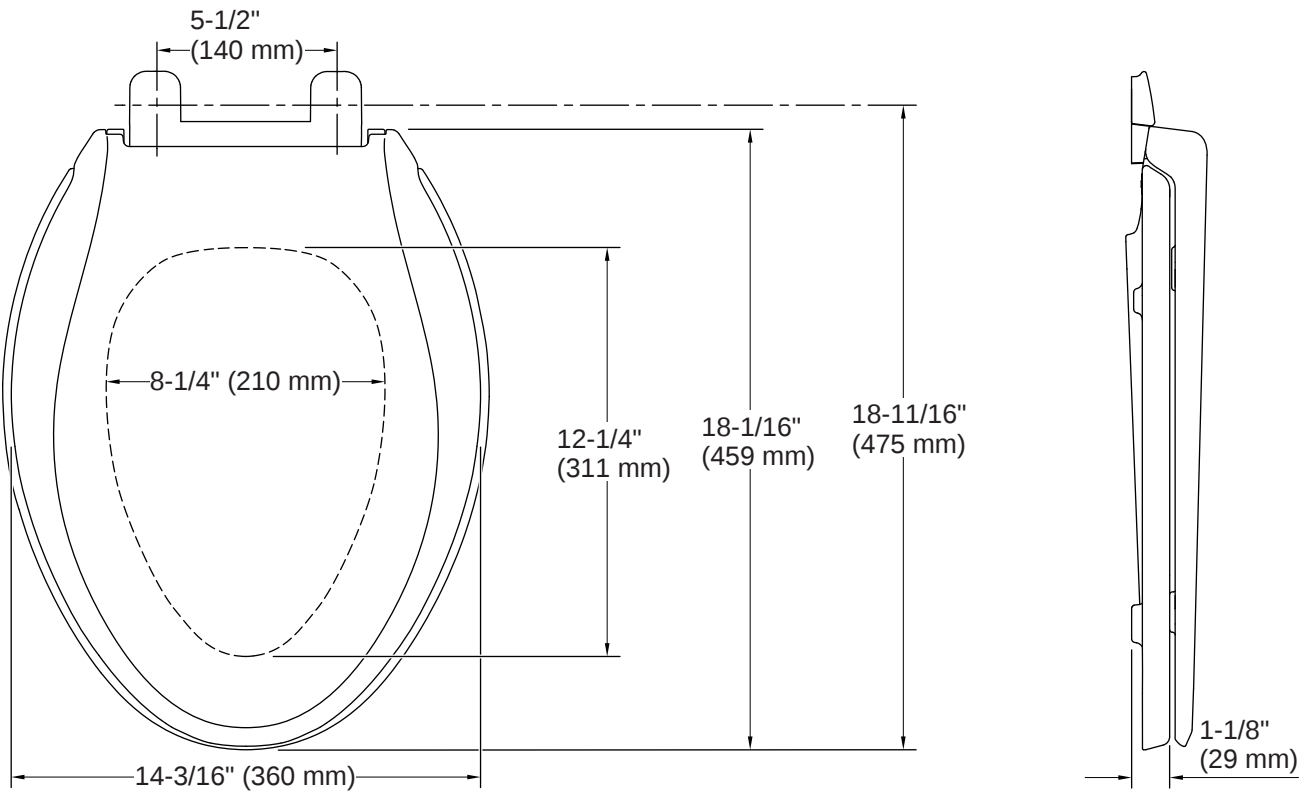

Installation Notes

Install this product according to the installation instructions.





Corbelle® | K-20120-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-3814 Corbelle toilet



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
G	Brushed Chrome
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium
BGP	Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:31 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



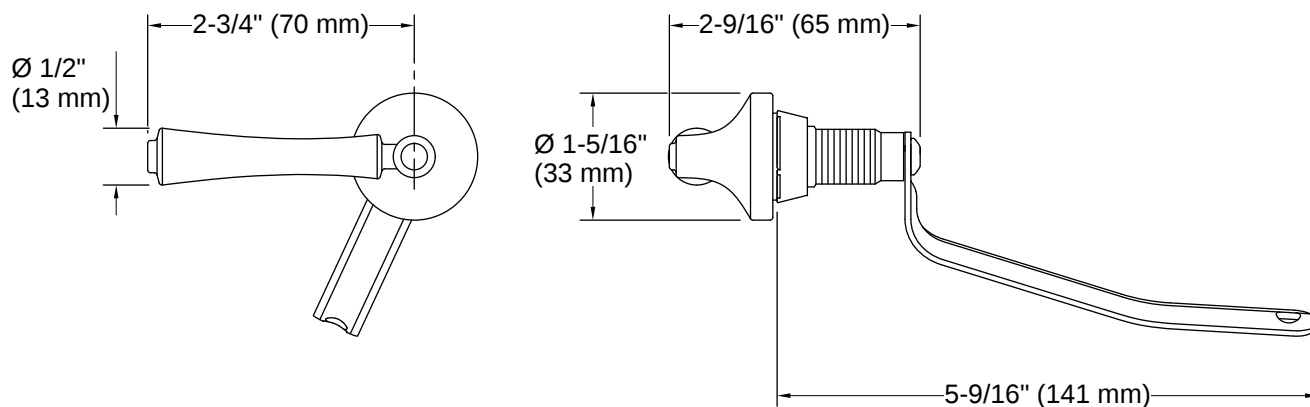

Installation Notes

Install this product according to the installation instructions.





Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White



Corbelle Two Piece Elongated Toilet With Skirted Trapway, 1.28 GPF - White



Cachet Readylatch Quiet Close Elongated Toilet Seat - White



Corbelle Left Hand Trip Lever - Vibrant Polished Nickel

LL POWDER BATH FAUCET
SELECT **TBD**

FINALIZE AFTER SELECTION
OF VANITY



Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Features

- Rectangular basin
- Overflow drain
- No faucet holes; requires wall- or counter-mount faucet



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----------|--------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651

Technical Information

With Overflow:	Yes
Drain Hole Diameter:	1-3/4" (44 mm)
Basin Configuration:	Single Bowl
Basin Length:	17-5/8" (448 mm)
Basin Width:	13-1/8" (334 mm)
Basin Depth:	5-5/16" (135 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment
K-23725 Cast iron cleaner



Warranty

See website for detailed warranty information.


KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

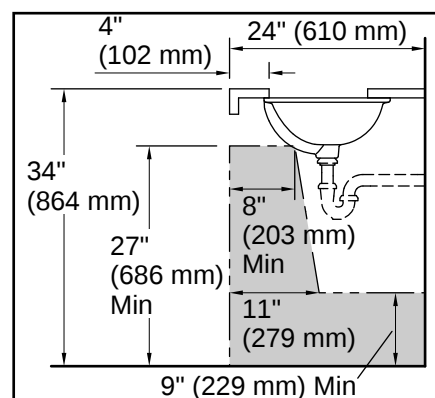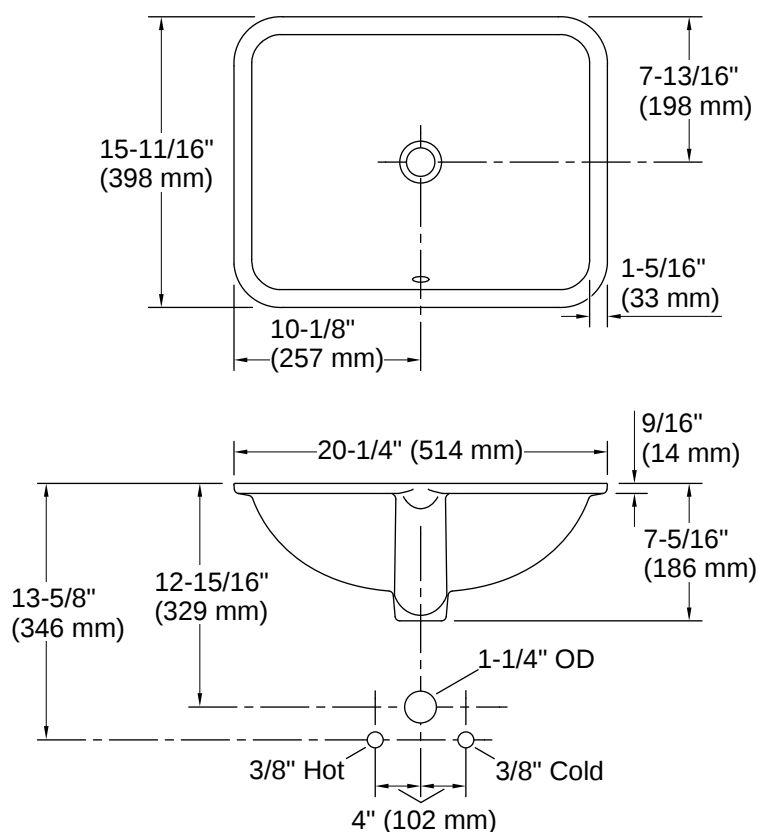

Recommended ADA Installation



Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-30-2026 21:0 - US-CA

THE BOLD LOOK
OF **KOHLER**



Corbelle® | K-4144

Elongated toilet bowl with skirted trapway

Features

- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Revolution 360® flushing technology generates a forceful swirling motion to keep the bowl clean longer
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- CleanCoat™ surface treatment inhibits the growth of water scale and mineral stains for improved ease of cleaning
- Combines with the K-4143, K-4143-RA, or K-5711 tank to create a complete K-3814, K-3814-RA, or K-5709 Corbelle toilet
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



1-800-4KOHLE (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 17:12 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.19.2/CSA B45.1

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Revolution 360
Bowl Shape:	Elongated
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted

Recommended Products/Accessories

K-23726 Drain treatment
K-4143 Toilet tank, 1.28 gpf

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.
This product is a component and not intended to be a standalone installation.

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Seat sold separately

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.



Corbelle® | K-4143

Toilet tank, 1.28 gpf

Features

- 1.28 gpf (4.8 lpf)
- Combines with the K-4144 bowl to create a complete K-3814 Corbelle toilet
- Alternative options available: Corbelle toilet tank with ContinuousClean - K-5711
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Left-hand trip lever



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	7	Black Black



Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ASME A112.19.2/CSA B45.1
EPA WaterSense®

Technical Information

Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)

Recommended Products/Accessories

K-23726 Drain treatment

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



No image available.
This product is a component and not intended to be a standalone installation.

Installation

- Supply line sold separately
- Supply line sold separately

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.





Cachet® | K-4636-RL

ReadyLatch® Quiet-Close™ elongated toilet seat

Features

- Grip-Tight installation hardware makes it easy to fasten the seat – everything is done from above the bowl
- ReadyLatch® hinge provides a positive lock/unlock latch to securely hold seat in position, yet seat easily removes for cleaning or adjusting fit
- Quiet-Close™ elongated lid and seat prevents slamming
- Grip-Tight bumpers hold seat firmly in place
- Contoured seat for user comfort
- Color-matched plastic hinges
- Fits most elongated toilets



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:53 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

IAPMO/ANSI Z124.5

Technical Information

All product dimensions are nominal.

Seat Shape Type:	Elongated
Seat Front Type:	Closed-front
Seat-Mounting Holes:	5-1/2" (140 mm)

Material


- Plastic construction

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



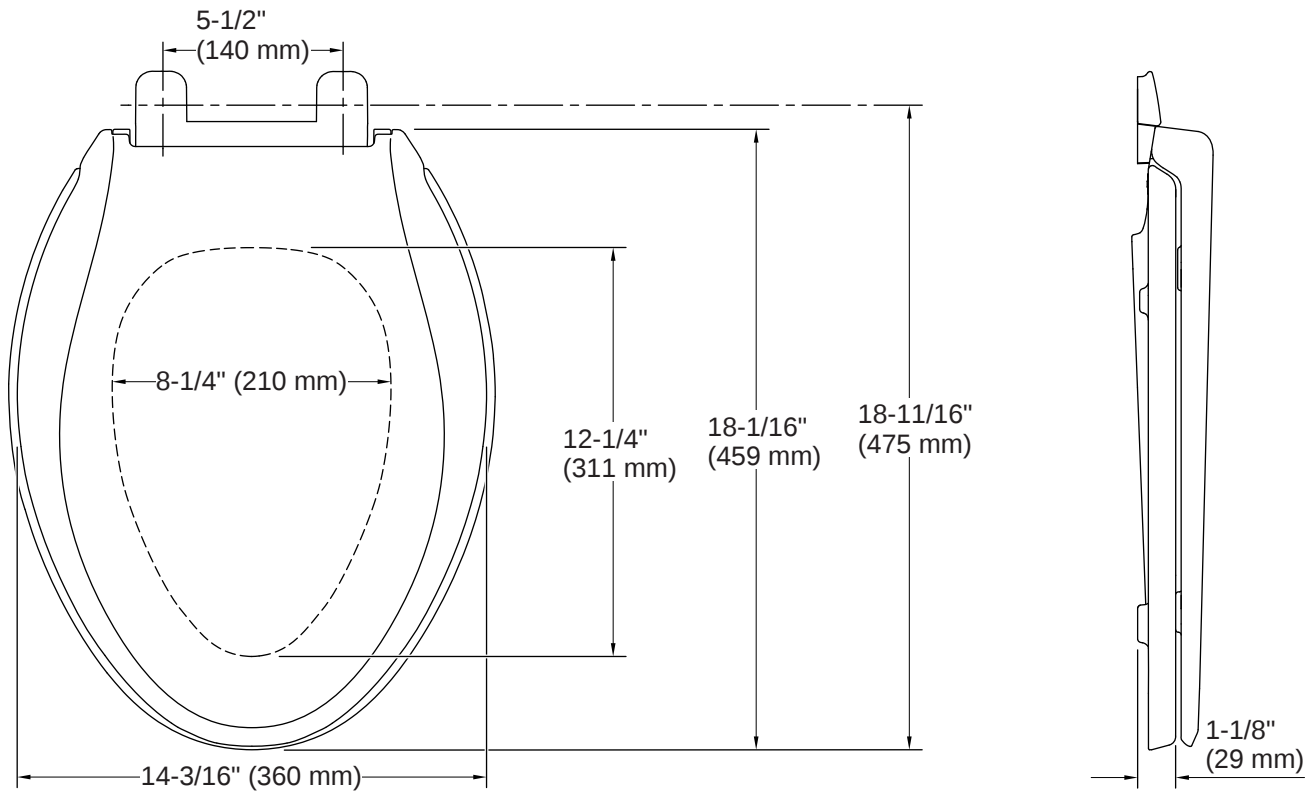

Installation Notes

Install this product according to the installation instructions.





Corbelle® | K-20120-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-3814 Corbelle toilet



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
G	Brushed Chrome
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium
BGP	Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:31 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



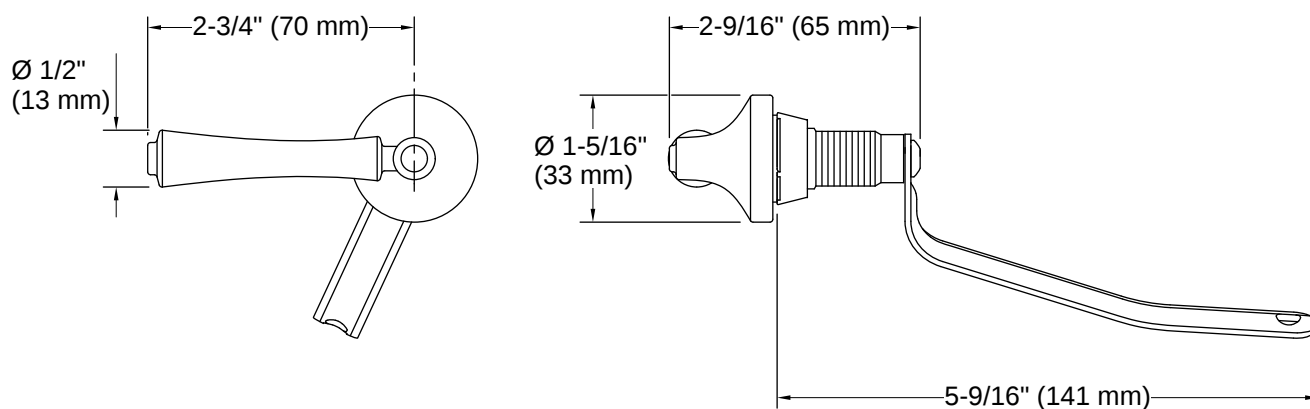

Installation Notes

Install this product according to the installation instructions.

