



Date: 7/2/2026

14135 S. 220th St.
Gretna, NE 68028
402-321-3332
midwestpouredwalls@gmail.com

McNeil Company Builders

Quote

811 N 143RD PLAZA HOGAN RES

- 1. The prices in this proposal reflect our current concrete and delivery price through a ready mixed supplier that services this project location. If concrete and/or delivery price increases occur, these increased costs will be added to the quoted price.
- 2. Rebar will be placed as per plans and specifications provided.
- 3. This proposal assumes existing soil conditions are suitable for proper bearing and earthen bank stability. If existing conditions require extra excavation, rebar, concrete, formwork or labor, these added costs will be billed in addition to the quoted amount.
- 4. The jobsite, including foundation excavation, are to be in accordance to O.S.H.A. requirements.
- 5. Unless noted otherwise, the backfilling of the foundation or the footings is not included in this proposal.
- 6. Any changes in the quantities listed in this proposal may result in additional charges.
- 7. Unless noted otherwise, this proposal does not include any extra costs associated with cold weather concreting. If as a result of cold weather conditions, adjustments to the concrete mix design, additional protection of the concrete and/or curing adjustments to the concrete mix design are made necessary, these added costs will be billed in addition to this quoted amount.
- 8. Accounts 30 days past due are subject to a 1 1/2% per month or 18% per year service charge.

Job Notes:

Items		
Name	Qty	Units
12'-10" WALL WITH 20"-8" FTG	7.00	FT
11'6"-16" WALL WITH 24"-8" FTG	9.72	FT
11'6"-14" WALL WITH 24"-8" FTG	48.20	FT
11'6"-10" WALL WITH 20"-8" FTG	73.17	FT
11'6"-8" WALL WITH 20"-8" FTG	26.52	FT
11'-24" WALL WITH 32"-8" FTG	5.41	FT
11'-22" WALL WITH 32"-8" FTG	4.87	FT
11'-20" WALL WITH 32"-8" FTG	4.24	FT
11'-10" WALL WITH 20"-8" FTG	131.04	FT
11'-8" WALL WITH 20"-8" FTG	5.81	FT
5'-24" WALL WITH 32"-8" WIDE FTG	2.69	FT
5'-10" WALL WITH 20"-8" WIDE FTG	73.94	FT
4'-16" WALL WITH 24"-8" WIDE FTG	1.35	FT
4'-8" WALL WITH 16"-8" WIDE FTG	20.44	FT
3'6"-10" WALL WITH 20"-8" FTG	23.67	FT
1'-8" WALL WITH 16"-8" WIDE FTG	22.43	FT
48"-48"-18" PAD	1.00	EA
36"-36"-18" PAD	9.00	EA
Window Opening	2.00	EA
BRICK LEDGE SQ FT	1041.67	SQ FT
SIMPSON STRAPS	4.00	EA
11 FT ANGLED CORNER	2.00	EA
Pump Charge	1.00	EA

Approved By:	\$92,050.57
Print Name:	
Company:	
Job Title:	



We appreciate the opportunity to bid on your project!


LINTEL SUPPORT:

- (L1) GALVANIZED L-4X4X5/16" BRICK LEDGER ANGLE W/ 8" BEARING AT EACH END.
(L2) GALVANIZED L-6X4X5/16" (LONG LEG VERTICAL) BRICK LEDGER ANGLE W/ 8" BEARING AT EACH END.
(L3) GALVANIZED L-7X4X3/8" (LONG LEG VERTICAL) BRICK LEDGER ANGLE W/ 12" BEARING AT EACH END.
(L4) GALVANIZED L-6X4X5/16" (LONG LEG VERTICAL) BRICK LEDGER ANGLE W/ PAIRS OF SIMPSON SDS-25000 WOOD SCREWS AT 3" GAGE AT 16" O.C.
(L5) PROVIDE #5 BARS AT 6" O.C. (2 TOTAL) W/ CLEARANCE FROM TOP AND SIDES OF OPENINGS FOR JAMB AND LINTEL REINFORCING, EXTEND REINFORCING A MIN. OF 24" PAST OPENING EDGES
(L6) PROVIDE #5 BARS AT 3" O.C. (THREE TOTAL) WITH 2" CLEARANCE FROM TOP AND SIDES OF OPENINGS FOR JAMB AND LINTEL REINFORCING, EXTEND REINFORCING A MINIMUM OF 2'-0" PAST OPENING EDGES

STRUCTURAL HEADERS:


- (H1) (2) 2X8 MIN.
(H2) (2) 2X10 MIN.
(H3) (2) 1 3/4" X 11 7/8" LVL'S MIN.
(H4) (2) 1 3/4" X 14" LVL'S MIN.
(H5) (2) 1 3/4" X 16" LVL'S MIN.

HEADERS WITHOUT NOTE ARE MIN. DOUBLE 2X6. PROVIDE 2X6 TOP AND BOTTOM PLATE FOR ALL HEADERS AND (1) JACK STUD AND (1) FULL HEIGHT KING STUD AT EACH JAMB.

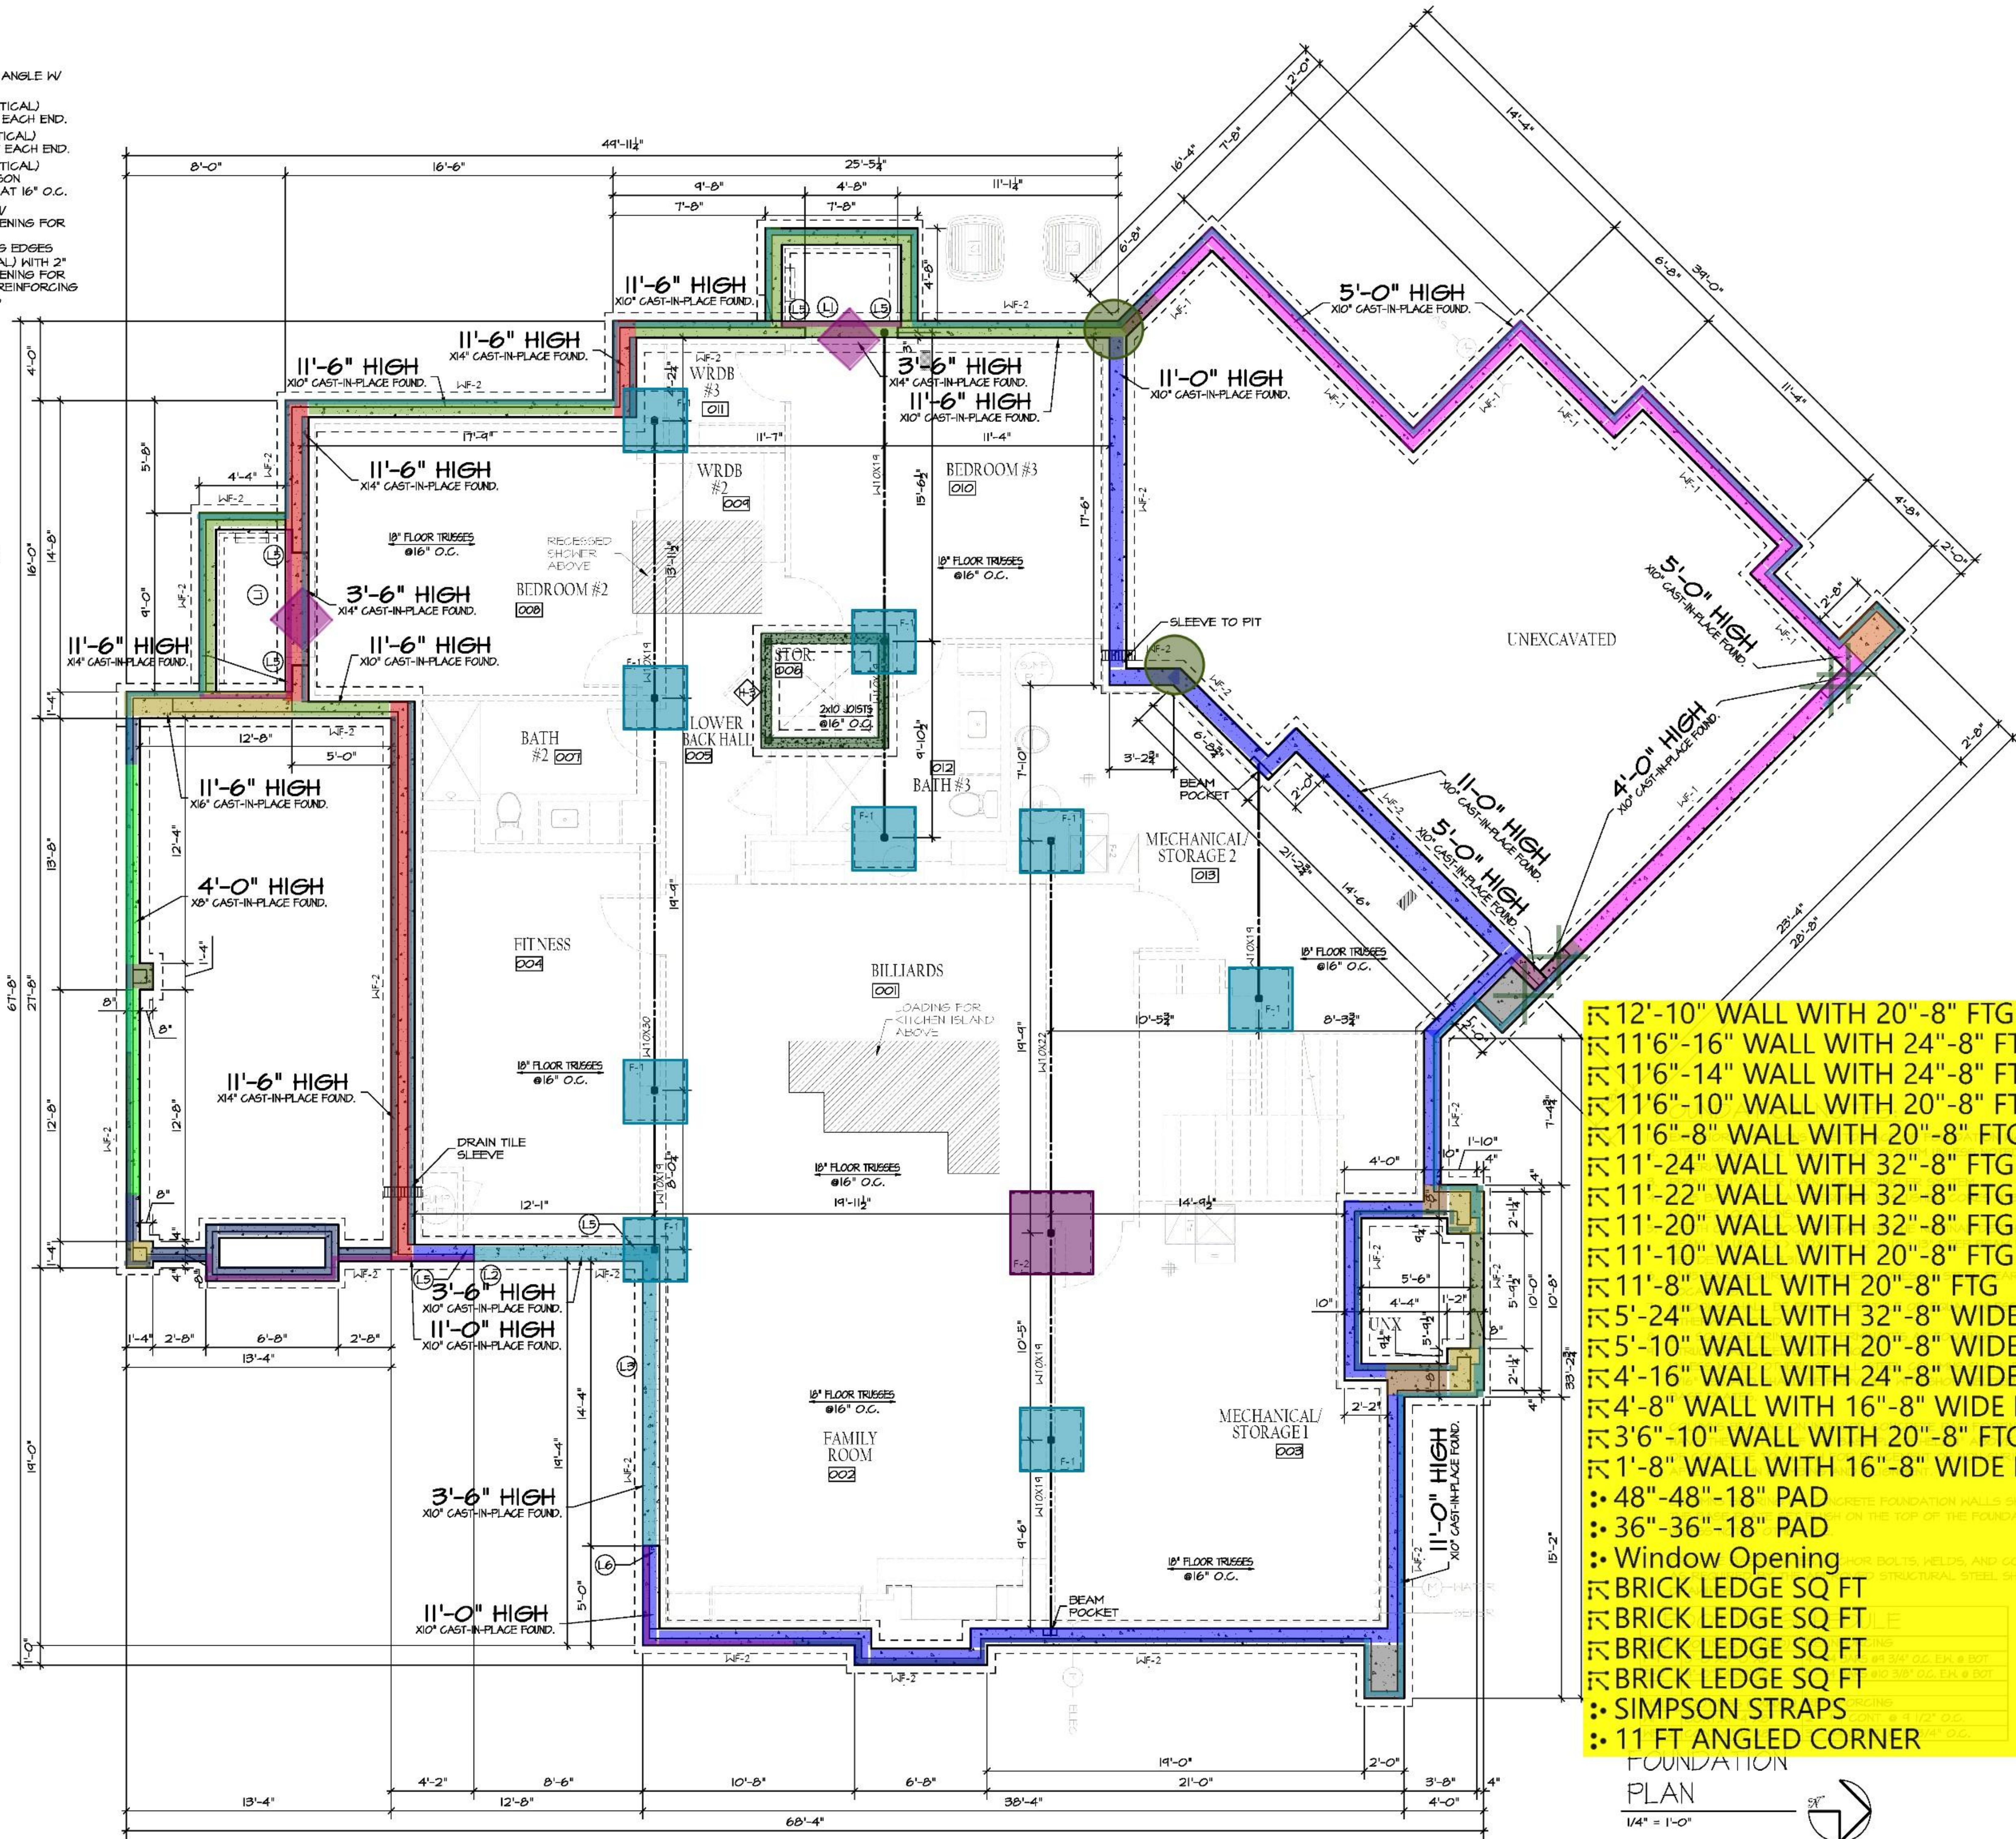

12'-10" WALL WITH 20"-8" FTG	7.00 FT
11'-6"-16" WALL WITH 24"-8" FTG	9.72 FT
11'-6"-14" WALL WITH 24"-8" FTG	48.20 FT
11'-6"-10" WALL WITH 20"-8" FTG	73.17 FT
11'-6"-8" WALL WITH 20"-8" FTG	26.52 FT
11'-24" WALL WITH 32"-8" FTG	5.41 FT
11'-22" WALL WITH 32"-8" FTG	4.87 FT
11'-20" WALL WITH 32"-8" FTG	4.24 FT
11'-10" WALL WITH 20"-8" FTG	131.04 FT
11'-8" WALL WITH 20"-8" FTG	5.81 FT
5'-24" WALL WITH 32"-8" WIDE FTG	2.69 FT
5'-10" WALL WITH 20"-8" WIDE FTG	73.94 FT
4'-16" WALL WITH 24"-8" WIDE FTG	1.35 FT
4'-8" WALL WITH 16"-8" WIDE FTG	20.44 FT
3'-6"-10" WALL WITH 20"-8" FTG	23.67 FT
1'-8" WALL WITH 16"-8" WIDE FTG	22.43 FT
48"-48"-18" PAD	1.00 EA
36"-36"-18" PAD	9.00 EA
Window Opening	2.00 EA
BRICK LEDGE SQ FT	388.97 SQ FT
BRICK LEDGE SQ FT	46.22 SQ FT
BRICK LEDGE SQ FT	422.33 SQ FT
BRICK LEDGE SQ FT	184.15 SQ FT
SIMPSON STRAPS	4.00 EA
11 FT ANGLED CORNER	2.00 EA

FOUNDATION PLAN
1/4" = 1'-0"

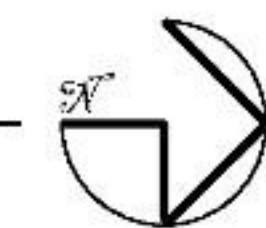

HOGAN
RESIDENCE

811 N 143RD PLAZA OMAHA, NE 68154

McNEIL	7.00 FT	Y
Street	9.72 FT	137
2	48.20 FT	2
com	73.17 FT	26
FE	26.52 FT	ATE
26	5.41 FT	01/26
ATE	4.87 FT	
01/26	4.24 FT	
	131.04 FT	
	5.81 FT	
	2.69 FT	
	73.94 FT	
	1.35 FT	
	20.44 FT	
	23.67 FT	
	22.43 FT	
	1.00 EA	
	9.00 EA	
	2.00 EA	
BRICK	388.97 SQ FT	
LEDGE	46.22 SQ FT	
SQ FT	422.33 SQ FT	
SQ FT	184.15 SQ FT	
SIMPSON	4.00 EA	
STRAPS	2.00 EA	
11 FT		
ANGLED		
CORNER		

© COPYRIGHT
McNEIL COMPANY
THESE PLANS ARE SPECIFICALLY
DESIGNED FOR CONSTRUCTION BY
McNEIL COMPANY AND ARE
INTENDED FOR NO OTHER PURPOSE.
REPLICATION OF THESE PLANS IN
ANY MANNER WITHOUT WRITTEN
CONSENT FROM McNEIL COMPANY
IS PROHIBITED.