

**** (SPEC BOOK) ****
**** (REVISED 7/30/26) ****

TIM & MARY CROCKETT
1702 S 150TH AVE

BRIANNE WILHELM DESIGNER
MCNEIL COMPANY BUILDERS

NAME	Carrie Geihs
EMAIL	cgeihs@kbbriggs.com
PHONE	402.330.3400
FAX	402.502.1161
ADDRESS	K&B by Briggs 13827 Industrial Rd Omaha, NE 68137

Table of Contents

VENDOR PART	VENDOR	DESCRIPTION	PAGE
KITCHEN			
IWS-4-S-GT	The Galley	The Galley Workstation Ideal Workstation 4s With Five Tool Culinary Kit - Graphite Wood Composite	8
IPro750	InSinkErator	Ipro750 3/4hp Garbage Disposer	11
K-11352-BN	Kohler	Disposal Flange With Stopper - Vibrant Brushed Nickel	12
KITCHEN (OPTION 1 - FILTRATION IN MAIN FAUCET)			
IWTF-D-YSS-HF	The Galley	The Galley Tap Ideal Tap High Flow And Water Filtration System - Pvd Brushed Gold	16
ISD-1-YSS	The Galley	The Galley Tap Ideal Soap Dispenser - Pvd Brushed Gold	17
IDS-1-YSS	The Galley	The Galley Tap Ideal Deck Switch - Pvd Brushed Gold	18
KITCHEN (OPTION 2)			
K-28669-9-2MB	Kohler	Billet Pull Down Kitchen Sink Faucet With Two Function Sprayhead - Vibrant Brushed Moderne Brass	20
K-28676-2MB	Kohler	Billet Beverage Faucet - Vibrant Brushed Moderne Brass	23
K-28679-2MB	Kohler	Billet Soap / Lotion Dispenser - Vibrant Brushed Moderne Brass	26
K-35724-2MB	Kohler	Garbage Disposal Air Switch Kit - Vibrant Brushed Moderne Brass	29
BAR			
ELG1616BK0	Elkay	Quartz Classic 15 3/4" X 15 3/4" X 7 11/16" Single Bowl Dual Mount Bar Sink - Black	33
1959LF-BL	Delta	Trinsic True Bar Limited Swivel - Matte Black	35
IPro750	InSinkErator	IPro750 3/4HP Garbage Disposer	37
K-11352-BL	Kohler	Disposal Flange With Stopper - Matte Black	38

MT951/MB	Mountain Plumbing Products	Round Classic Waste Disposer Air Switch With Direct Plug-In - Matte Black	41
GARAGE (WILL HAVE HOSE BIB)			
FFL1-WH	Fiat	23x22 Laundry Sink W / Legs White	43
K-22035-CP	Kohler	Simplix Pull Out Laundry Sink Faucet With Two Function Sprayhead - Polished Chrome	45
LAUNDRY			
443079	Blanco	Liven Dual Mount Laundry Sink - Soft White	49
63906LF-GLLHP-L	Brizo	Kintsu Pull Down Prep Faucet With Arc Spout Less Handle - Lumicoat Luxe Gold	51
HLK006-GL-L	Brizo	Kintsu Pull Down Faucet Lever Handle Kit - Luxe Gold	N/A
69052-GL	Brizo	Kintsu Flange And Strainer Kitchen - Luxe Gold	53
POWDER			
653110LF-GLLHP	Brizo	Rocresco Widespread Lavatory Faucet With Arc Spout, Less Handles - Luxe Gold	56
HK53112-GL	Brizo	Rocresco Widespread Lavatory Knob Handle Kit - Luxe Gold	N/A
RP72414GL	Brizo	Push Button Pop Up With Overflow - Luxe Gold	57
K-29000-O	Kohler	Caxton 16 1/8" Round Undermount Bathroom Sink, No Overflow - White	58
K-78080-O	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	61
K-21710-L-BV	Kohler	Reach Left Hand Trip Lever - Vibrant Brushed Bronze	64
PRIMARY			
65367LF-GLLHP-ECO	Brizo	Allaria Widespread Lavatory Faucet With Arc Spout Less Handles - Luxe Gold	70
HL5367-GL	Brizo	Allaria Widespread Handle Kit Twist Lever - Luxe Gold	72
RP72414GL	Brizo	Push Button Pop Up With Overflow - Luxe Gold	73

K-20000-O	Kohler	Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White	74
BESPRF00T-01	Bain Ultra	Essencia 6838 Freestanding Rectangular Freestanding Thermomasseur - White	77
BESPRF00N-01	Bain Ultra	**(OR)** Essencia 6838 Freestanding Rectangular Freestanding Tub - White	79
T70310-GLLHP	Brizo	Kintsu Two Handle Tub Filler Body Assembly - Luxe Gold	81
T70367-GL	Brizo	Allaria Two Handle Tub Filler Trim Kit With Twist Lever Handles - Luxe Gold	85
T71766-GL	Brizo	Kintsu Floor Mount Tub Filler Unions - Luxe Gold	N/A
R70200	Brizo	Two Handle Freestanding Tub Filler Rough	89
T66T006-GLLHP	Brizo	Kintsu Sensori Thermostatic Valve Trim Less Handle - Luxe Gold	90
HL6667-GL	Brizo	Allaria Sensori Thermostatic Handle Kit Twist Lever - Luxe Gold	N/A
R35000-WS	Brizo	Sensori Thermostatic Shower Rough	91
T66667-GL	Brizo	Allaria Sensori Volume Control Trim With Twist Lever Handle - Luxe Gold	92
R35600	Brizo	Sensori Volume Control Rough	94
87380-GL	Brizo	5" Linear Square Single Function Wall Mount Showerhead - Luxe Gold	95
RP74448GL	Brizo	7" Linear Square Wall Mount Shower Arm And Flange - Luxe Gold	N/A
81986-GL-2.5	Brizo	14" Linear Square Raincan, 2.5 Gpm - Luxe Gold	96
RP48985GL	Brizo	6" Ceiling Mount Shower Arm And Round Flange - Luxe Gold	98
88767-GL	Brizo	Allaria Multi Function Slide Bar Handshower - Luxe Gold	100
K-9136-BV	Kohler	Clearflo Square Design Tile In Shower Drain - Vibrant Brushed Bronze	102
K-78080-O	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	105
K-21710-L-BV	Kohler	Reach Left Hand Trip Lever - Vibrant Brushed Bronze	108

BATH 2 (FULL TILED SHOWER)

65067LF-GLCL-ECO	Brizo	Allaria 1 Hole Deck Mount Lavatory 1.2 Gpm Side Handle - Luxe Gold / Clear Acrylic	113
RP72414GL	Brizo	Push Button Pop Up With Overflow - Luxe Gold	114
K-20000-O	Kohler	Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White	115
T60P006-GLLHP	Brizo	Kintsu Pressure Balance Valve Only Trim Less Handle - Luxe Gold	118
HL60P67-GL	Brizo	Allaria Pressure Balance Trim Handle Kit Twist Lever - Luxe Gold	N/A
R60000-UNBX	Brizo	Multichoice Universal Tub / Shower Rough	119
87380-GL	Brizo	5" Linear Square Single Function Wall Mount Showerhead - Luxe Gold	120
RP74448GL	Brizo	7" Linear Square Wall Mount Shower Arm And Flange - Luxe Gold	N/A
K-9136-BV	Kohler	Clearflo Square Design Tile In Shower Drain - Vibrant Brushed Bronze	121
K-78080-O	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	124
K-21710-L-BV	Kohler	Reach Left Hand Trip Lever - Vibrant Brushed Bronze	127

BATH 3 (FULL TILED SHOWER)

65067LF-GLCL-ECO	Brizo	Allaria 1 Hole Deck Mount Lavatory 1.2 Gpm Side Handle - Luxe Gold / Clear Acrylic	132
RP72414GL	Brizo	Push Button Pop Up With Overflow - Luxe Gold	133
K-20000-O	Kohler	Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White	134
T60P006-GLLHP	Brizo	Kintsu Pressure Balance Valve Only Trim Less Handle - Luxe Gold	137
HL60P67-GL	Brizo	Allaria Pressure Balance Trim Handle Kit Twist Lever - Luxe Gold	N/A
R60000-UNBX	Brizo	Multichoice Universal Tub / Shower Rough	138
87380-GL	Brizo	5" Linear Square Single Function Wall Mount Showerhead - Luxe Gold	139
RP74448GL	Brizo	7" Linear Square Wall Mount Shower Arm And Flange - Luxe Gold	N/A
K-9136-BV	Kohler	Clearflo Square Design Tile In Shower Drain - Vibrant Brushed Bronze	140

K-78080-O	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	143
K-21710-L-BV	Kohler	Reach Left Hand Trip Lever - Vibrant Brushed Bronze	146
BASEMENT (FULL TILED SHOWER)			
65368LF-BNXLHP-ECO	Brizo	Allaria Widespread Lavatory Faucet With Square Spout Less Handles - Brilliance Black Onyx	151
HL5368-BNXBL	Brizo	Allaria Widespread Handle Kit Lever Handle - Brilliance Black Onyx / Matte Black	N/A
RP72414BNX	Brizo	Push Button Pop Up With Overflow - Brilliance Black Onyx	153
K-20000-O	Kohler	Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White	154
T60P006-BNXLHP	Brizo	Kintsu Pressure Balance Valve Only Trim Less Handle - Brilliance Black Onyx	157
HL60P67-BNX	Brizo	Allaria Pressure Balance Trim Handle Kit Twist Lever - Brilliance Black Onyx	N/A
R60000-UNBX	Brizo	Multichoice Universal Tub / Shower Rough	158
87380-BL	Brizo	5" Linear Square Single Function Wall Mount Showerhead - Matte Black	159
RP74448BL	Brizo	7" Linear Square Wall Mount Shower Arm And Flange - Matte Black	160
K-9136-BL	Kohler	Clearflo Square Design Tile Pvc In Shower Drain- Matte Black	161
K-78080-O	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	164
K-21710-L-BL	Kohler	Reach Left Hand Trip Lever - Matte Black	167
SHOWER BASE OPTION			
72331100-O	Sterling Plumbing	Guard+ 60" X 34" Vikrell Shower Base, Center Drain - White	171

VENDOR PART	VENDOR	DESCRIPTION	PAGE
IWS-4-S-GT	The Galley	The Galley Workstation Ideal Workstation 4s With Five Tool Culinary Kit - Graphite Wood Composite	8
IPro750	InSinkErator	Ipro750 3/4hp Garbage Disposer	11
K-11352-BN	Kohler	Disposal Flange With Stopper - Vibrant Brushed Nickel	12

Ideal Workstation. 4S

SPECIFICATIONS

IWS-4-S-QW



Quartered White Oak

IWS-4-S-WA



American Black Walnut

IWS-4-S-GT



Graphite Wood Composite

IWS-4-S-GR



Exclusive Gray Resin*

IWS-4-S-WH



Designer White Resin*


Culinary Tools included (CKT-12)

(1) Upper Deck Section† 12' x 19" UD-12-I-xx	(1) Upper Tier Drying Rack 12 1/4" x 18" DR-12-U-xx	(1) Upper Tier Cutting Board 12 1/4" x 18" CB-12-U-xx	(2) Lower Tier Platforms 12 1/4" x 17" P1-12-L-xx	(1) SS Colander 11" 7.2-qt C1-11-O-ST	(1) SS Mixing Bowl 11" 7.2-qt B1-11-O-ST

†The Upper Deck requires a 1/4" clearance below the surface of the countertop. If the countertop thickness is 3/4" or less, Walnut or White Oak Upper Deck sections will not have the clearance to function above the Upper Tier Culinary Tools.

Upper Deck. & citrine.


Cover set UD-4-2P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin



24"



24"



(1) 12"

Included in CKT

citrine care

CIT-09-SS-C

Stainless Steel
Clean + Polish 9 oz

CIT-17-SS-S

Stainless Steel Spray
+ Refresh 17 oz

CIT-09-WD-C

Wood Condition
+ Protect 9 oz

CIT-04-WD-B

Wood Finishing
Balm 4 oz


THE GALLEY®

Specifications


Single bowl
Users: 1
Culinary Tools included: Five
Galley Tap recommended: One
Outside dimensions: 45 1/2" x 19 1/2" x 10 5/16"
Interior dimensions: 44" x 17" x 10"
Countertop cutout: 44 1/2" x 18"
Basin area: 44" x 16"
Minimum cabinet size: 48" or 120cm

Basin (KSO-4-S-SS)

16GA 316L stainless steel indoor/outdoor
SilentArmor™ sound reduction technology
Angel finish
Three tier design
Star™ groove pattern
Reversible side drain
Drain cover included
Limited Lifetime Warranty
Made in the USA
ASME A112.19.3/CSA B45.4 certified
cUPC™ certified



Center Galley Tap holes 2" from the back of the 18" countertop cutout




Customize Your Galley

Add 7-12" length
Add 1-6" length
Add 18" DryDock
Add 12" DryDock
Apron front

9" depth
Center drain
WorkTop™
*Color coded labels available

Recommended Basin Accessories & G4

Bottom Grate set BG-4-S-2-SS Stainless Steel



Strainer M-DRN-MSS
Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS
Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob



A-DRN-MSS shown



Disposal G4-WD-125



Ideal Workstation. 4S

THE GALLEY®

Tap Hole Specifications

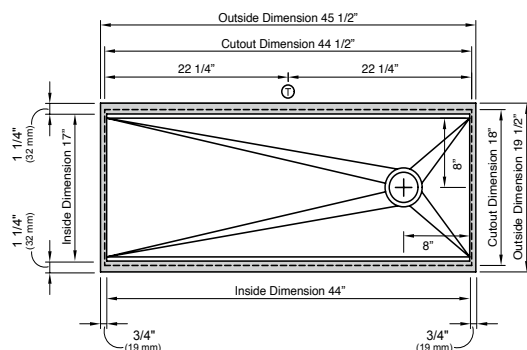

SUGGESTED GALLEY TAP PLACEMENT GUIDE

SUGGESTED GALLEY TAP PLACEMENT GUIDE
Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customer care@thegalley.com for additional guidance on Tap and Tap Accessory placement

Countertop Cutout Plan

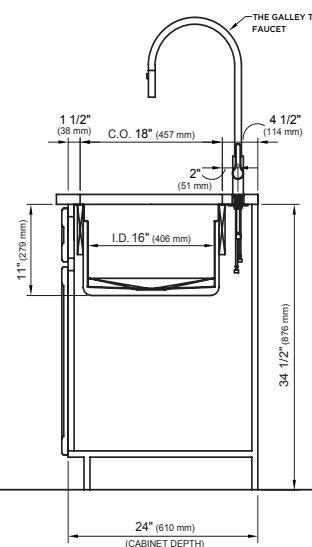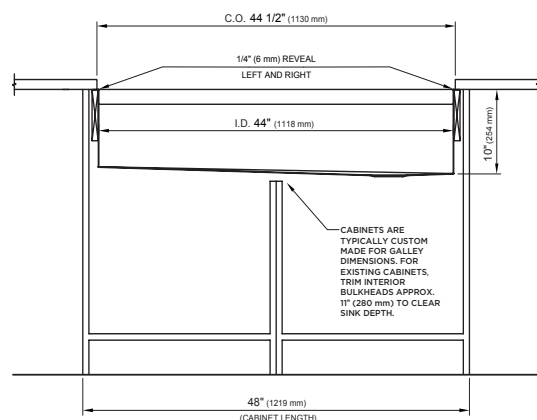

STAINLESS STEEL COMPLIANCE ASME A112.19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:
TheGalley.com/specification-library



Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255

Ideal Workstation. 4S

SPECIFICATIONS | Left Hand Drain Orientation

THE GALLEY®

Tap Hole Specifications

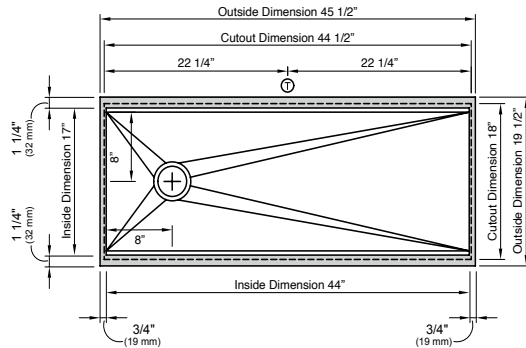

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter



Center Tap hole diameters 2" behind cutout

Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customer@thegalley.com
for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

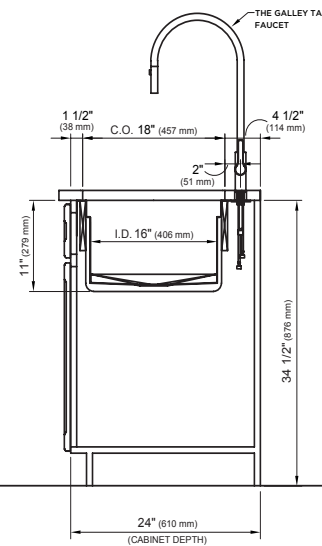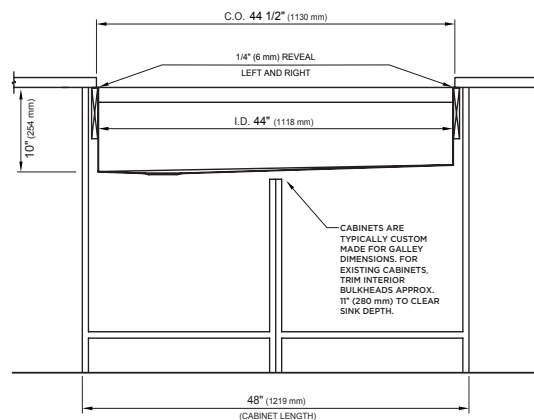

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:
TheGalley.com/specification-library

Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255



Food Waste Disposers



PRO SERIES®

PRO 750®

Submittal Sheet


Perfect for small households or restricted cabinet space.

- **SoundSeal®** technology delivers quiet performance versus a standard disposer.
- **MultiGrind®** technology delivers 2 stages of grind vs. 1 stage in standard disposer.
- Includes sound-reducing **Quiet Collar®** Sink Baffle containing antimicrobial material.
- Assembled in USA exclusively for professional plumbing contractors.

Specifications

Type of Feed	Continuous
On/Off Control	Wall Switch
Motor	Single Phase
HP	3/4
Reversing	Auto-Reverse Grind System® feature
Volts	120
HZ	60
RPM	1725
Amp. (Avg. Load)	9.52
Time Rating	Intermittent
Lubrication	Permanently Lubricated Upper & Lower Bearings
Shipping Weight (Approx.)	19.2 lbs.
Unit Finish	Black Enamel Black
Overall Height	12-1/4"
SoundSeal Plus Technology	Anti-Vibration Mount® Anti-Vibration Tailpipe Mount™ Antimicrobial Quiet Collar® Sink Baffle SoundLimiter™ Insulation
MultiGrind Technology	GrindShear Ring®
Grind Chamber Capacity	34.6 oz.
Motor Protection	Manual Reset Overload
Average Water Usage	Approx. 1 Gallon Per Person Per Day
Average Electrical Usage	3-4 KWh Per Year
Drain Connection	1-1/2" Anti-Vibration (Hose Clamp)
Dishwasher Drain Connection	Yes

Dimensions

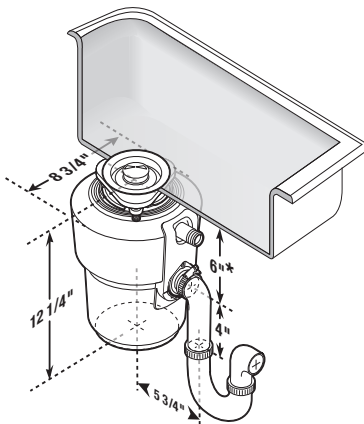

* Add 1/2" when stainless steel sinks are used.

Sample Specification

Food Waste Disposer(s) shall be InSinkErator Model PRO 750® with MultiGrind® and SoundSeal® technologies, 3/4 HP motor, Auto-Reverse Grind System® feature and Stainless Steel Grind components.

Warranty:

We Come To You® 9-Year In-Home Limited Warranty.

* The complete InSinkErator warranty is included in the Care & Use Booklet packed with each unit.



Food waste is roughly 80% water. By using your disposal regularly, you can help divert food waste from landfills and reduce greenhouse gas emissions. Make sustainability a family affair by using your disposal. After all, the smallest changes can make the biggest impact.

Job Specifications



The Emerson logo is a trademark and service mark of Emerson Electric Co. The mounting collar configuration is a trademark of Emerson Electric Co. Quick Lock® is a registered trademark of Emerson Electric Co.

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.



1-800-558-5700
www.insinkerator.com

KOHLER®

K-11352

Disposal flange with stopper

Features

- Fits standard garbage disposal units 4-1/2" (114 mm) wide and 1-5/8" (41 mm) deep
- Includes disposal flange and stopper
- Fits standard garbage disposal units 4-1/2" (114 mm) wide and 1-5/8" (41 mm) deep



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BS	Brushed Stainless
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
BGP	Vibrant Brushed Graphite
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 17:58 - US-CA

THE BOLD LOOK
OF **KOHLER**®

KOHLER

K-11352
Disposal flange with stopper

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 17:58 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

K-11352
Disposal flange with stopper

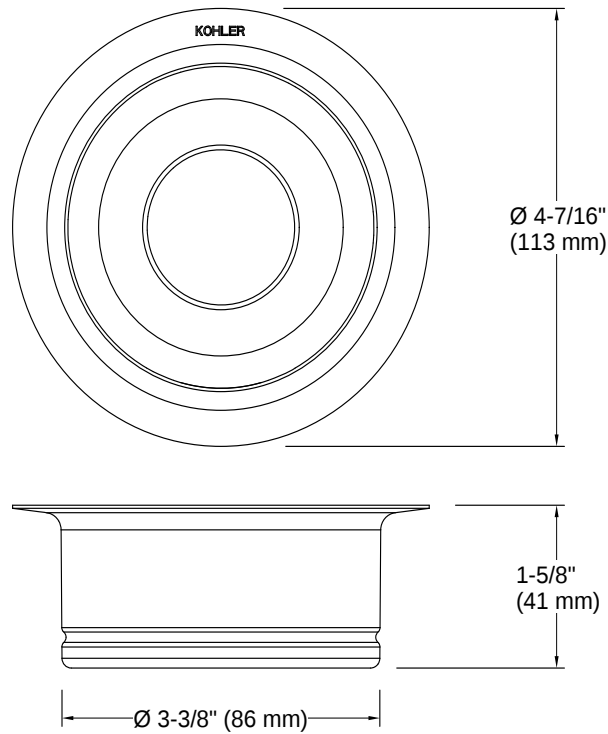

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 17:58 - US-CA

THE BOLD LOOK
OF **KOHLER**

3

VENDOR PART	VENDOR	DESCRIPTION	PAGE
IWTF-D-YSS-HF	The Galley	The Galley Tap Ideal Tap High Flow And Water Filtration System - Pvd Brushed Gold	16
ISD-1-YSS	The Galley	The Galley Tap Ideal Soap Dispenser - Pvd Brushed Gold	17
IDS-1-YSS	The Galley	The Galley Tap Ideal Deck Switch - Pvd Brushed Gold	18

Ideal Tap

High Flow (HF) or Eco Flow (EF)



Specifications


- Single-lever control ceramic disk cartridge
- Forward rotating COMFORTFEEL™ lever handle
- 11" CENTERSTATION™ spout projection
- 11" Pot fill height from deck to spout outlet
- Hand spray extends up to 26" from spout
- Q-Dock™ docking system holds hand spray in place
- Ergonomic slide switch to select Ideal Flow. Laminar or Spray Flow
- Automatic return to laminar flow
- Concealed easy clean spray face
- Spout rotates 360°
- Quiet, smooth gliding hose
- Counterweight
- Dual check valves
- 24" stainless steel flexible hoses 3/8" compression
- Maximum counter thickness 2"
- Minimum install hole diameter 1 3/8"
- Optional base ring included
- Total height 21 1/4"
- High Flow 2.2 GPM maximum flow rate
- Eco Flow 1.8 GPM maximum flow rate
- For use with Water Filtration System* (not included)
- *Note: May reduce water flow

Construction

- Solid 316L machined stainless steel construction
- Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Burnished Bronze
- Indoor & outdoor
- Limited Lifetime Warranty
- Made in Italy

Codes/Standards

- ASME 112.18.1
- CSA B125.1
- NSF 61, 372
- CALGreen
- cUPC™
- ADA

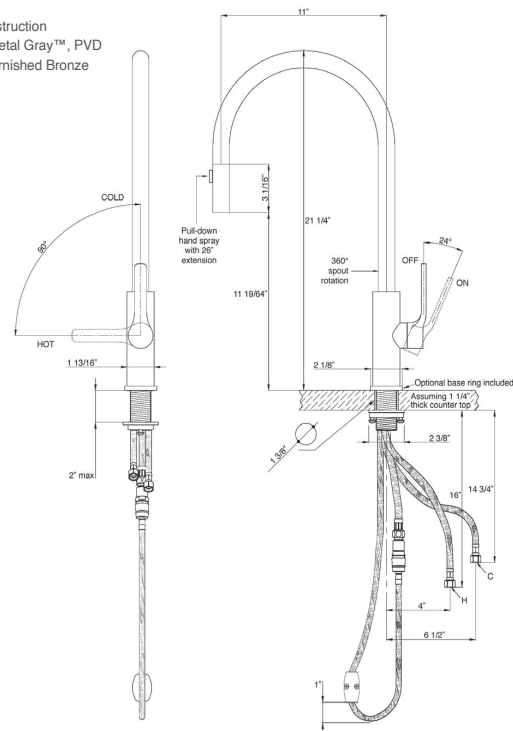

Ideal Soap Dispenser




Specifications

Heavy-duty pump for added reliability
5 1/2" reach
5 1/2" clearance
Easy refill from the top
12 fluid ounce capacity
Maximum counter thickness 1 9/16"
Install hole diameter 1" min to 1 3/8" max

Construction

Solid 316L machined stainless steel construction
Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Rose Gold
Indoor & outdoor
Limited Lifetime Warranty
Made in Italy

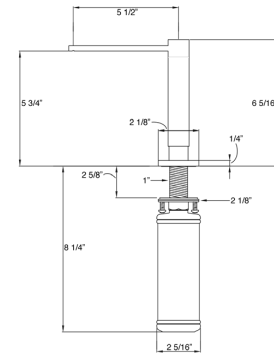

Ideal Deck Switch

IDS-1-PSS	IDS-1-MSS	IDS-1-GSS	IDS-1-BSS	IDS-1-YSS	IDS-1-ZSS
					
Polished Stainless Steel	Matte Stainless Steel	PVD Gun Metal Gray™ Stainless Steel	PVD Satin Black Stainless Steel	PVD Brushed Gold Stainless Steel	PVD Burnished Bronze Stainless Steel

Specifications



Air-activated button
Above the deck design for easy operation
Convenient alternative to a wall switch
Isolated from the electrical connections
Includes tubing and two outlet control box for disposal and a hot tank 120v 15amp
Maximum counter thickness 2 11/16"
Minimum install hole diameter 1 3/8"

Construction

Solid 316L machined stainless steel construction
Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Burnished Bronze
Indoor & outdoor
Limited Lifetime Warranty
Made in Italy

Codes/Standards

UL
CSA Enclosure Type 2
ADA Compliant

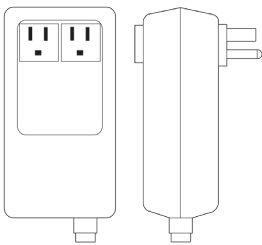

Appliance Control Box
4 3/8"H x 3"W x 1 3/4"D
120v 15Amp 1Hp

VENDOR PART	VENDOR	DESCRIPTION	PAGE
K-28669-9-2MB	Kohler	Billet Pull Down Kitchen Sink Faucet With Two Function Sprayhead - Vibrant Brushed Moderne Brass	20
K-28676-2MB	Kohler	Billet Beverage Faucet - Vibrant Brushed Moderne Brass	23
K-28679-2MB	Kohler	Billet Soap / Lotion Dispenser - Vibrant Brushed Moderne Brass	26
K-35724-2MB	Kohler	Garbage Disposal Air Switch Kit - Vibrant Brushed Moderne Brass	29

KOHLER®

Billet® | K-28669-9

Pull-down kitchen sink faucet with two-function sprayhead

Features

- Two-function pull-down sprayhead with touch control allows you to switch between aerated and Sweep® sprays
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean
- DockNetik® secure docking system locks sprayhead into place when not in use
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- High-arch spout offers vertical clearance for tall cookware and pitchers
- Single round handle makes adjusting water temperature easy with one hand
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- KOHLER ceramic disc valves exceed industry longevity standards by over two times, ensuring durable performance for life
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- Coordinates with other products in the Billet™ collection



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
VS	Vibrant Stainless
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
BMB	Matte Black with Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 19:59 - US-CA

THE BOLD LOOK
OF **KOHLER**®

KOHLER

Billet® | K-28669-9

Pull-down kitchen sink faucet with two-function sprayhead

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Handle

Handle Style/ Type: Lever

Spout

Spout Reach: 9-3/16" (233 mm)

Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-28676 Beverage faucet

K-28679 Soap/lotion dispenser

K-28675-9 Single-handle bar sink faucet with two-function extended-reach spout and side sprayer

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.


5-12-2026 19:59 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Billet® | K-28669-9

Pull-down kitchen sink faucet with two-function sprayhead

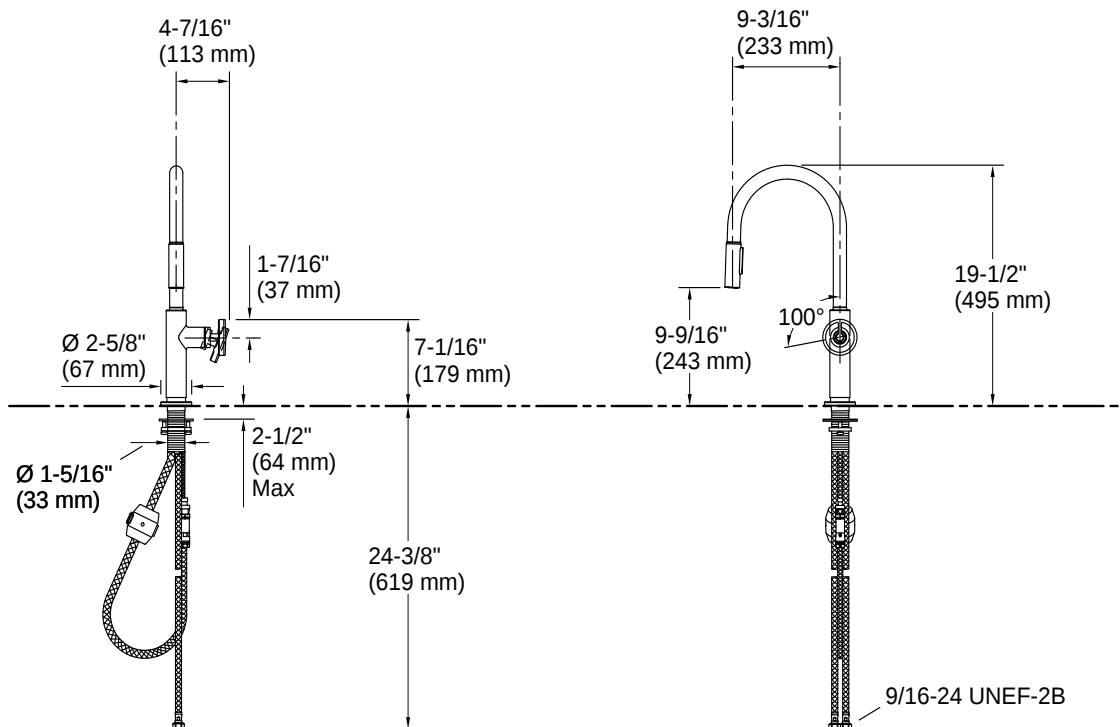

Installation

- For single-hole installation
- Flexible supply lines simplify installation

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:59 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

Billet® | K-28676

Beverage faucet

Features

- Works with KOHLER filtration systems or as a cold water tap
- Integrated air gap offers reverse osmosis (RO) compatibility
- Faucet spout rotates 360° and offers clearance for filling glasses and pitchers
- Right-side lever handle
- KOHLER ceramic disc valves exceed industry longevity standards by over two times, ensuring durable performance for life
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- Coordinates with other products in the Billet™ collection



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|-----|--|
| CP | Polished Chrome |
| SN | Vibrant Polished Nickel |
| AF | Vibrant French Gold |
| VS | Vibrant Stainless |
| BV | Vibrant Brushed Bronze |
| BL | Matte Black |
| 2MB | Vibrant Brushed Moderne Brass |
| BMB | Matte Black with Brushed Moderne Brass |
| TT | Vibrant Titanium |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 19:59 - US-CA

THE BOLD LOOK
OF **KOHLER**®

KOHLER

Billet® | K-28676

Beverage faucet

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651

Technical Information

All product dimensions are nominal.

Handle

Handle Style/ Type: Lever

Spout

Spout Reach: 5-5/16" (135 mm)

Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-22155 Reverse osmosis (RO) water filtration system

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 19:59 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Billet® | K-28676

Beverage faucet

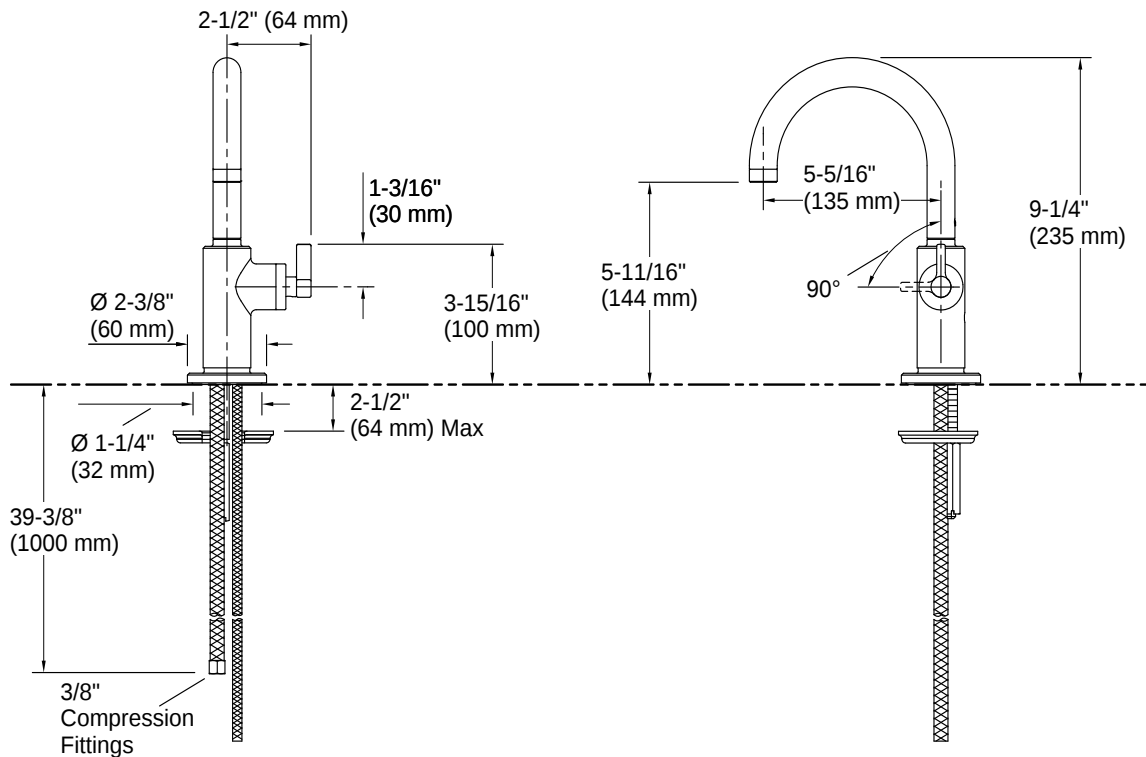

Installation

- Single-hole installation

Installation Notes

Install this product according to the installation instructions.

ADA compliant for faucet handles only

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:59 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

Billet® | K-28679

Soap/lotion dispenser

Features

- Holds up to 16 ounces of soap or lotion; refillable from top
- Greater thread length is suitable for use with thicker countertops
- Coordinates with other products in the Billet™ collection



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:59 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Billet® | K-28679

Soap/Lotion dispenser

Codes/Standards

None Applicable

Material

- Premium material construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.


5-12-2026 19:59 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Billet® | K-28679

Soap/Lotion dispenser

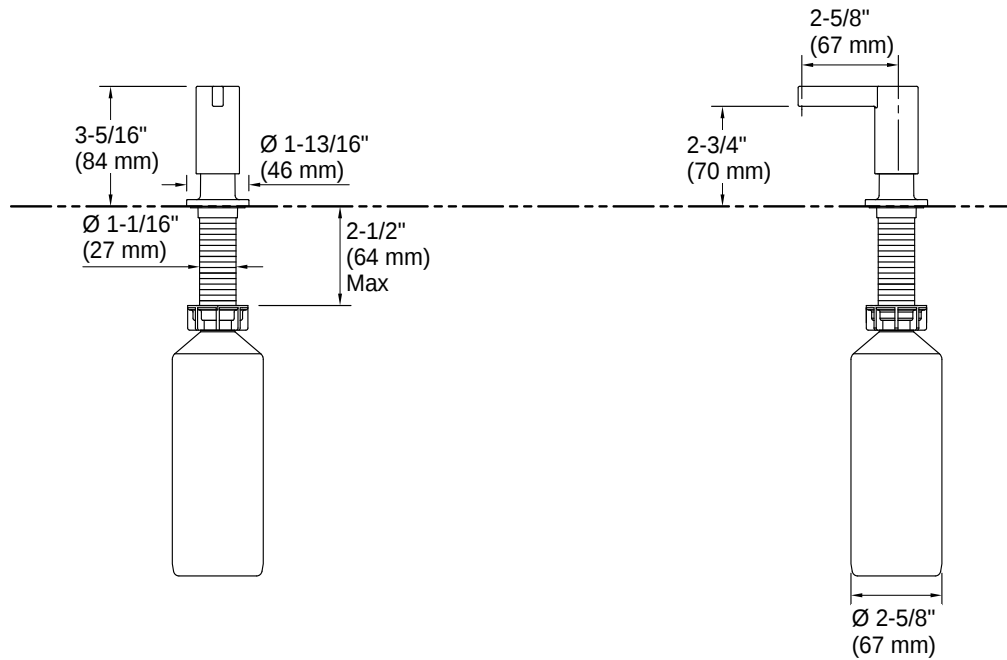

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:59 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

K-35724

Garbage disposal air switch kit

Features

- Compatible with standard garbage disposals
- Air switch easily mounts to your sink or countertop
- Provides a decorative alternative to conventional wall-mount toggle switch
- Coordinates with contemporary-style faucets
- Electrical box comes standard with two outlets



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|-----|-------------------------------|
| CP | Polished Chrome |
| SN | Vibrant Polished Nickel |
| AF | Vibrant French Gold |
| VS | Vibrant Stainless |
| BV | Vibrant Brushed Bronze |
| BL | Matte Black |
| 2MB | Vibrant Brushed Moderne Brass |
| TT | Vibrant Titanium |
| BGP | Vibrant Brushed Graphite |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 20:30 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

K-35724

Garbage disposal air switch kit

Codes/Standards

None Applicable

Material

- Premium material construction for durability and reliability
 - Durable finishes engineered to last and designed to match with KOHLER faucet finishes
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.


5-12-2026 20:30 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

K-35724

Garbage disposal air switch kit

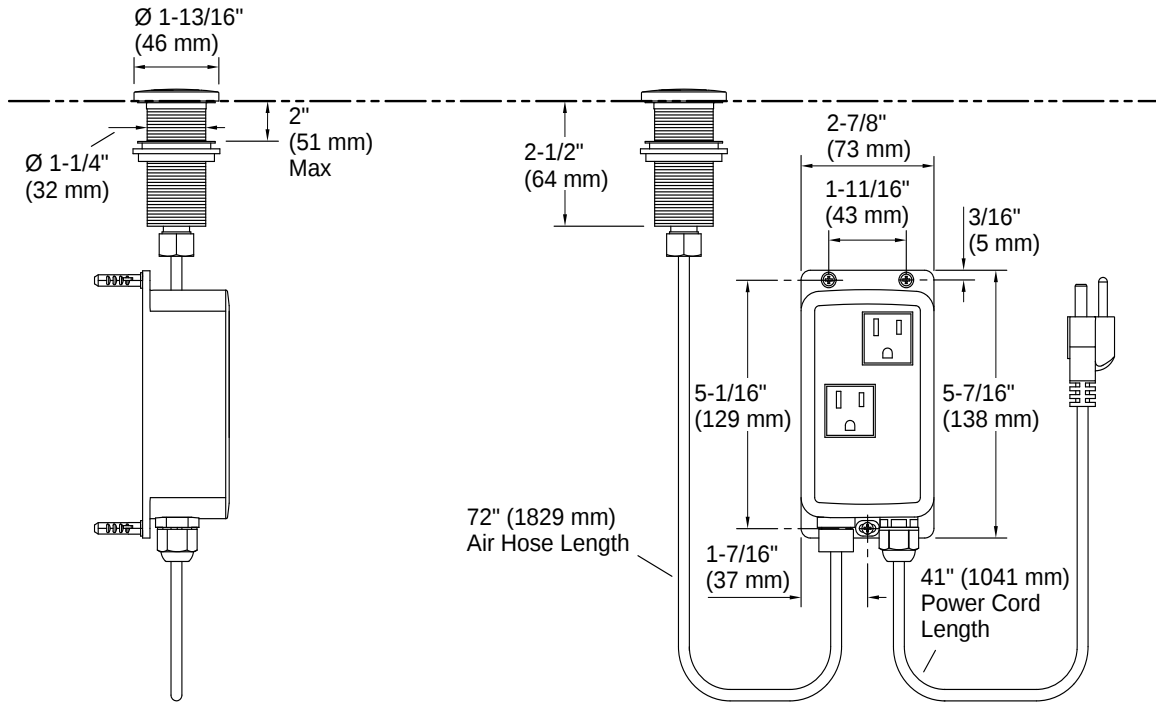

Installation

- Deck-mount / undercounter

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 20:30 - US-CA

THE BOLD LOOK
OF **KOHLER**

3

VENDOR PART	VENDOR	DESCRIPTION	PAGE
ELG1616BK0	Elkay	Quartz Classic 15 3/4" X 15 3/4" X 7 11/16" Single Bowl Dual Mount Bar Sink - Black	33
1959LF-BL	Delta	Trinsic True Bar Limited Swivel - Matte Black	35
IPro750	InSinkErator	IPro750 3/4HP Garbage Disposer	37
K-11352-BL	Kohler	Disposal Flange With Stopper - Matte Black	38
MT951/MB	Mountain Plumbing Products	Round Classic Waste Disposer Air Switch With Direct Plug-In - Matte Black	41

ELKAY[®]

SPECIFICATIONS

Quartz Classic® 15-3/4" x 15-3/4" x 7-11/16" Single Bowl Dual Mount Bar Sink

Model(s) ELG1616

PRODUCT SPECIFICATIONS

Quartz Classic® 15-3/4" x 15-3/4" x 7-11/16" Single Bowl Dual Mount Bar Sink. Sink is molded with up to 80% natural quartz and high performance acrylic resins that are non-porous providing superior heat, scratch, fade and stain resistance. Naturally sound deadening and Rear Center drain placement.



Installation Type:	Drop-in, Undermount
Material:	Quartz
Finish:	Black (BK), Graphite (GT), Greystone (GS), Matte Black (MB), White (WH)
Number of Bowls:	1
Sink Dimensions:	15-3/4" x 15-3/4" x 7-11/16"
Bowl 1 Dimensions:	13-1/8" x 13-1/8" x 7-11/16"
Drain Size:	3-1/2" (89mm)
Drain Location:	Rear Center
Minimum Cabinet Size:	21"
Mounting Hardware:	Part # 64090404 included for drop-in installation for countertops up to 1-3/4" (44mm) thick. Part # 54300404 included for undermount installation.
Template Included:	Yes
Cutout Template #:	1000003495 undermount 1000003497 topmount

Template is available for download at [elkay.com](#). CAD software will be required to open the template.

Cutout Dimensions for Drop-in Installation:

15-1/8" x 15-1/8" (384mm x 384mm) with 3/8" (10mm) corner radius



Graphite (GT)



Greystone (GS)



Matte Black (MB)



White (WH)

A Century of Tradition and Quality. For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.



Product Compliance: CSA B45.8/IAPMO Z403




Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.

[Clean and Care Manual \(PDF\)](#)

[Installation Instructions \(PDF\) - 1000005238](#)

[Warranty \(PDF\)](#)

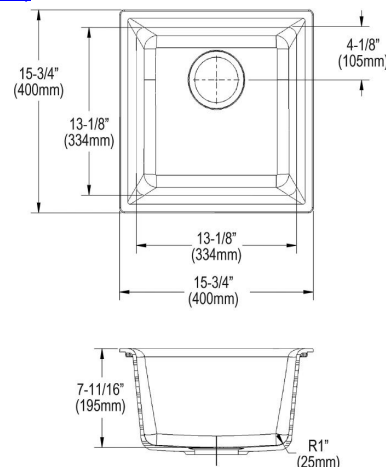

PART: _____ QTY: _____

PROJECT: _____

CONTACT: _____

DATE: _____

NOTES: _____

APPROVAL: _____


In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](#) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked. Latest version of the spec sheet available: https://www.elkayfiles.com/spec-sheets/ELG1616_spec.pdf

ELKAY[®]

SPECIFICATIONS

Quartz Classic® 15-3/4" x 15-3/4" x 7-11/16" Single Bowl Dual Mount Bar Sink Model(s) ELG1616


Installation Profile:

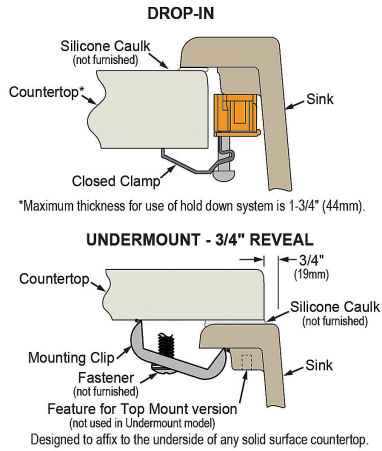

Optional Accessories

LKOBG1616SS	Stainless Steel 11-1/2" x 11-1/2" x 1" Bottom Grid Spec Sheet (PDF)	
LK99	Deluxe 3-1/2" Drain Type 304 Stainless Steel Body Strainer Basket Rubber Seal and Tailpiece Spec Sheet (PDF)	
LKQD35	Polymer 3-1/2" Disposer Flange with Removable Basket Strainer and Rubber Stopper Spec Sheet (PDF)	
LKQS35	Polymer 3-1/2" Drain Fitting with Removable Basket Strainer and Rubber Stopper Spec Sheet (PDF)	
LKWRB1209SS	Stainless Steel 8" x 11" x 7" Rinsing Basket Spec Sheet (PDF)	
LKQD35	Polymer 3-1/2" Disposer Flange with Removable Basket Strainer and Rubber Stopper Spec Sheet (PDF)	
LKQS35	Polymer 3-1/2" Drain Fitting with Removable Basket Strainer and Rubber Stopper Spec Sheet (PDF)	

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked. Latest version of the spec sheet available: https://www.elkayfiles.com/spec-sheets/ELG1616_spec.pdf

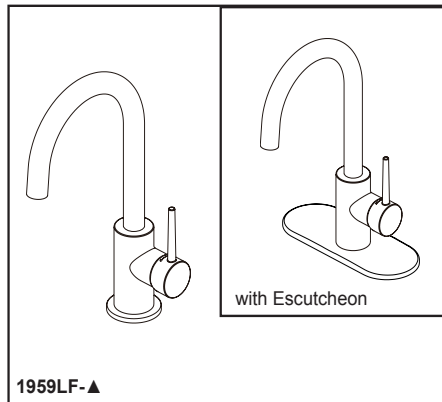

see what Delta can do™

BAR & PREP SINK FAUCETS

- Contemporary Collection
- Single Handle Deck Mount
- 1 or 3 Hole 4" Installation

STANDARD SPECIFICATIONS:


- Max flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa.
- Solid brass fabricated body.
- 120° Rotating spout.
- Hot/Cold logo on handle to indicate temperature.
- Ceramic disc carriage.
- 2 1/2" max deck thickness.
- 5/16" Staggered copper supply lines with 1/2" adapters.
- ADA compliant lever handle.
- Order RP77702 for optional escutcheon.
- Order RP1001 for coordinating soap dispenser.

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ICC/ANSI A117.1

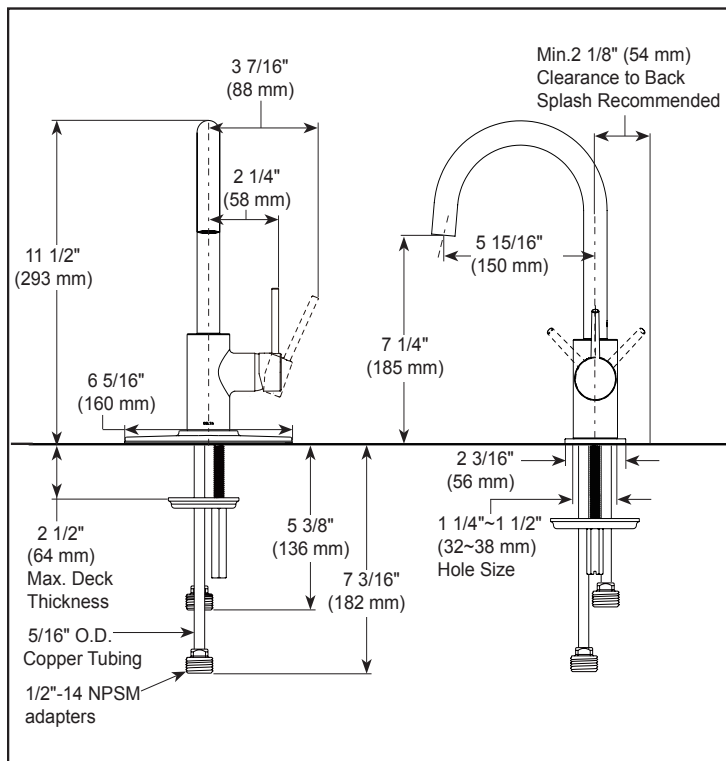


▲ Designate proper finish suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company

DSP-K-1959LF Rev. E

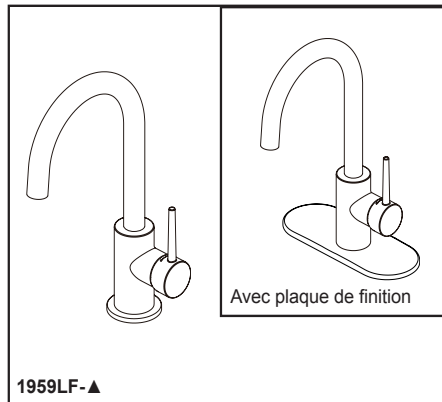

voyez ce que Delta peut faire™

BAR & PRÉPARATION ROBINETS D'ÉVIER

- Collection contemporaine
- Poignée unique, installation sur le comptoir
- Installation de 4 po (102 mm) à 1 ou 3 trous

SPÉCIFICATIONS STANDARDS :


- Débit maximal 1,8 gal./min à 60 psi, 6,8 L/min à 414 kPa.
- Corps fabriqué de laiton massif.
- Bec pivotant à 120°.
- Logo chaud/froid sur la poignée pour indiquer la température.
- Cartouche à disque en céramique.
- Épaisseur maximale du comptoir 2 1/2 po (6,4 cm).
- Tuyaux d'alimentation en cuivre décalés de 5/16 po (8 mm) avec adaptateurs de 1/2 (13 mm).
- Poignée de type levier conforme à l'ADA.
- Commander RP77702 pour la plaque de finition en option.
- Commander RP1001 pour le distributeur de savon assorti.

GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter le site fr.deltafaucet.ca pour tous les détails de notre garantie limitée.

CONFORME À :

- ASME A112.18.1 / CSA B125.1
- ICC / ANSI A117.1

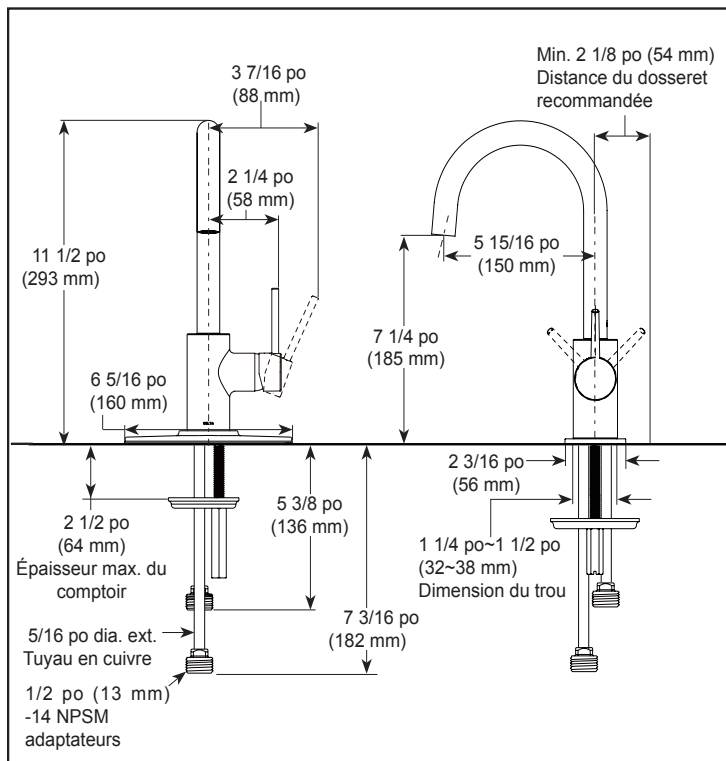

▲ Désigner le suffixe de finition approprié

Delta Faucet Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.deltafaucet.ca pour les options de finition et la disponibilité des produits.

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company



Food Waste Disposers



PRO SERIES®

PRO 750®

Submittal Sheet


Perfect for small households or restricted cabinet space.

- **SoundSeal®** technology delivers quiet performance versus a standard disposer.
- **MultiGrind®** technology delivers 2 stages of grind vs. 1 stage in standard disposer.
- Includes sound-reducing **Quiet Collar®** Sink Baffle containing antimicrobial material.
- Assembled in USA exclusively for professional plumbing contractors.

Specifications

Type of Feed	Continuous
On/Off Control	Wall Switch
Motor	Single Phase
HP	3/4
Reversing	Auto-Reverse Grind System® feature
Volts	120
HZ	60
RPM	1725
Amp. (Avg. Load)	9.52
Time Rating	Intermittent
Lubrication	Permanently Lubricated Upper & Lower Bearings
Shipping Weight (Approx.)	19.2 lbs.
Unit Finish	Black Enamel Black
Overall Height	12-1/4"
SoundSeal Plus Technology	Anti-Vibration Mount® Anti-Vibration Tailpipe Mount™ Antimicrobial Quiet Collar® Sink Baffle SoundLimiter™ Insulation
MultiGrind Technology	GrindShear Ring®
Grind Chamber Capacity	34.6 oz.
Motor Protection	Manual Reset Overload
Average Water Usage	Approx. 1 Gallon Per Person Per Day
Average Electrical Usage	3-4 KWh Per Year
Drain Connection	1-1/2" Anti-Vibration (Hose Clamp)
Dishwasher Drain Connection	Yes

Dimensions

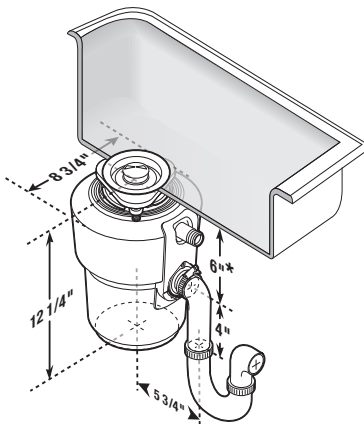

* Add 1/2" when stainless steel sinks are used.

Sample Specification

Food Waste Disposer(s) shall be InSinkErator Model PRO 750® with MultiGrind® and SoundSeal® technologies, 3/4 HP motor, Auto-Reverse Grind System® feature and Stainless Steel Grind components.

Warranty:
We Come To You® 9-Year In-Home Limited Warranty.

* The complete InSinkErator warranty is included in the Care & Use Booklet packed with each unit.



Food waste is roughly 80% water. By using your disposal regularly, you can help divert food waste from landfills and reduce greenhouse gas emissions. Make sustainability a family affair by using your disposal. After all, the smallest changes can make the biggest impact.

Job Specifications



The Emerson logo is a trademark and service mark of Emerson Electric Co. The mounting collar configuration is a trademark of Emerson Electric Co. Quick Lock® is a registered trademark of Emerson Electric Co.

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.



1-800-558-5700
www.insinkerator.com

KOHLER®

K-11352

Disposal flange with stopper

Features

- Fits standard garbage disposal units 4-1/2" (114 mm) wide and 1-5/8" (41 mm) deep
- Includes disposal flange and stopper
- Fits standard garbage disposal units 4-1/2" (114 mm) wide and 1-5/8" (41 mm) deep



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BS	Brushed Stainless
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
BGP	Vibrant Brushed Graphite
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 17:58 - US-CA

THE BOLD LOOK
OF **KOHLER**®

KOHLER

K-11352
Disposal flange with stopper

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 17:58 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

K-11352
Disposal flange with stopper

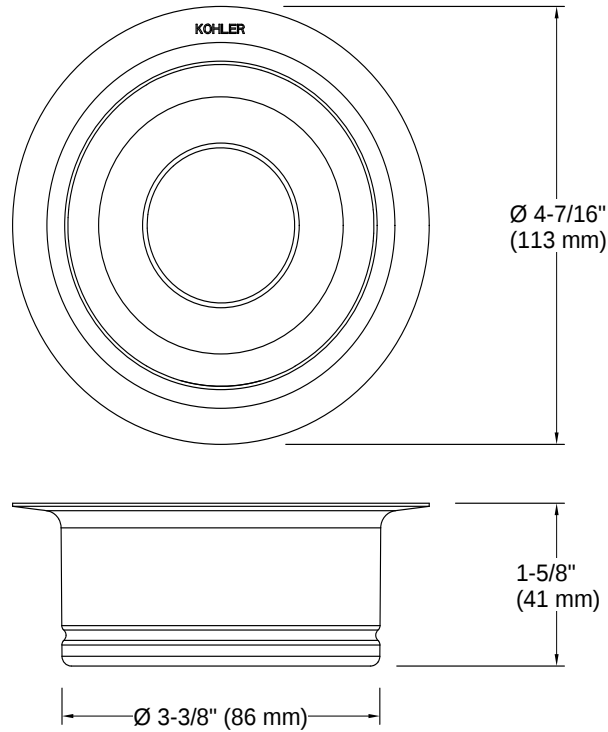

Installation Notes

Install this product according to the installation instructions.




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 17:58 - US-CA

THE BOLD LOOK
OF **KOHLER**

MT951

ROUND "CLASSIC TOUCH" WASTE DISPOSER AIR SWITCH

SPECIFICATION SHEET

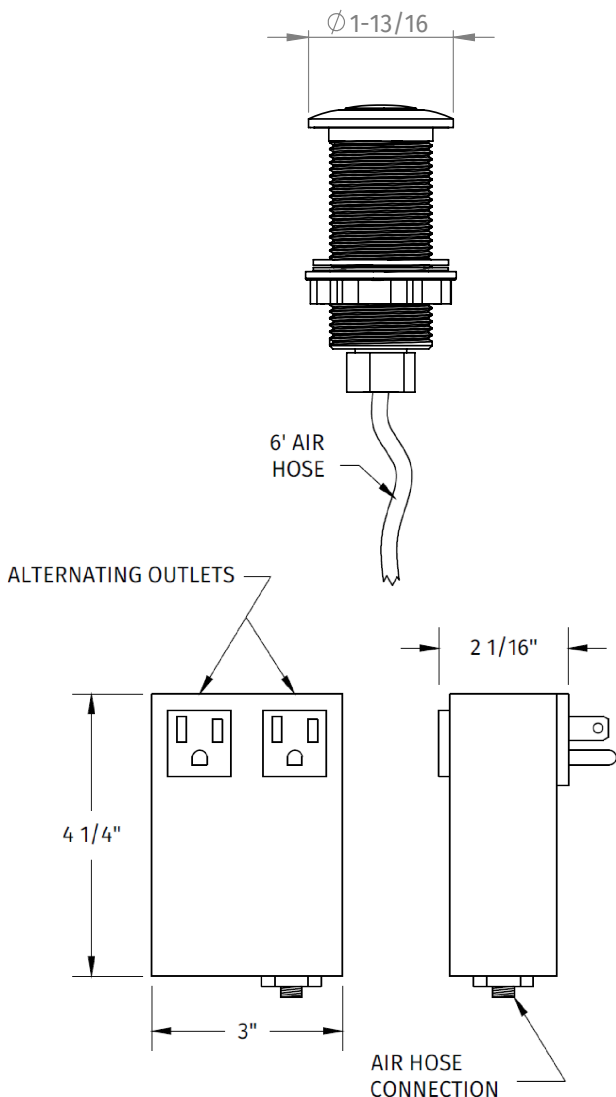

- REQUIRES 1-3/8" MOUNTING HOLE
- WILL FIT UP TO 1-1/2" THICK DECK (FOR THICKER DECKS, THE BUTTON CAN BE INSTALLED WITHOUT THE MOUNTING NUT BY APPLYING 100% SILICONE BENEATH THE FLANGE)
- ETL LISTED
- AIR ACTUATED
- BOX MOUNTING HARDWARE

WARRANTY

FOR WARRANTY INFO PLEASE VISIT WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY

FINISH CARE & MAINTENANCE

NEVER USE ANY HARSH ALKALI, ACID BASED DETERGENTS OR CLEANERS SUCH AS SOFT SCRUB®, SCRUBBING BUBBLES® OR COMET® TO CLEAN. DO NOT USE BRILLO® OR SCOTCH BRITE® PADS. THESE WILL ALL HARM THE FINISH. TO CLEAN, USE ONLY A DAMP SOFT CLOTH AND WIPE GENTLY. STANDARD WINDEX® CAN ALSO BE USED SPARINGLY. IT IS NOT NECESSARY TO WIPE HARD TO REMOVE SPOTS. TO MAINTAIN THE FINISH, WIPE WITH A SOFT DRY CLOTH AFTER USE. AN OCCASIONAL COAT OF PURE CARNAUBA WAX WITHOUT CLEANERS WILL HELP PROTECT THE FINISH.

VENDOR PART	VENDOR	DESCRIPTION	PAGE
FFL1-WH	Fiat	23x22 Laundry Sink W / Legs White	43
K-22035-CP	Kohler	Simplice Pull Out Laundry Sink Faucet With Two Function Sprayhead - Polished Chrome	45

FIAT PRODUCTS

SERV-A-SINK® LAUNDRY TUBS MODELS FL-1, L-1, DL-1

FL-1 FLOOR MOUNTED SERV-A-SINK® L-1 WALL HUNG SERV-A-SINK® DL-1 DROP-IN SERV-A-SINK®

Fiat Products uses a specialized SMC process (Molded Stone®) to manufacture all laundry tubs. Moldings are manufactured in matched metal dies under heat and pressure resulting in a homogeneous molded unit. Drain(s) with stopper(s) are furnished as standard equipment. Capacity shall be 76 litres (17 Imp gal) for the single tub sink and 152 litres (33 Imp gal) for the double tub sink. Laundry sinks available in white only.

- All single compartment laundry tubs are available in sixpacks (L-6 and FL-6) and bulk quantities.
- All products must be installed in accordance with installation instructions provided. Failure to do so may invalidate warranty at manufacturer's discretion.

FL-1 Floor Mounted Serv-A-Sink®

- White baked enamel angle legs that slip into molded sockets for rigid, friction-fit. (Included)
- Easy leveling devices are provided for fast, even planing. Tub is capable of handling 600 pounds.

Nominal Dimensions:

20-1/4" x 17-1/4" x 13" (514 x 438 x 330mm)
34-3/4" (883mm) CSA Approved

L-1 Wall Hung Serv-A-Sink®

- Heavy gauge galvanized - steel bracket capable of withstanding 600 pounds. (Included)
- Side fillers and bottom tub support, which are assembled in field to the mounting brackets, are made of white molded plastic polymer.

Nominal Dimensions:

20-1/4" x 17-1/4" x 13" (514 x 438 x 330mm)

DL-1 Drop-In Serv-A-Sink®

- Designed for a countertop installation.
- Self-rimming flange, four locking corner bars and screws for fast tightening into integral molded mounting legs and against the underside of the countertop. (Included)

Nominal Dimensions:

22-1/8" x 17" x 12-3/7" (562 x 432 x 324mm)
Underside flange rim sealant for watertightness supplied by others.


All products are UPC listed

Customer Service Canada
1-800-387-0369
www.fiat.ca

© 2016 Fiat Products



FL-1 Floor Mounted Serv-A-Sink®

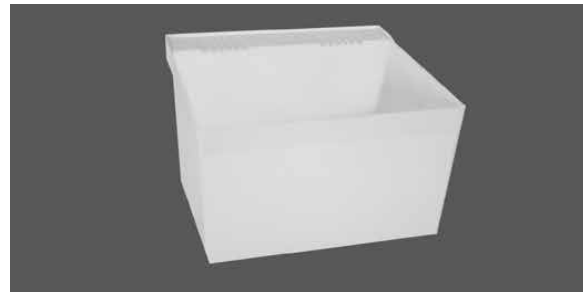

L-1 Wall Hung Serv-A-Sink®



DL-1 Drop-In Serv-A-Sink®

SEE REVERSE FOR ROUGHING-IN DIMENSIONS



FIAT
QUALITY FOR LIFE

Customer Service United States
1-800-442-1902
www.fiatproducts.com


Revised 10/16t

FIAT
PRODUCTS

SERV-A-SINK® LAUNDRY TUBS
MODELS FL-1, L-1, DL-1

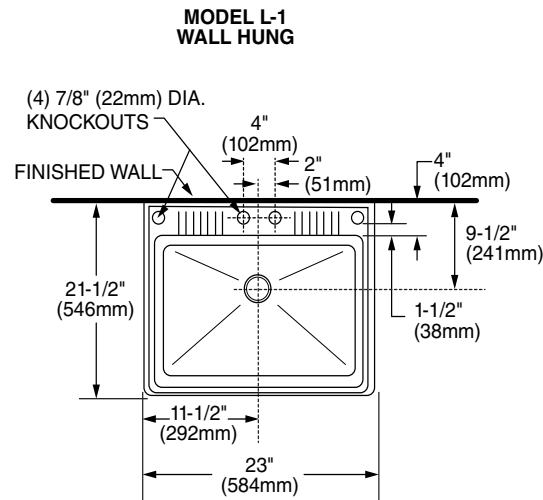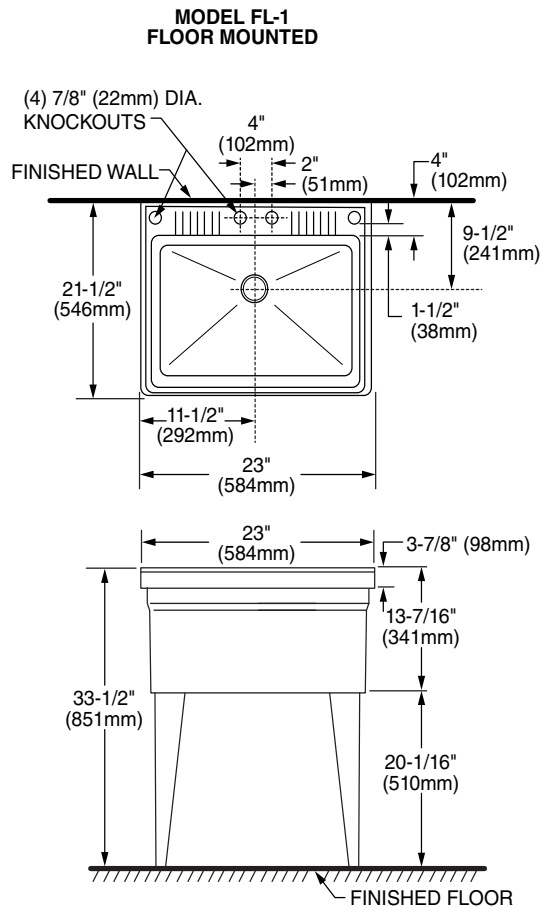

IMPORTANT: Roughing-in dimensions
may vary 1/2" and are subject to change
or cancellation without prior notice.

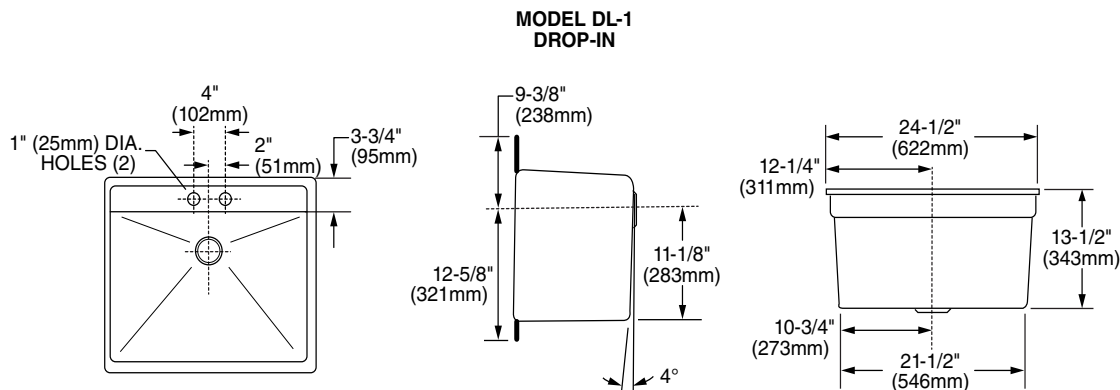

FIAT
QUALITY FOR LIFE

Customer Service Canada
1-800-387-0369
www.fiat.ca

Customer Service United States
1-800-442-1902
www.fiatproducts.com

© 2016 Fiat Products

Revised 10/16


KOHLER®

Simplice® | K-22035

Pull-out laundry and utility sink faucet with two-function sprayhead

Features

- Two-function pull-out sprayhead with touch-control allows you to switch from aerate to Sweep® spray
- Fast flow provides a powerful rise and quickly fills basins and buckets
- Pull-out spout provides flexibility, reaching beyond the sink
- 120° spout rotation offers flexible water containment within sink space
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Single-handle operation facilitates flow and temperature control
- Large spray setting button helps easily transition between spray functions
- 4.0 gpm (15.1 lpm) maximum flow rate at 20 psi (1.3 bar)

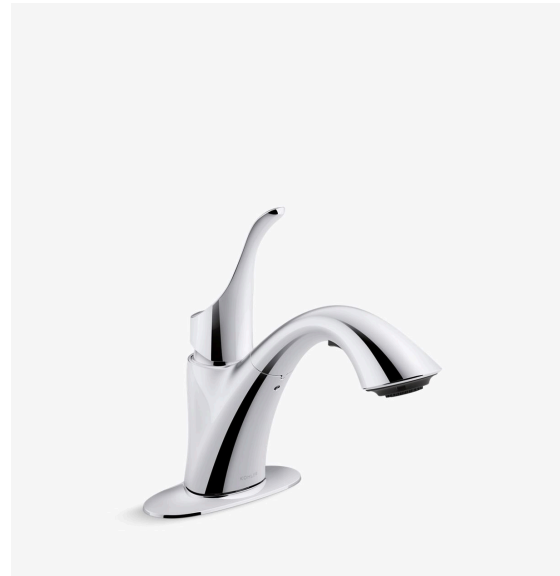

Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- VS Vibrant Stainless
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:20 - US-CA

THE BOLD LOOK
OF **KOHLER®**

1

KOHLER

Simplice® | K-22035

Pull-out laundry and utility sink faucet with two-function sprayhead

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61

Technical Information

All product dimensions are nominal.

Handle

Handle Style/ Type: Lever

Spout

Spout Reach: 8" (204 mm)

Flow Rate

Faucet Flow Rate: 4 gpm (15.1 l/min)

Valves

Included Valves: Ceramic disc, Thermostatic, Volume Control

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:20 - US-CA


THE BOLD LOOK
OF **KOHLER**

2

KOHLER

Simplice® | K-22035

Pull-out laundry and utility sink faucet with two-function sprayhead

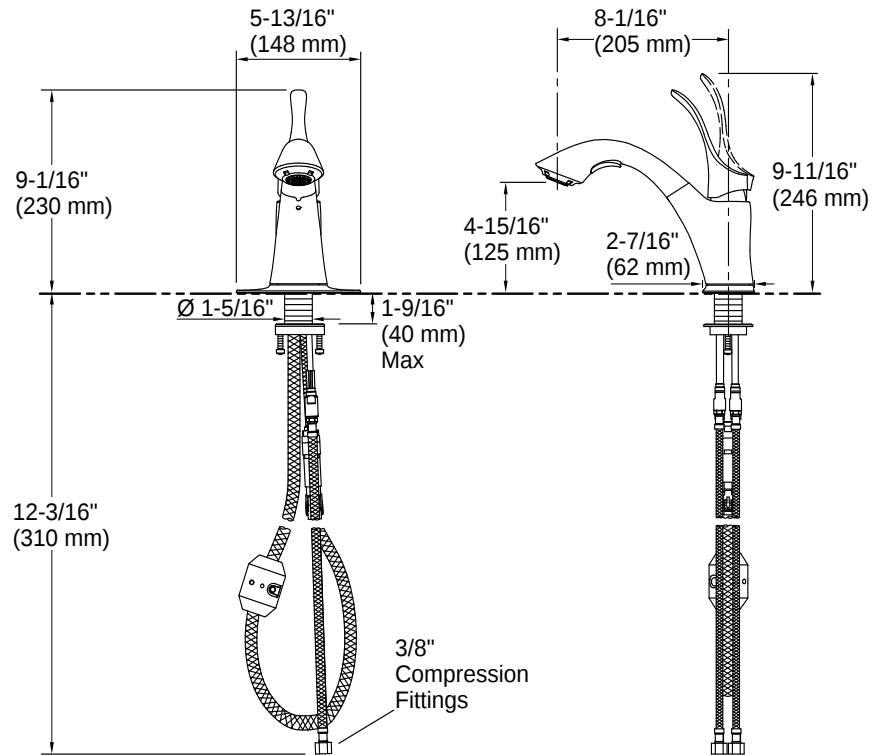

Installation

- Single-hole or three-hole installation (escutcheon available for four-hole installation; sold separately)

Installation Notes

Install this product according to the installation instructions.

Faucet contains all necessary parts for both single-hole and three-hole installations.



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 19:20 - US-CA

THE BOLD LOOK
OF **KOHLER**

VENDOR PART	VENDOR	DESCRIPTION	PAGE
443079	Blanco	Liven Dual Mount Laundry Sink - Soft White	49
63906LF-GLLHP-L	Brizo	Kintsu Pull Down Prep Faucet With Arc Spout Less Handle - Lumicoat Luxe Gold	51
HLK006-GL-L	Brizo	Kintsu Pull Down Faucet Lever Handle Kit - Luxe Gold	N/A
69052-GL	Brizo	Kintsu Flange And Strainer Kitchen - Luxe Gold	53

BLANCO

Sink Specifications

Color	SKU
Truffle	401926
White	401927
Anthracite	401920
Café	401922
Cinder	401923
Metallic Gray	401924
Coal Black	442924
Volcano Gray	443116
Soft White	443079

Design and Planning Tips

- Min cabinet size: 27 in

What is included:

Sink clips

Installation instructions

Cut-out template

Limited Lifetime Warranty

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.

4 additional knock-out holes

Cubed weight: 106 lbs.

Codes & Standards

CSA B45.8-18/ IAPMO Z403-2018




Optional Accessories

Stainless Steel Laundry 234771

Rack

CapFlow Strainer Cover 517666

LIVEN Laundry SILGRANIT



Warranty

BLANCO offers a limited lifetime warranty on all sinks and faucets, as well as a one-year warranty on all custom accessories.

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



View our how-to videos to learn more about installing and caring for BLANCO products:

<https://www.blanco.com/us-en/service/how-to-videos/how-to-videos-for-sinks/>




Questions? Contact us today



BLANCO America, Inc.
110 Mount Holly By-Pass
Lumberton, NJ 08048

Phone & Fax
Phone: 888-668-6201
Fax: 609-668-6211

While BLANCO endeavors to provide accurate information, all dimensions are nominal, cannot be guaranteed, and are subject to change or cancellation. BLANCO assumes no responsibility for use of superseded or voided specifications.

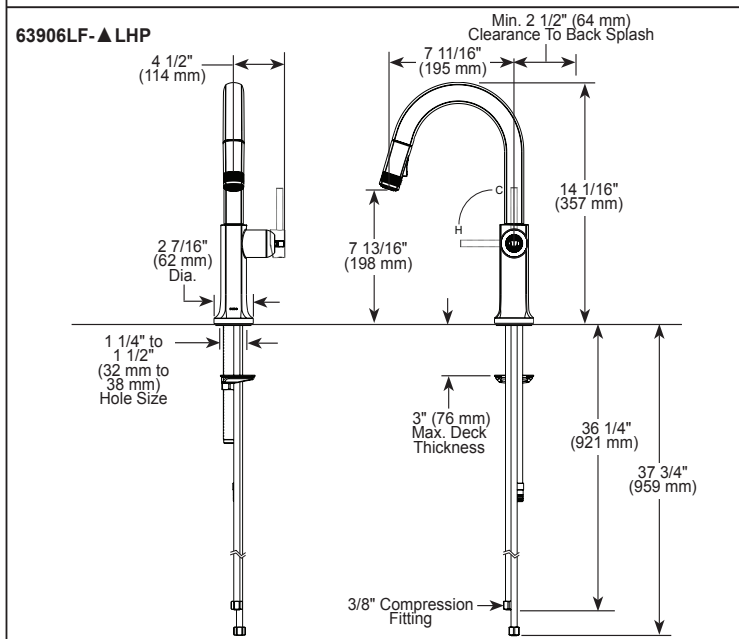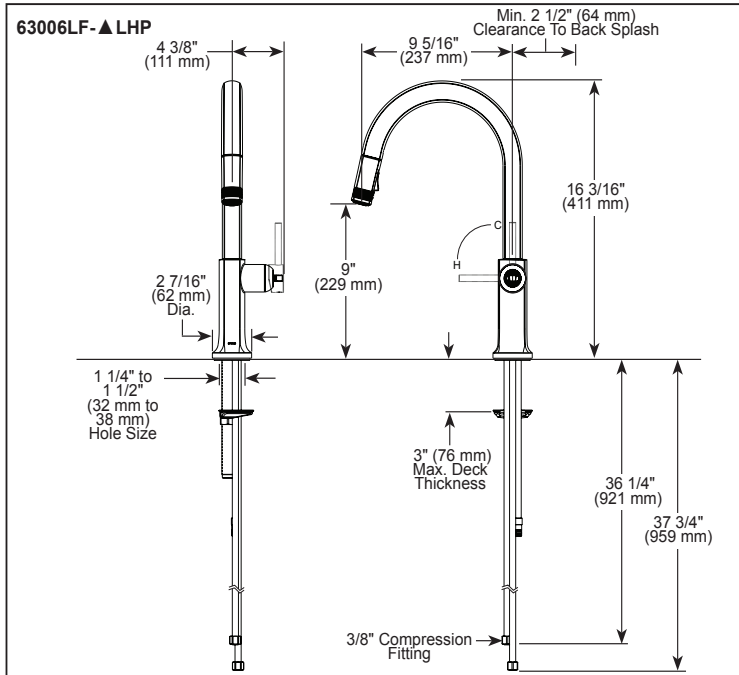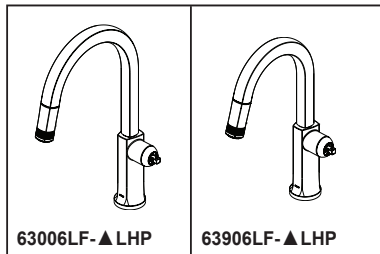

▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-K-63006LF-LHP Rev. D

BRIZO®

KITCHEN FAUCETS

- Kintsu® Collection
- Single Handle Deck Mount

FEATURES:

- DIAMOND Seal® Technology
- MagneDock® Magnetic Docking
- Touch-Clean® Sprayhead
- Lumicoat® Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS:



- Max flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- One hole mount
- Spout rotates 360°
- Diamond coated ceramic cartridge
- Quick connect hoses
- Two-function wand: Aerated stream or spray
- Dual integral check valves in sprayer
- Handles sold separately. See handle options below

WARRANTY




- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- NSF/ANSI/CAN 61 & 372
- ICC/ANSI A117.1 - Valve control only

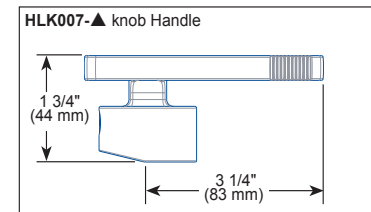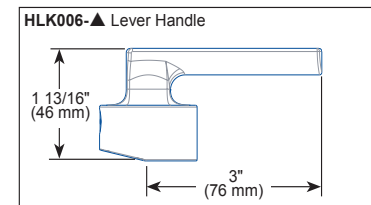

Brizo Kitchen & Bath Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Company

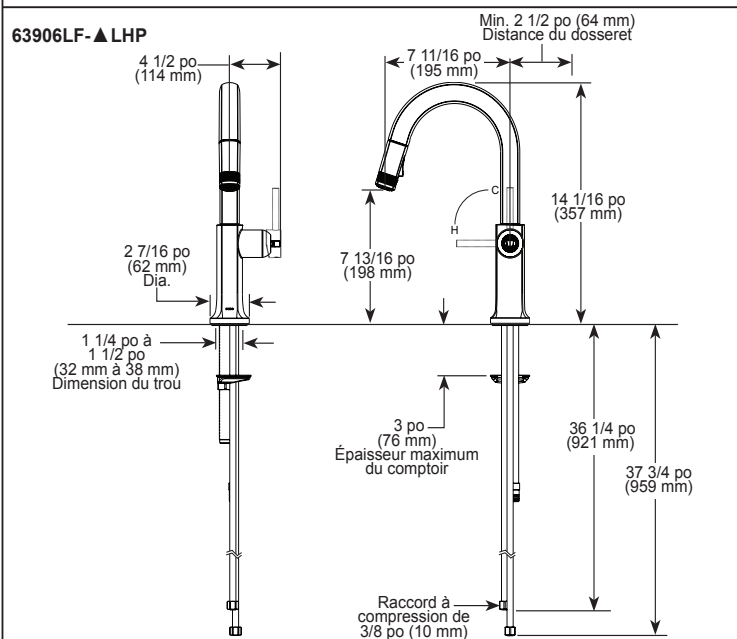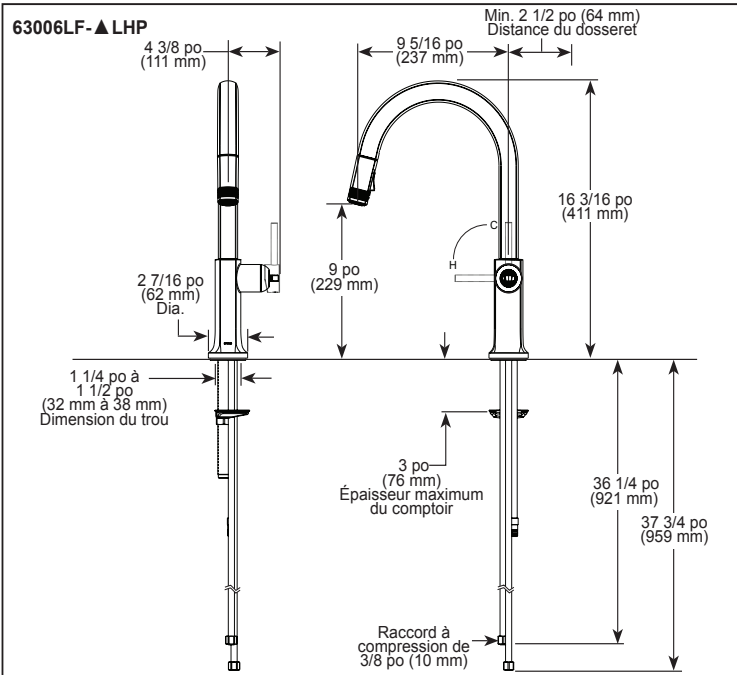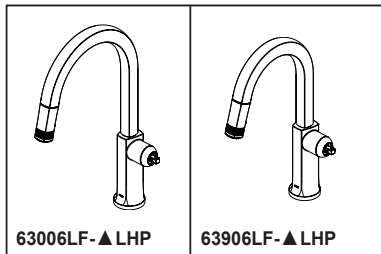

▲ Désigne le suffixe approprié de la finition

Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

BSP-K-63006LF-LHP Rév. D

BRIZO^{MD}

ROBINETS DE CUISINE

- Collection Kintsu^{MD}
- Poignée unique, installation sur le comptoir

CARACTÉRISTIQUES :

- Technologie DIAMOND Seal^{MD}
- Ancrage magnétique MagneDock^{MD}
- Tête de pulvérisation Touch-Clean^{MD}
- Finis Lumicoat^{MD} se nettoient facilement sans avoir recours à des nettoyeurs ou à des produits chimiques sur les surfaces les plus fréquemment touchées.

SPÉCIFICATIONS STANDARDS :



- Débit maximal 1,8 gal./min à 60 psi, 6,8 L/min à 414 kPa
- Installation monotrou
- Bec pivotant à 360°
- Cartouche en céramique recouverte de diamants
- Boyaux à raccordement rapide
- Douchette à deux fonctions : jet aéré ou pulvérisation
- Deux clapets anti-retour intégrés dans la douchette
- Poignées vendues séparément. Voir les options de poignées ci-dessous.

GARANTIE


- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée

CONFORME À :

- ASME A112.18.1 / CSA B125.1
- NSF/ANSI/CAN 61 et 372
- ICC/ANSI A117.1 - Contrôle de la soupape seulement

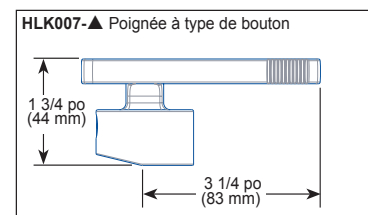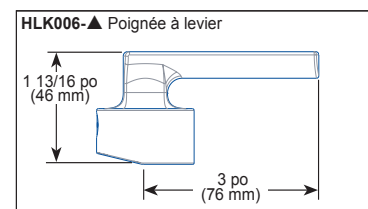

Brizo Kitchen & Bath Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Company



BRIZO®


FLANGE AND STRAINER

STANDARD SPECIFICATIONS:

- 4 1/2" diameter brass flange
- Kitchen sink applications
- Top mount flange provides easy installation
- Brass strainer and basket ensure quality and reliability

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty

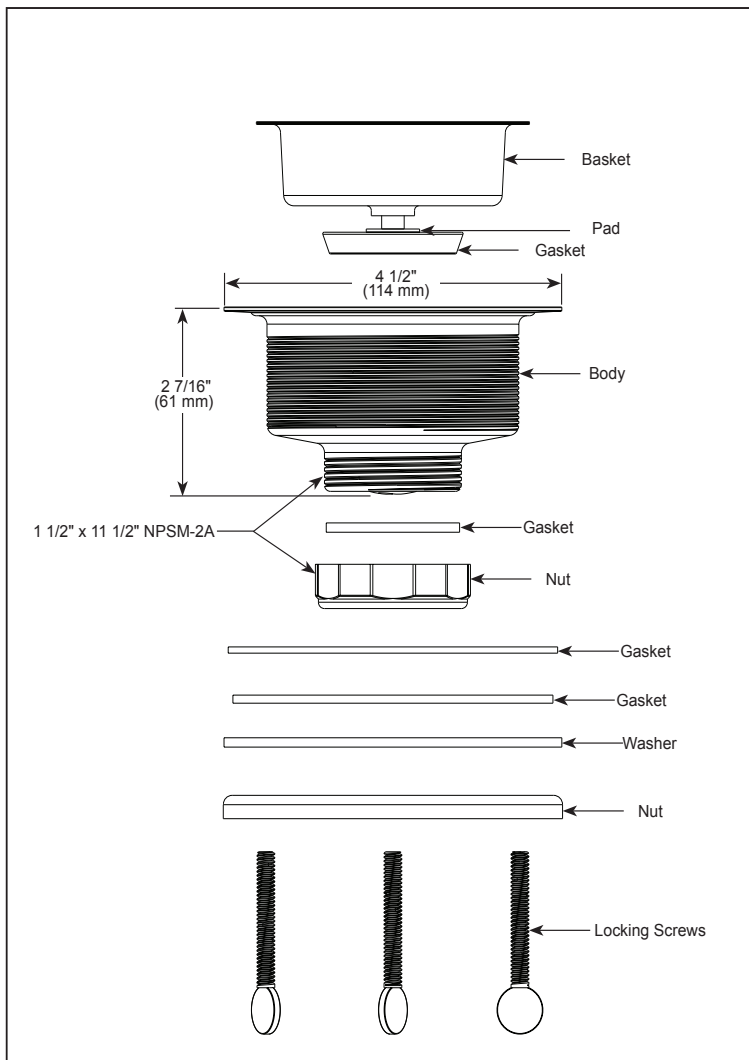


▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-A-69052 Rev. D

Brizo Kitchen & Bath Company

55 E. 111th Street, Carmel, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Company



BRIZO®


BRIDE ET CRÉPINE

SPÉCIFICATIONS STANDARDS :

- Bride en laiton de 4 1/2 po (11,4 cm) de diamètre
- Applications d'évier de cuisine
- La bride de montage supérieure permet une installation facile
- La crépine et le panier en laiton assurent qualité et fiabilité

GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée

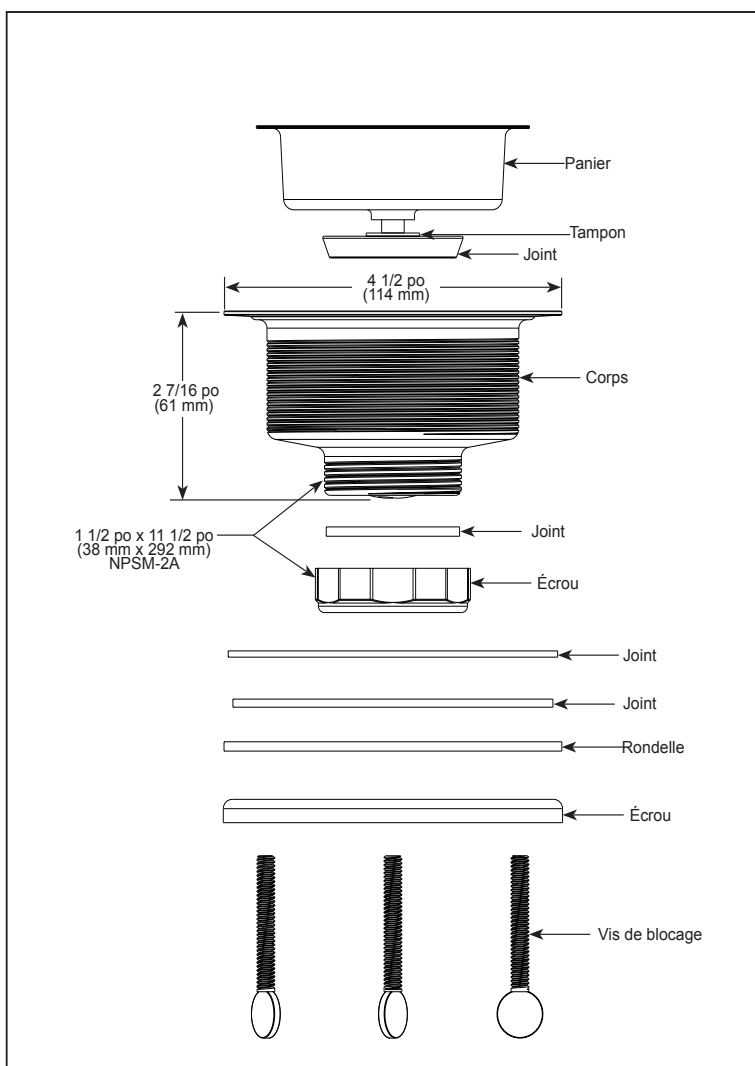

▲ Désigne le suffixe approprié de la finition



Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

BSP-A-69052 Rév. D

Brizo Kitchen & Bath Company

55 E. 111th Street, Carmel, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Company

VENDOR PART	VENDOR	DESCRIPTION	PAGE
653110LF-GLLHP	Brizo	Roccesco Widespread Lavatory Faucet With Arc Spout, Less Handles - Luxe Gold	56
HK53112-GL	Brizo	Roccesco Widespread Lavatory Knob Handle Kit - Luxe Gold	N/A
RP72414GL	Brizo	Push Button Pop Up With Overflow - Luxe Gold	57
K-29000-0	Kohler	Caxton 16 1/8" Round Undermount Bathroom Sink, No Overflow - White	58
K-78080-0	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	61
K-21710-L-BV	Kohler	Reach Left Hand Trip Lever - Vibrant Brushed Bronze	64

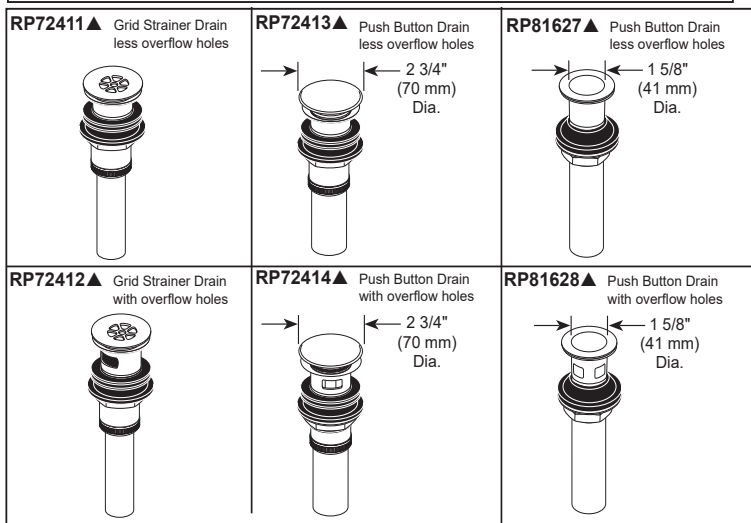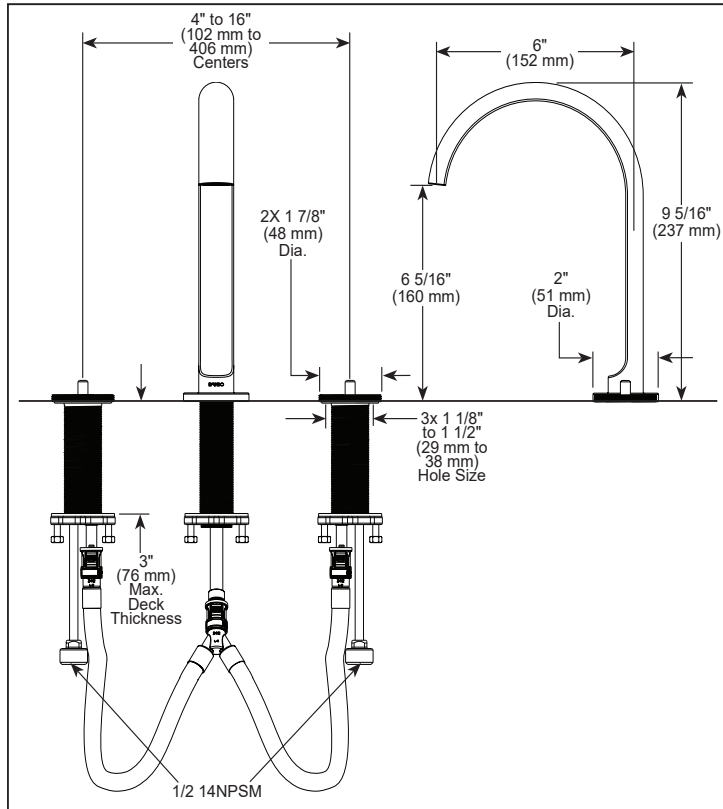

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-653110LF-LHP Rev. A

BRIZO®

BATHROOM FAUCET

- Roccesco™ Bath Collection
- Two Handle Widespread Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three-hole mount
- Control mechanism is a rotating cylinder ceramic cartridge with 90° rotation
- 1/2-14 NPSM threaded inlets
- Solid brass fabricated end valve and spout bodies
- Spout features laminar water flow
- LHP - Less Handle Product. See handle options below
- Drain sold separately


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®
- ICC/ANSI A117.1 - Valve control only

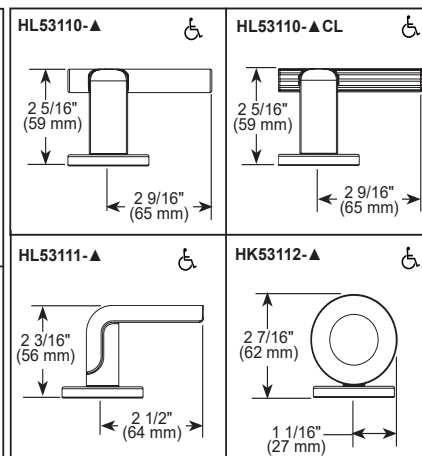

Brizo Kitchen & Bath Company

55 E. 111th Street, Carmel, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Company



BRIZO®

PUSH BUTTON BATHROOM DRAIN ASSEMBLY

- Push Button Drain
- For Use with Bathroom Sinks with Built-In Overflow Drain Holes

STANDARD SPECIFICATIONS:


- Push button drain
- For use with bathroom sinks with built-in overflow drain holes
- Fits sinks with standard 1 5/8" drain hole size

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.2 / CSA B125.2

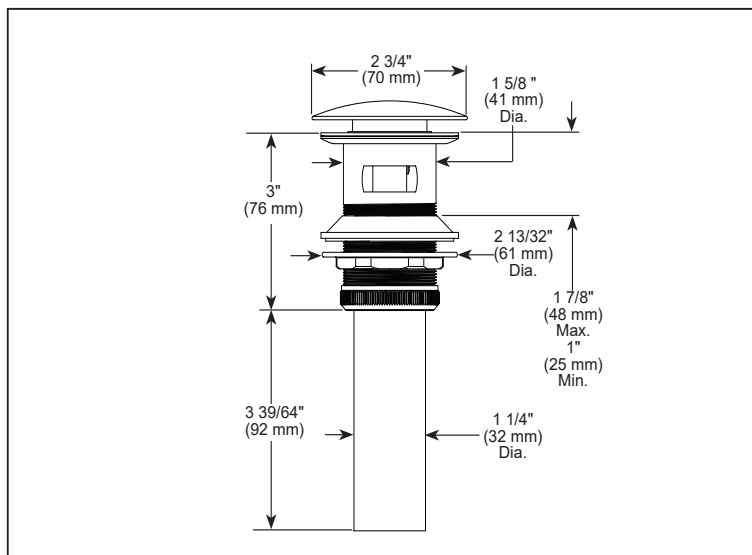

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-RP72414 Rev. D

Brizo Kitchen & Bath Company
55 E. 111th Street, Carmel, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2024 Brizo Kitchen & Bath Company

KOHLER®

Caxton® | K-29000

16-1/8" round undermount bathroom sink, no overflow

Features

- Without overflow
- No faucet holes; requires wall- or counter-mount faucet



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----|-------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 20:1 - US-CA

THE BOLD LOOK
OF **KOHLER®**

1

KOHLER

Caxton® | K-29000
16-1/8" round undermount bathroom sink, no overflow

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651

Technical Information

Drain Hole Diameter: 1-3/4" (44 mm)
Basin Configuration: Single Bowl
Basin Length: 13-13/16" (351 mm)
Basin Width: 13-13/16" (351 mm)
Basin Depth: 5-1/16" (129 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment
K-9018 Adjustable P-trap with long tubing outlet, 1-1/4" x 1-1/4"
K-23725 Cast iron cleaner

Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty





1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 20:1 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Caxton® | K-29000

16-1/8" round undermount bathroom sink, no overflow

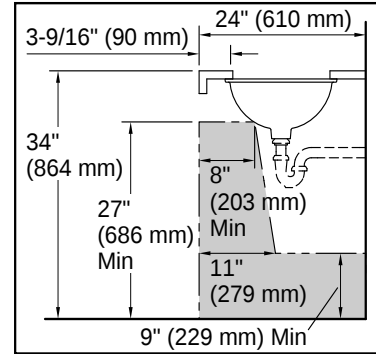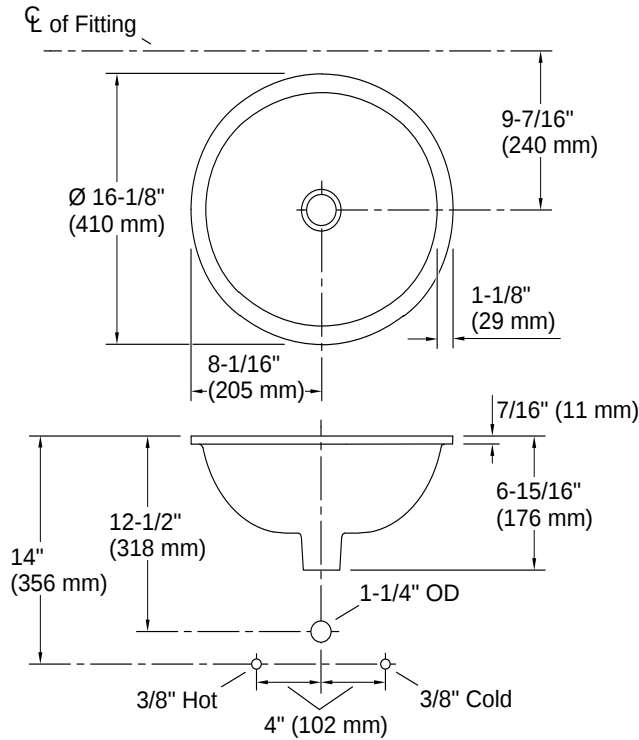

Recommended ADA Installation

Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

NOTICE: Countertop manufacturer or cutter must use the current product template available at www.kohler.com or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cut-out template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 20:1 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) glazed trapway
- Includes Impro® ReadyLatch® Quiet-Close™ toilet seat
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----|-------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | NY | Dune |
|  | 95 | Ice Grey |
|  | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER®

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ADA CSA B651 OBC

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Recommended Products/Accessories

1023457 Toilet Wax Ring And Hardware Kit
K-21710-L Left-hand trip lever
K-23726 Drain treatment
K-4108 Elongated bidet toilet seat with remote control
K-30780 Quiet-Close™ elongated toilet seat
K-5381 14" rough-in full skirt trap and attachment system
K-5383 10" rough-in full skirt trap and attachment system

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)
Bowl Shape:	Elongated
Waste Outlet:	Floor
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted
Water Surface Size:	9-1/8" x 8-1/2" (232 mm x 216 mm)
Rim to Water Surface:	6-3/8" (162 mm)

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure:	25 psi (172.4 kPa)
Minimum Flow Rate:	0.43 gpm (1.6 l/min)




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER.

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

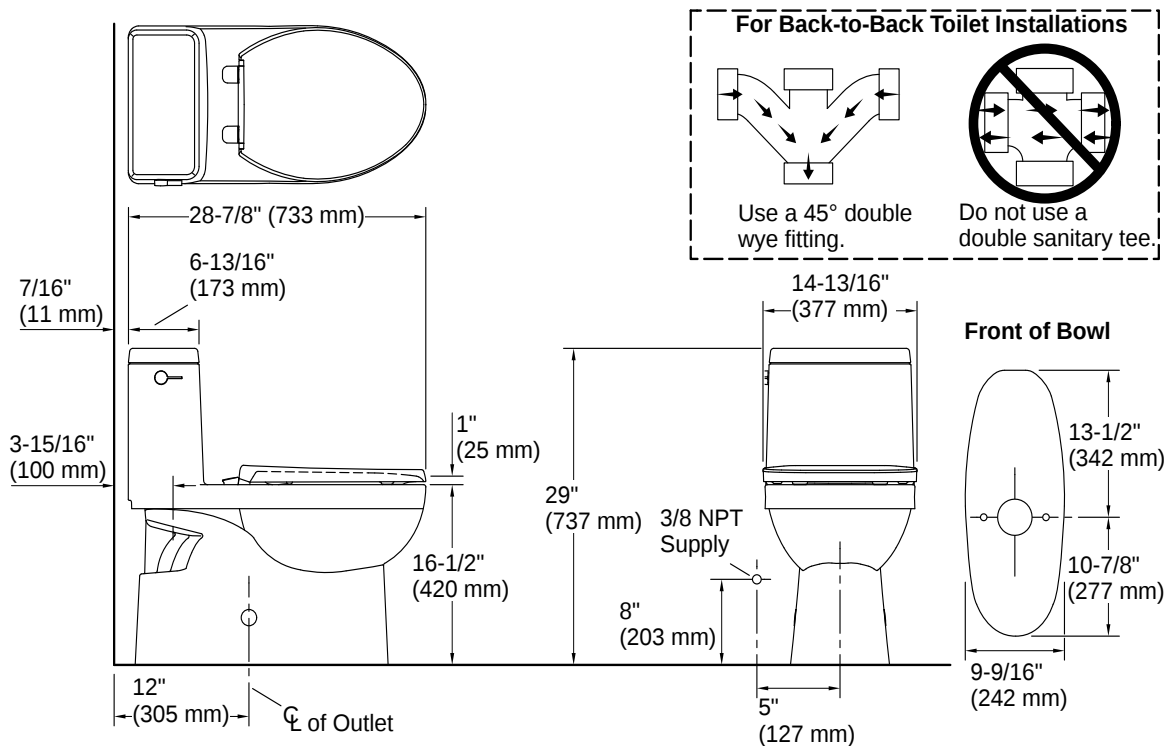

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Supply line sold separately

Installation Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

Reach® | K-21710-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-78080 Reach™ toilet



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|-----|-------------------------------|
|  | CP | Polished Chrome |
|  | SN | Vibrant Polished Nickel |
|  | AF | Vibrant French Gold |
|  | BN | Vibrant Brushed Nickel |
|  | BV | Vibrant Brushed Bronze |
|  | BL | Matte Black |
|  | 2MB | Vibrant Brushed Moderne Brass |
|  | TT | Vibrant Titanium |
|  | BGP | Vibrant Brushed Graphite |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Reach® | K-21710-L
Left-hand trip lever

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER**®

KOHLER

Reach® | K-21710-L
Left-hand trip lever

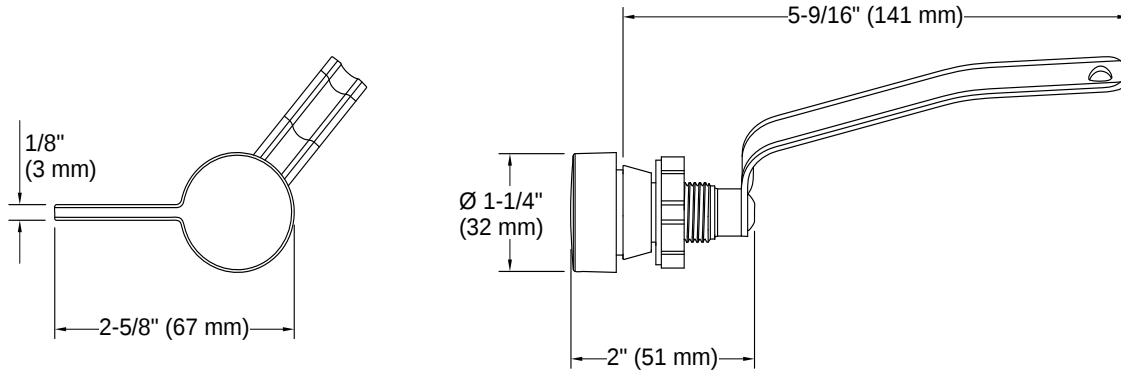

Installation Notes

Install this product according to the installation instructions.





1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER**

VENDOR PART	VENDOR	DESCRIPTION	PAGE
65367LF-GLLHP-ECO	Brizo	Allaria Widespread Lavatory Faucet With Arc Spout Less Handles - Luxe Gold	70
HL5367-GL	Brizo	Allaria Widespread Handle Kit Twist Lever - Luxe Gold	72
RP72414GL	Brizo	Push Button Pop Up With Overflow - Luxe Gold	73
K-20000-0	Kohler	Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White	74
BESPRFOOT-01	Bain Ultra	Essencia 6838 Freestanding Rectangular Freestanding Thermomasseur - White	77
BESPRFOON-01	Bain Ultra	**(OR)** Essencia 6838 Freestanding Rectangular Freestanding Tub - White	79
T70310-GLLHP	Brizo	Kintsu Two Handle Tub Filler Body Assembly - Luxe Gold	81
T70367-GL	Brizo	Allaria Two Handle Tub Filler Trim Kit With Twist Lever Handles - Luxe Gold	85
T71766-GL	Brizo	Kintsu Floor Mount Tub Filler Unions - Luxe Gold	N/A
R70200	Brizo	Two Handle Freestanding Tub Filler Rough	89

T66T006-GLLHP	Brizo	Kintsu Sensori Thermostatic Valve Trim Less Handle - Luxe Gold	90
HL6667-GL	Brizo	Allaria Sensori Thermostatic Handle Kit Twist Lever - Luxe Gold	N/A
R35000-WS	Brizo	Sensori Thermostatic Shower Rough	91
T66667-GL	Brizo	Allaria Sensori Volume Control Trim With Twist Lever Handle - Luxe Gold	92
R35600	Brizo	Sensori Volume Control Rough	94
87380-GL	Brizo	5" Linear Square Single Function Wall Mount Showerhead - Luxe Gold	95
RP74448GL	Brizo	7" Linear Square Wall Mount Shower Arm And Flange - Luxe Gold	N/A
81986-GL-2.5	Brizo	14" Linear Square Raincan, 2.5 Gpm - Luxe Gold	96
RP48985GL	Brizo	6" Ceiling Mount Shower Arm And Round Flange - Luxe Gold	98
88767-GL	Brizo	Allaria Multi Function Slide Bar Handshower - Luxe Gold	100
K-9136-BV	Kohler	Clearflo Square Design Tile In Shower Drain - Vibrant Brushed Bronze	102

K-78080-0	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	105
K-21710-L-BV	Kohler	Reach Left Hand Trip Lever - Vibrant Brushed Bronze	108

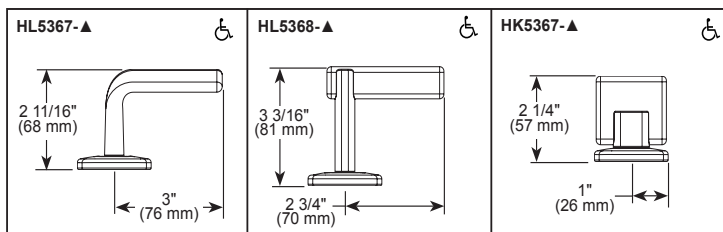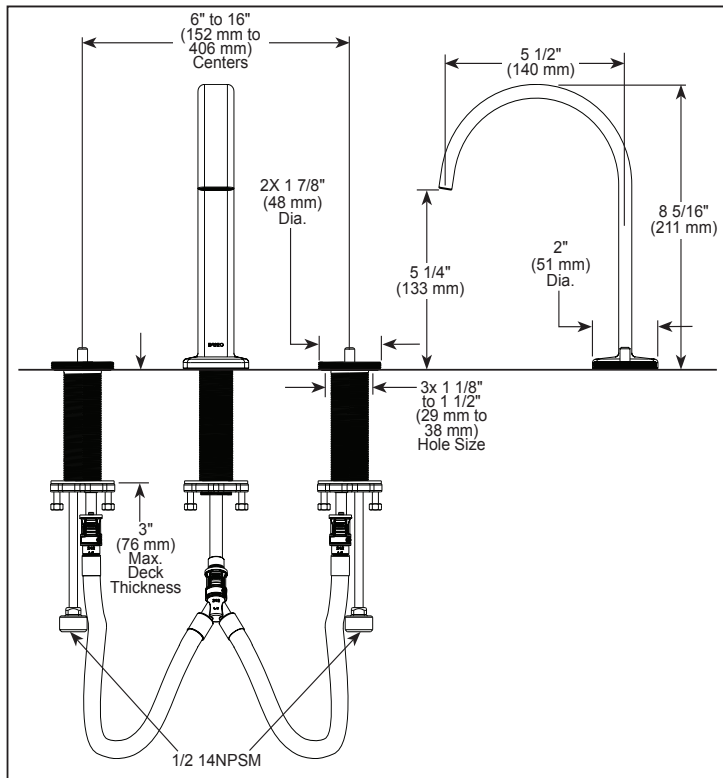

▲ Designate Proper Finish Suffix

BRIZO®

BATHROOM FAUCET

- Allaria® Collection
- Two Handle Widespread Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three hole mount
- Control mechanism is a rotating cylinder ceramic cartridge with 90° rotation
- 1/2-14 NPSM threaded inlets
- Solid brass fabricated end valve and spout bodies
- Spout features laminar water flow
- LHP - Less Handle Program. See handle options below
- Drain sold separately

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®
- ICC/ANSI A117.1 - Valve control only

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

BSP-L-65367LF-LHP-ECO Rev. C



BRIZO^{MD}

ROBINET POUR SALLE DE BAIN

- Collection Allaria^{MD}
- Deux poignées à grand écartement, installé sur plan

SPÉCIFICATIONS STANDARDS :

- Débit maximal 1,2 gpm à 60 psi, 4,5 L/min à 414 kPa
- Montage à trois trous
- Le mécanisme de contrôle est une cartouche en céramique à cylindre rotatif avec une rotation de 90°
- Entrées filetées 1/2 po (13 mm) -14 NPSM
- Soupapes d'extrémité et corps du bec en laiton massif.
- Le bec offre un écoulement d'eau laminaire
- LHP - Programme sans poignée. Voir les options de poignées ci-dessous.
- Drain vendu séparément



GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée.



CONFORME À :

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense^{MD}
- ICC/ANSI A117.1- Contrôle de soupape uniquement

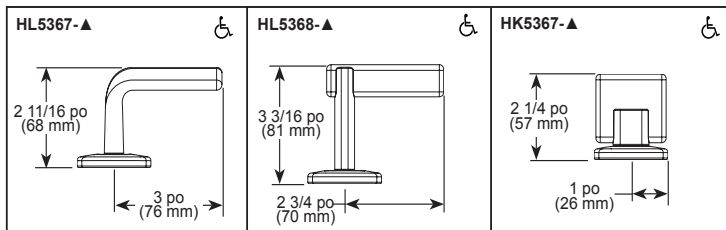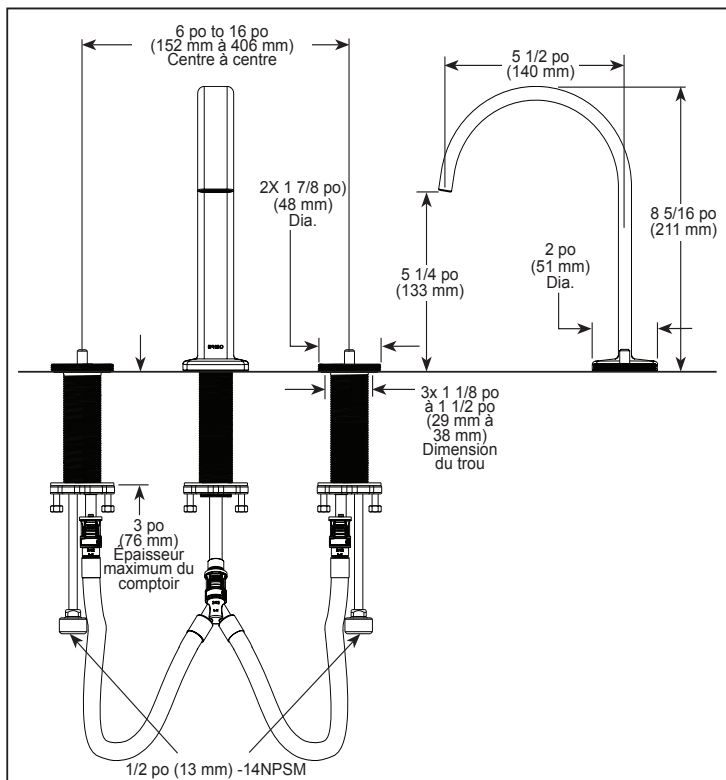

▲ Désigne le suffixe approprié de la finition

Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

Brizo Kitchen & Bath Faucet Company



55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

BSP-L-65367LF-LHP-ECO Rév. C



Submitted Model No.: _____

Specific Features: _____

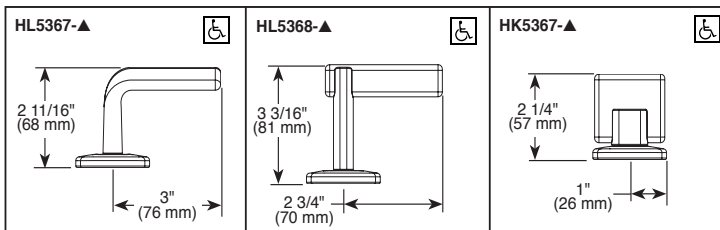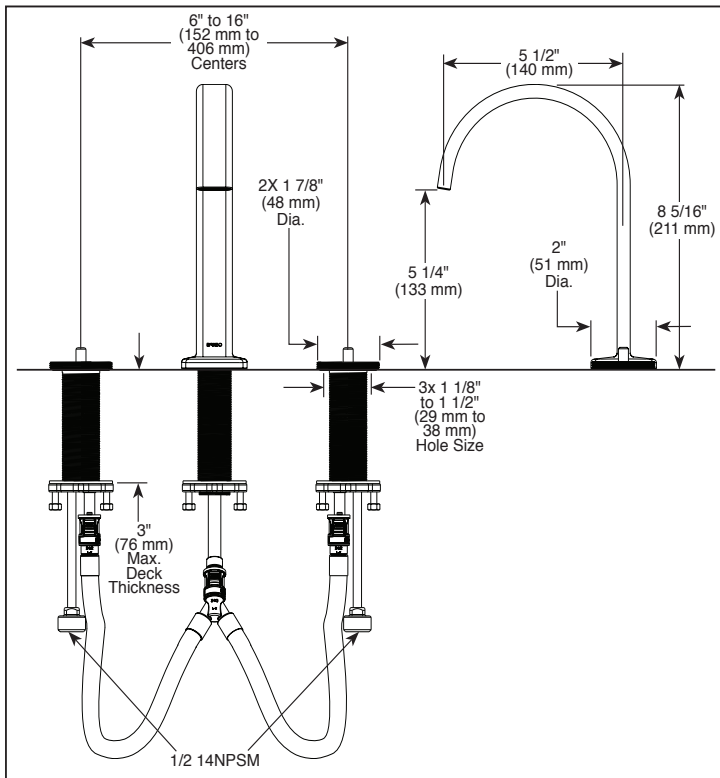

▲ Designate Proper Finish Suffix

BRIZO®

BATHROOM FAUCET

- Allaria™ Collection
- Two Handle Widespread Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three hole mount
- Control mechanism is a rotating cylinder ceramic cartridge with 90° rotation
- 1/2-14 NPSM threaded inlets
- Solid brass fabricated end valve and spout bodies
- Spout features laminar water flow
- Handles sold separately
- Drain sold separately


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®



BRIZO®

PUSH BUTTON BATHROOM DRAIN ASSEMBLY

- Push Button Drain
- For Use with Bathroom Sinks with Built-In Overflow Drain Holes

STANDARD SPECIFICATIONS:


- Push button drain
- For use with bathroom sinks with built-in overflow drain holes
- Fits sinks with standard 1 5/8" drain hole size

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.2 / CSA B125.2

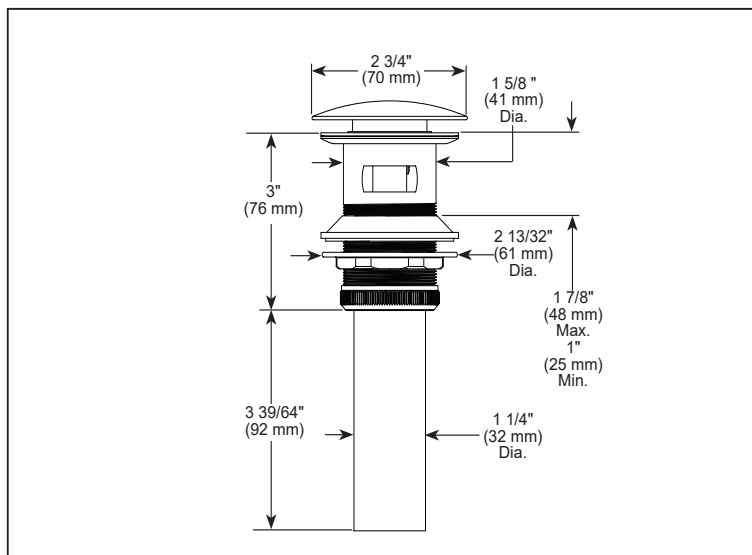

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-RP72414 Rev. D

Brizo Kitchen & Bath Company
55 E. 111th Street, Carmel, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2024 Brizo Kitchen & Bath Company

KOHLER®

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Features

- Rectangular basin
- Overflow drain
- No faucet holes; requires wall- or counter-mount faucet



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----|-------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Caxton® | K-20000
20-1/2" rectangular undermount bathroom sink

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

CSA B651

Technical Information

With Overflow:	Yes
Drain Hole Diameter:	1-3/4" (44 mm)
Basin Configuration:	Single Bowl
Basin Length:	17-5/8" (448 mm)
Basin Width:	13-1/8" (334 mm)
Basin Depth:	5-5/16" (135 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment

K-23725 Cast iron cleaner

Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.



5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER**


KOHLER

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

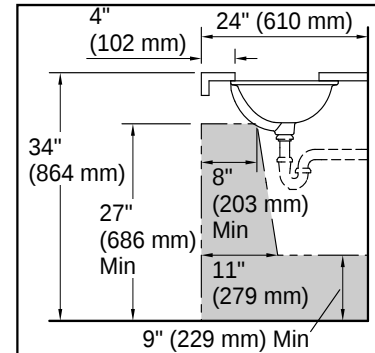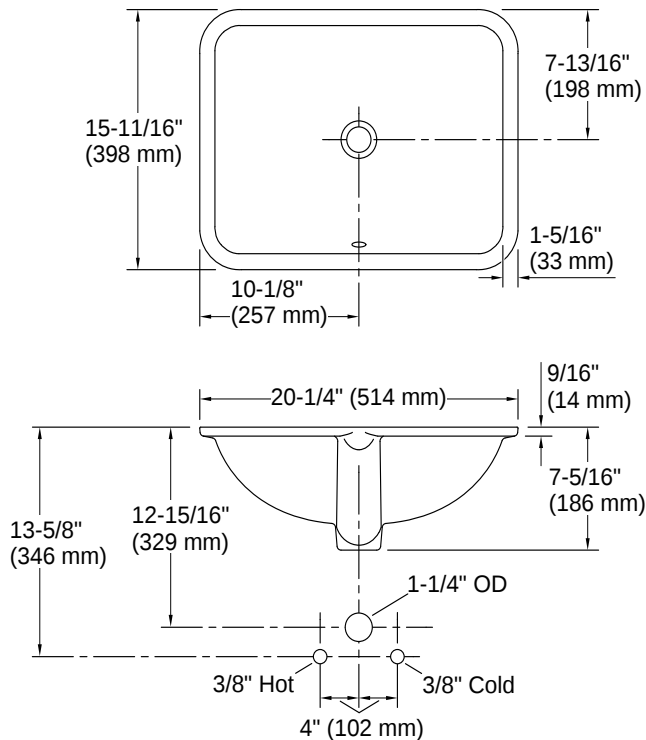

Recommended ADA Installation



Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER**

Product Sheet

essencia 6838

Freestanding
68" x 38" x 26"



Product No.

Model Freestanding TMU BESPRFOOT-XX Soaker BESPRFOON-XX

ThermoMasseur (TMU)

Air Jet System	\$11,035
Jets	59
1 heated backrest & headrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH	Included
Geysair®	Included
AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995

Soaker

AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy

Features

Installation Type	Freestanding
No. of bathers 4 Imp. gallons 56 US gallons 67 Raised seat 1 Inverted V 1 Armrests 2 Grab bars (Color match) 2 Footrest 1	
Integrated Drain & Overflow — ZenFlow [†] BOVERINZF-01	
☐ White 01	Installed & Included
Standard Bath Color p.17	
☐ White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17			
☒ Black / White 66			\$475
Finish p.17			
☐ UltraVelour Matte Finish (white only) BVEL2			\$850
Clear Acrylic Grab Bars BGBG10-XX p.16			
☐ Chrome 07 ☐ Brushed Nickel 09 inserts			\$60
Bath Pillow BPILLOW p.252			\$240
Comfort Cushion BCUSHIONA p.253			\$540
☐ Grey 05 ☒ Black 06			
Drain & Overflow p.14	Integrated ZenFlow [†] BOVERINZF-XX	Integrated with trim BOVERIN-XX	16" x 35"*** BOVER16-XX
☐ Chrome 07	\$40	\$70	\$95
☐ White 01	Incl.	\$40	\$125
☐ Brushed Nickel 09 ☐ Polished Nickel 10	\$40	\$70	\$235
☒ Oil-rubbed Bronze 11	N/A	N/A	\$235
☒ Matte Black 19 ☐ Satin Brass 18	\$95	\$125	N/A
☐ Matte White 32	\$40	\$70	N/A
Island Tub Drain™ *** p.15			
Island Tub Drain™ BSLDD		\$260	
Cast Iron Island Tub Drain™ BSLDDCI		\$310	
If Required by Construction Code or installed with ITD			
Brass drain & overflow kit [‡] BDRCOB		\$240	
Brass drain kit [‡] BDRCB		\$60	
16" x 35" Cable driven brass drain & overflow kit BOVERBR		\$240	

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

- [†] ZenFlow: Integrated overflow without a trim.
^{*} For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.
^{**} The AromaCloud® is built into the deck (factory installed).
^{***} An Island Tub Drain™ is required when there is no access under the bath. ITD requires the Brass drain kit (BDRCB) if ordered with the Integrated drain & overflow. ITD requires the 16 x 35" Cable driven brass drain & overflow kit (BOVERBR) if ordered with the 16 x 35" drain & overflow.
[‡] When ordered with Integrated drain & overflow.

bain
Ultra

2025

1 800 463-2187

https://bainultra.com/sites/default/files/product_files/product-sheet-essencia-6838.pdf


For the installer
Scan to view
installation video
(3:20 min) →




Product Sheet

essencia 6838

Freestanding
68" x 38" x 26"

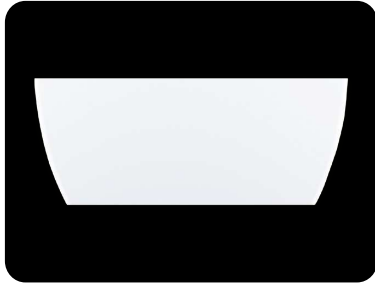

Technical Specifications

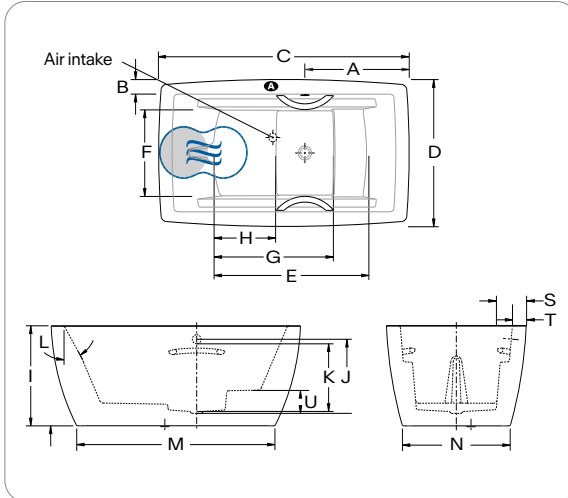

Letter	Description	Measure
A	Outside edge to center drain	28 1/4"
B	Deck width	3 3/4"
C	Total length	68"
D	Total width	38"
E	Bathing well length	42"
F	Bathing well width	22 3/8"
G	Bottom bathing well length	32 3/8"
H	Raised seat length	16 1/8"
I	Height from bottom of bath to top deck	26"
J	Height from bottom of drain to center of overflow	19 1/8"
K	Maximum water level (Drain & overflow 16" x 35") Maximum water level (Integrated drain & overflow)	17 5/8" 18 1/8"
L	Slope of backrest	30°
M	Base length	54 1/8"
N	Base width	29 1/4"
S	Minimum spout reach	7 3/4"
T	Outside edge to overflow	4"
U	Height of footrest	5 1/2"

● AromaCloud® position ● Indicates heated backrest (TMU)
⊕ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. TMU: Control must be wall-mounted. Soaker: DOT Controls are located on either sides of the AromaCloud®.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000057
Approx. shipping weight	290 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.

Copyright © April 2025 | Bains Ultra Inc. All rights reserved.

Product Sheet

essencia 6838

Freestanding
68" x 38" x 26"



Product No.

Model Freestanding TMU BESPRFOOT-XX Soaker BESPRFOON-XX

ThermoMasseur (TMU)

Air Jet System	\$11,035
Jets	59
1 heated backrest & headrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH	Included
Geysair®	Included
AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995

Soaker

AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy

Features

Installation Type	Freestanding
No. of bathers 1 Imp. gallons 56 US gallons 67 Raised seat 1 Inverted V 1 Armrests 2 Grab bars (Color match) 2 Footrest 1	
Integrated Drain & Overflow — ZenFlow [†] BOVERINZF-01	
☐ White 01	Installed & Included
Standard Bath Color p.17	
☐ White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17			
☒ Black / White 66			\$475
Finish p.17			
☐ UltraVelour Matte Finish (white only) BVEL2			\$850
Clear Acrylic Grab Bars BGBG10-XX p.16			
☐ Chrome 07 ☐ Brushed Nickel 09 inserts			\$60
Bath Pillow BPILLOW p.252			\$240
Comfort Cushion BCUSHIONA p.253			\$540
☐ Grey 05 ☒ Black 06			
Drain & Overflow p.14	Integrated ZenFlow [†] BOVERINZF-XX	Integrated with trim BOVERIN-XX	16" x 35"*** BOVER16-XX
☐ Chrome 07	\$40	\$70	\$95
☐ White 01	Incl.	\$40	\$125
☐ Brushed Nickel 09 ☐ Polished Nickel 10	\$40	\$70	\$235
☒ Oil-rubbed Bronze 11	N/A	N/A	\$235
☒ Matte Black 19 ☐ Satin Brass 18	\$95	\$125	N/A
☐ Matte White 32	\$40	\$70	N/A
Island Tub Drain™ *** p.15			
Island Tub Drain™ BSLDD		\$260	
Cast Iron Island Tub Drain™ BSLDDCI		\$310	
If Required by Construction Code or installed with ITD			
Brass drain & overflow kit [‡] BDRCOB		\$240	
Brass drain kit [‡] BDRCB		\$60	
16" x 35" Cable driven brass drain & overflow kit BOVERBR		\$240	

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

- [†] ZenFlow: Integrated overflow without a trim.
^{*} For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.
^{**} The AromaCloud® is built into the deck (factory installed).
^{***} An Island Tub Drain™ is required when there is no access under the bath. ITD requires the Brass drain kit (BDRCB) if ordered with the Integrated drain & overflow. ITD requires the 16 x 35" Cable driven brass drain & overflow kit (BOVERBR) if ordered with the 16 x 35" drain & overflow.
[‡] When ordered with Integrated drain & overflow.

bain
Ultra

2025

1 800 463-2187

https://bainultra.com/sites/default/files/product_files/product-sheet-essencia-6838.pdf

For the installer
Scan to view
installation video
(3:20 min) →




Product Sheet

essencia 6838

Freestanding
68" x 38" x 26"



Technical Specifications

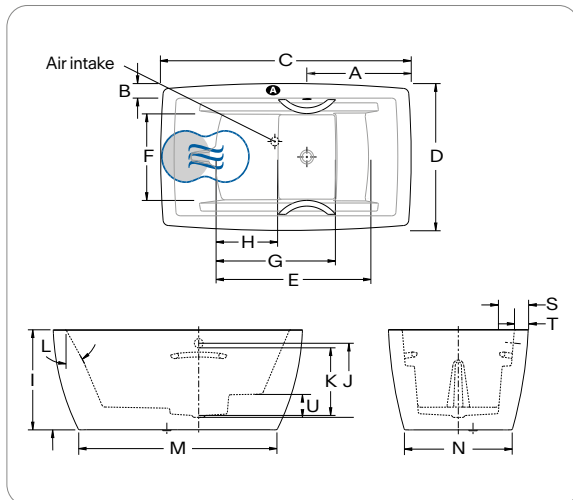

Letter	Description	Measure
A	Outside edge to center drain	28 1/4"
B	Deck width	3 3/4"
C	Total length	68"
D	Total width	38"
E	Bathing well length	42"
F	Bathing well width	22 3/8"
G	Bottom bathing well length	32 3/8"
H	Raised seat length	16 1/8"
I	Height from bottom of bath to top deck	26"
J	Height from bottom of drain to center of overflow	19 1/8"
K	Maximum water level (Drain & overflow 16" x 35")	17 5/8"
	Maximum water level (Integrated drain & overflow)	18 1/8"
L	Slope of backrest	30°
M	Base length	54 1/8"
N	Base width	29 1/4"
S	Minimum spout reach	7 3/4"
T	Outside edge to overflow	4"
U	Height of footrest	5 1/2"

● AromaCloud® position ● Indicates heated backrest (TMU)
 ☞ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. TMU: Control must be wall-mounted. Soaker: DOT Controls are located on either sides of the AromaCloud®.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000057
Approx. shipping weight	290 lb
Turbine power	550 W
Air heater	600 W


Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.

Copyright © April 2025 | Bains Ultra Inc. All rights reserved.

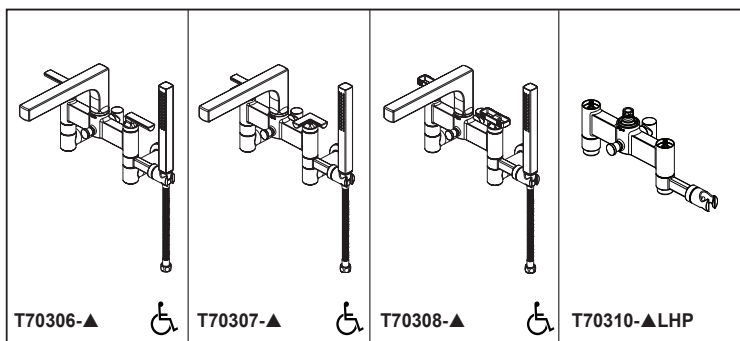

BRIZO®

TWO HANDLE WALL, DECK, AND FLOOR MOUNT TUB FILLER


■ Kintsu® Collection

■ Wall, Deck or Floor Mount


STANDARD SPECIFICATIONS:

- Hand shower max. flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Spout flow up to 10 gpm @ 60 psi, 37.8 L/min @ 410 kPa
- Solid brass construction
- Insulated floor and deck risers to control surface condensation and heat
- 60"-82" stretchable finished metal hose
- High flow ceramic control valves
- Available in lever, knob and cross handles
- Auto resetting diverter
- Dual column design on 8" center-to-center
- Drain not included
- Insulated floor risers to control surface condensation and heat
- Requires mounting hardware:
 - T71764-▲ wall mount unions
 - T71765-▲ deck mount risers
 - T71766-▲ floor mount risers
- Floor mount configuration requires rough-in to complete installation:
 - R70200-WS with integrated stops
 - R70200 without stops, provides maximum flow
- Optional accessory kit 695506

Wall Mount Configuration

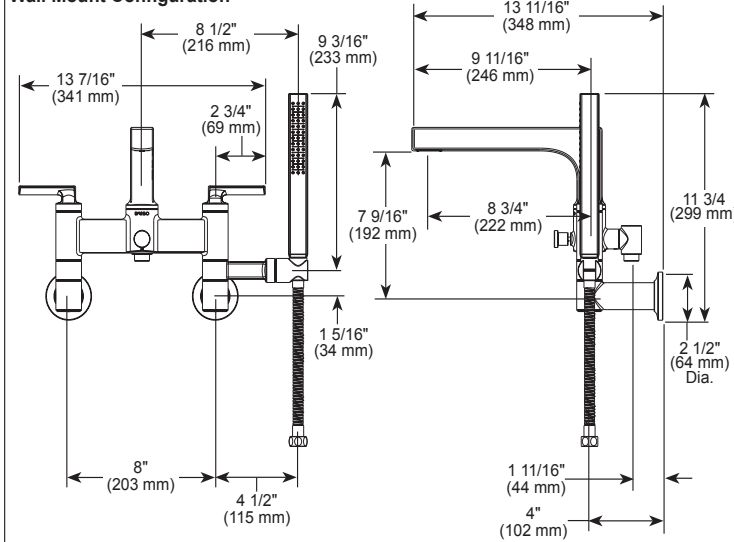

Deck Mount Configuration

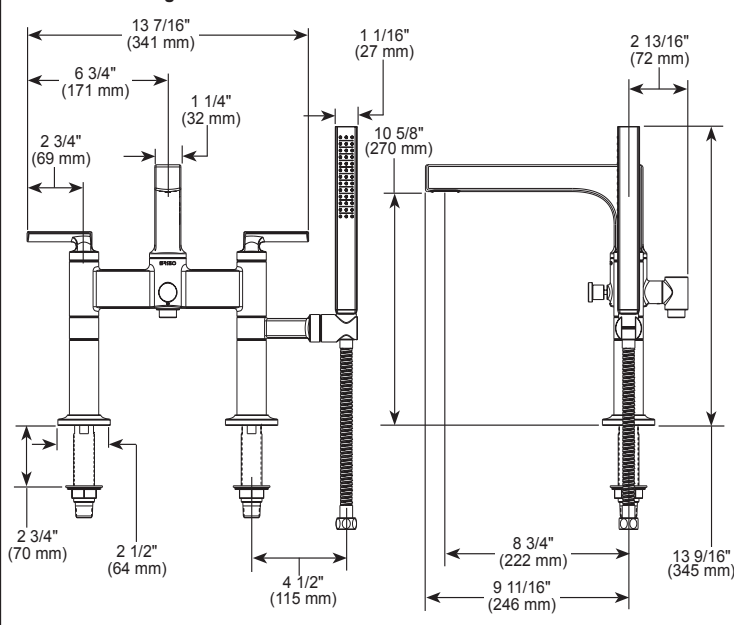

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T70306 Rev. D

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

WARNING: Risk of personal injury. Do not use the tub filler as a grab bar or support bar. Install this product according to the installation guide.





COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - Applies to T70306-▲, T70307-▲ & T70308-▲ only
- ICC/ANSI A117.1 - Valve control only

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

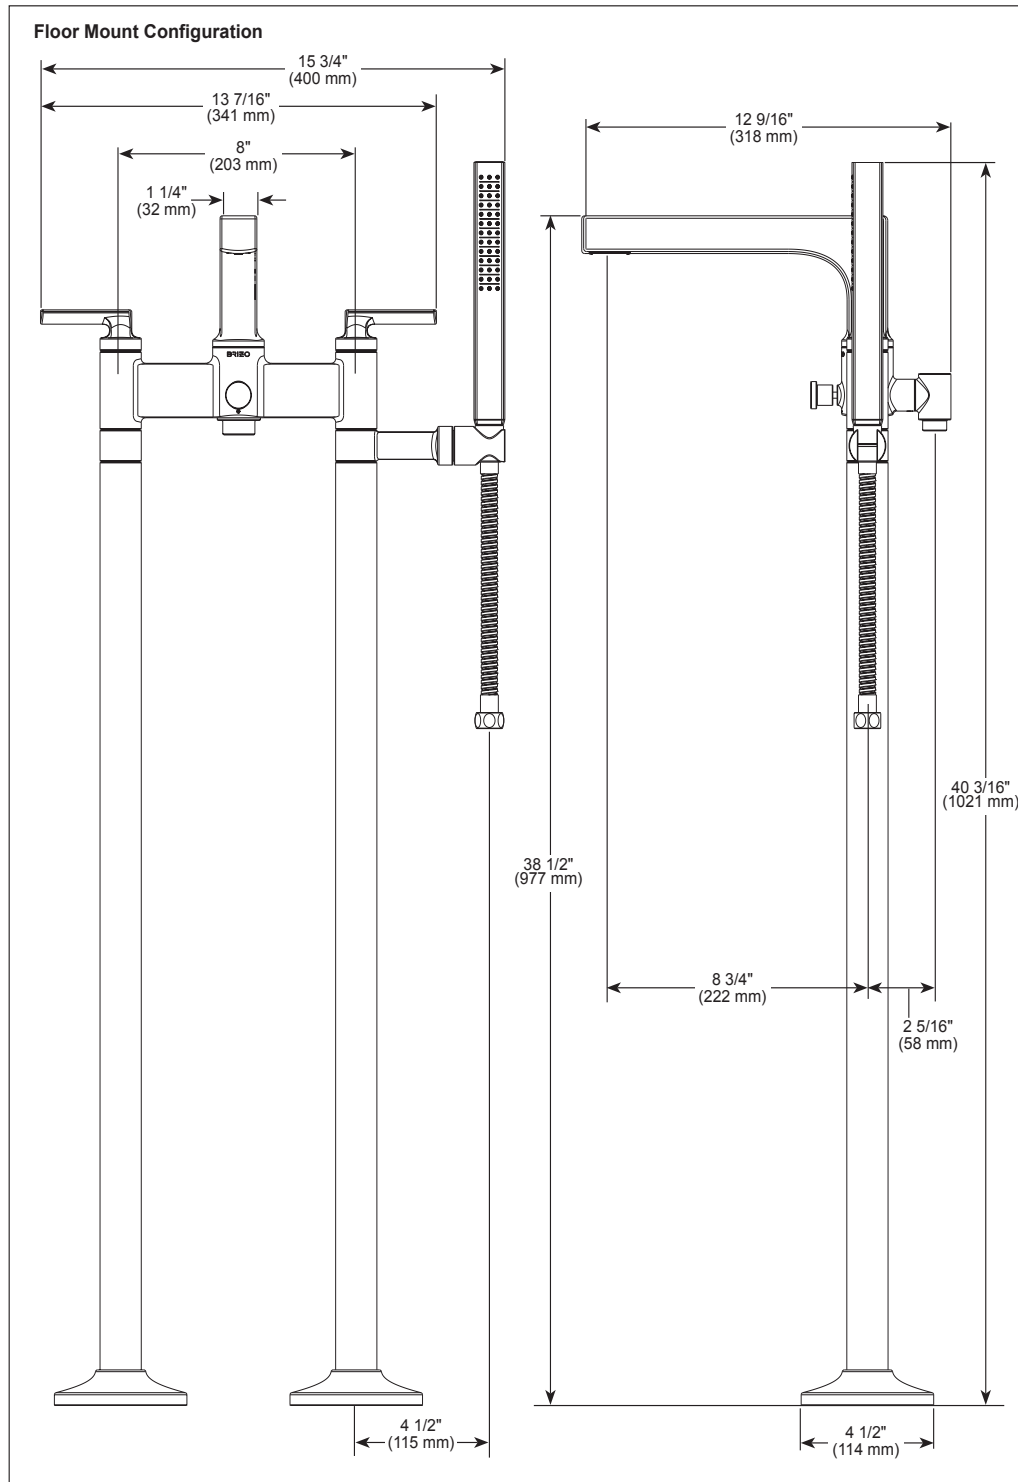

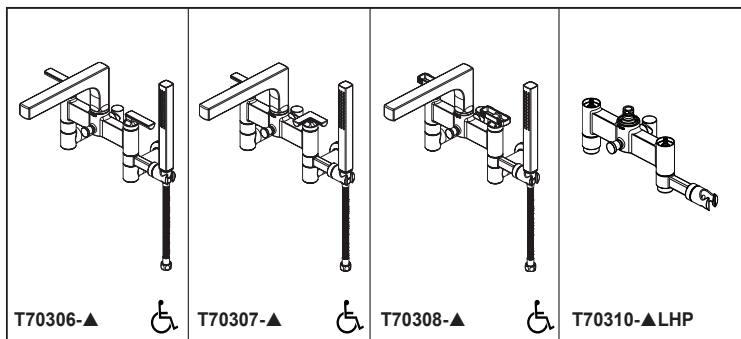


BRIZO^{MD}

ROBINET DE BAIGNOIRE À DEUX POIGNÉES, INSTALLÉ SUR LE PLANCHER, SUR PLAN ET AU MUR


■ Collection Kintsu^{MD}

■ Installé au mur, sur plan ou sur le plancher

Configuration pour montage mural

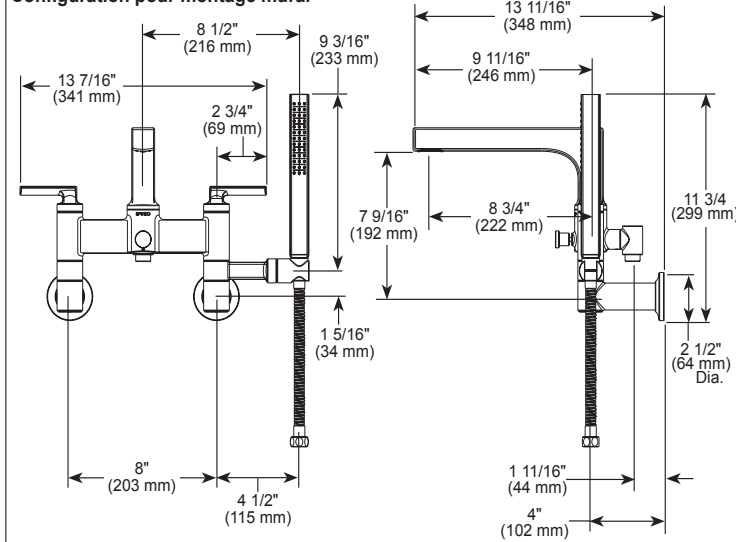

Configuration pour montage sur plan

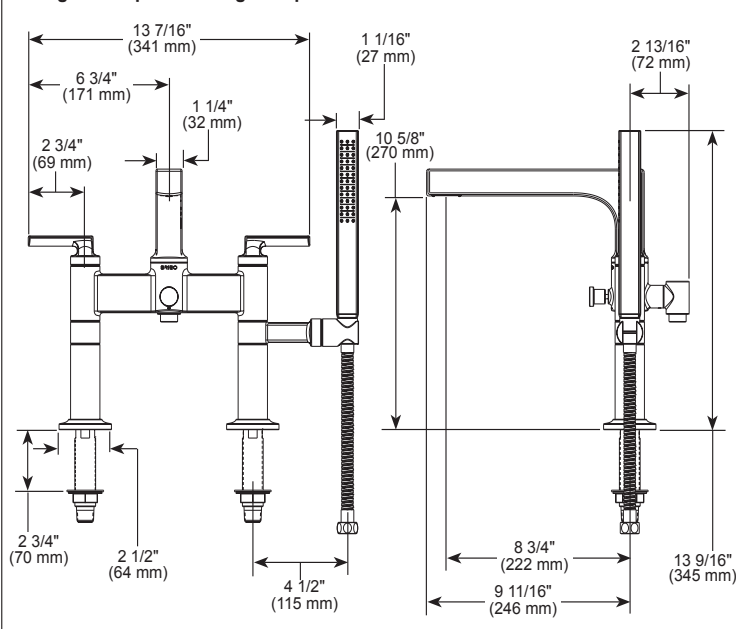

▲ Désigne le suffixe approprié de la finition

Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

BSP-B-T70306 Rev. D

SPÉCIFICATIONS STANDARDS :

- Débit maximal de la douchette: 1,75 gpm à 80 psi, 6,6 L/min à 550 kPa
- Débit du bec jusqu'à 10 gal./min à 60 psi, 37,8 L/min à 410 kPa
- Construction en laiton massif
- Colonnes montantes isolées disponibles pour contrôler la condensation et la chaleur en surface
- Boyau fini métallique extensible de 60 po (1524 mm) à 82 po (2083 mm)
- Soupapes de contrôle en céramique à haut débit
- Disponible avec poignées à levier, à bouton et en forme de croix
- Inverseur à réencclenchement automatique
- Conception à deux colonnes, 8 po (203 mm) centre à centre
- Drain non inclus
- Colonnes montantes isolées disponibles pour contrôler la condensation et la chaleur en surface
- Nécessite le quincaillerie d'installation
 - T71764-▲ raccords de montage mural
 - T71765-▲ colonnes montantes pour montage sur plan
 - T71766-▲ colonnes montantes pour installer sur le plancher
- La configuration de montage au sol nécessite la plomberie brute pour compléter l'installation :
 - R70200-WS avec arrêts intégrés
 - R70200 sans arrêts, offre un débit maximal
- Ensemble d'accessoires optionnel 695506

GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée.

AVERTISSEMENT : Risque de blessures corporelles. Ne pas utiliser le robinet de baignoire comme barre d'appui ou de soutien. Installer ce produit conformément au guide d'installation.







CONFORME À :

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense^{MD} - S'applique uniquement à T70306-▲, T70307-▲ et T70308-▲
- ICC / ANSI A117.1 - Contrôle de la soupape seulement

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

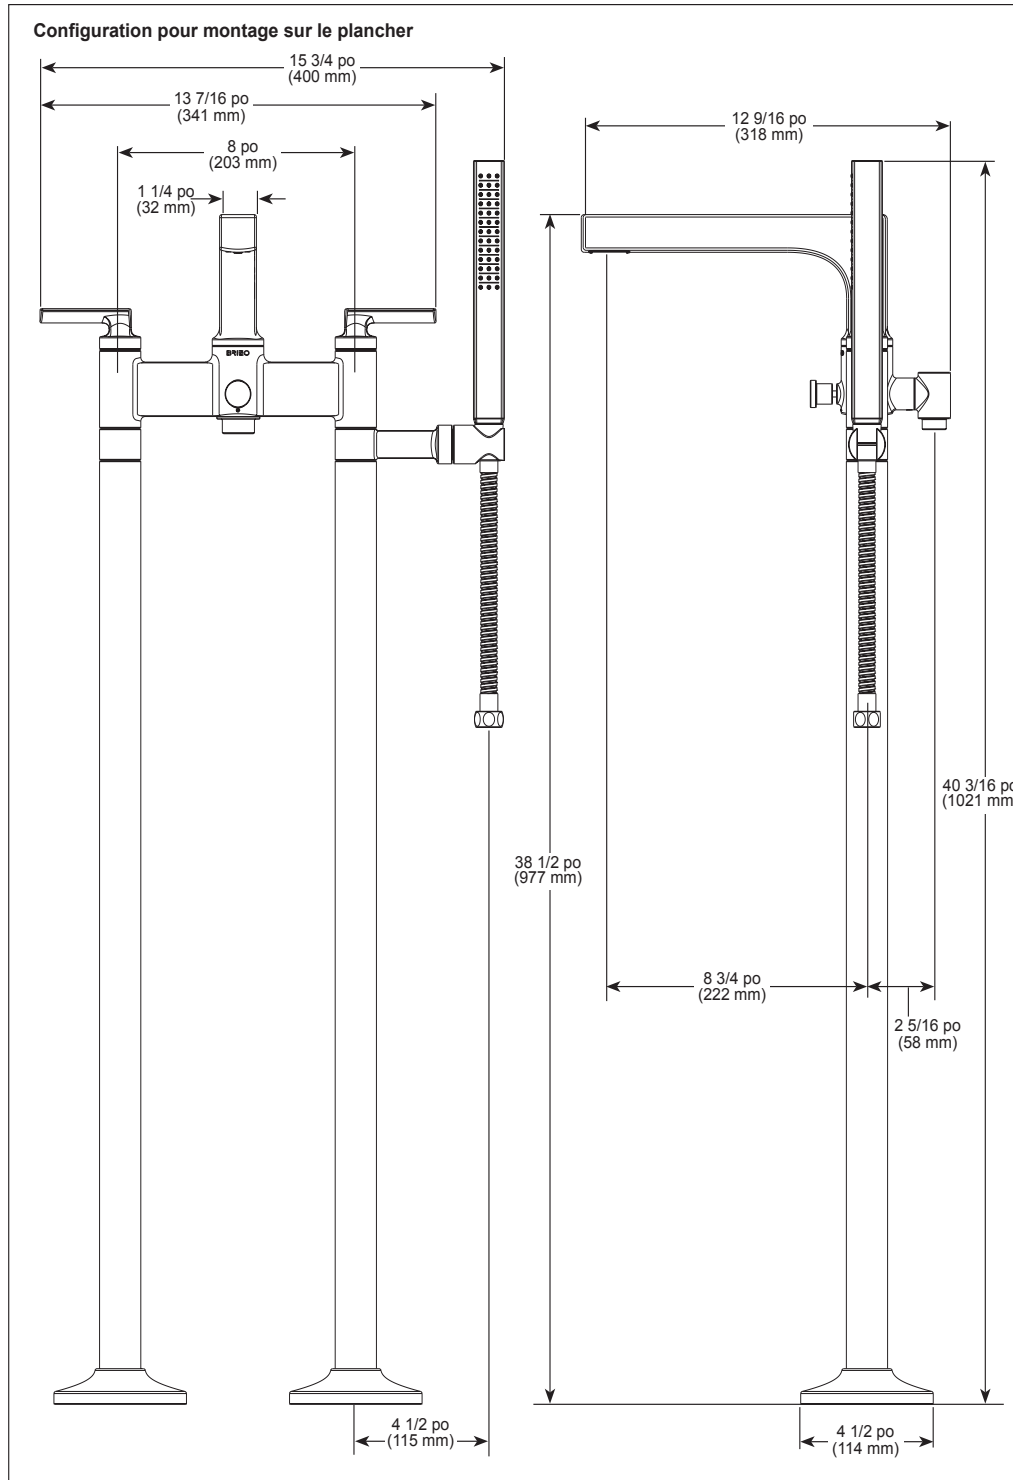

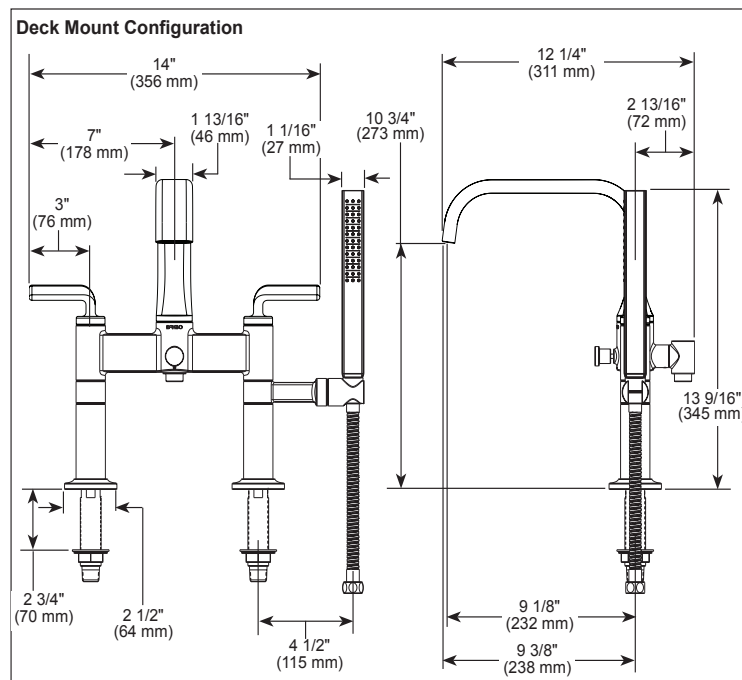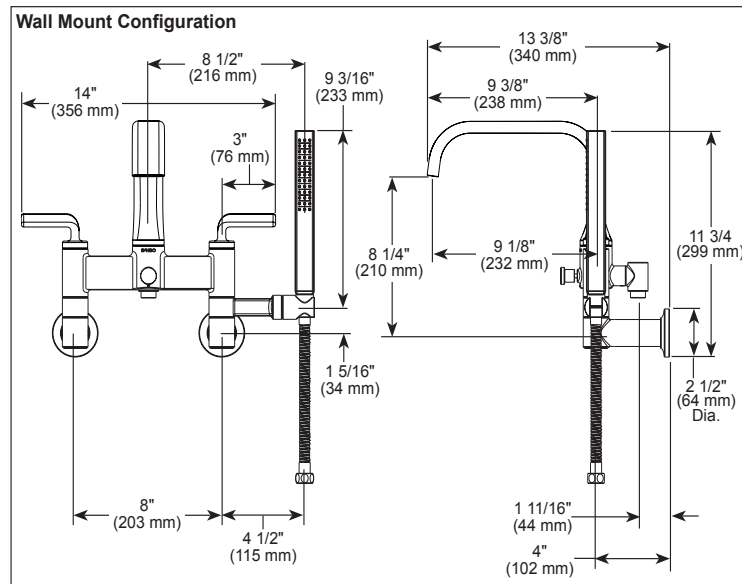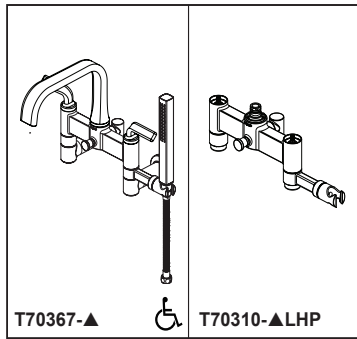

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T70367 Rev. C

BRIZO®

TWO HANDLE WALL, DECK, AND FLOOR MOUNT TUB FILLER

■ Allaria® Bath Collection

■ Wall, Deck or Floor Mount

STANDARD SPECIFICATIONS:

- Hand shower max. flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa, certified dual check valves in hand shower
- Spout flow up to 11 gpm @ 60 psi, 41.6 L/min @ 410 kPa
- Solid brass construction
- Indexing hand shower holder with full rotation
- 60"-82" stretchable finished metal hose
- High flow ceramic control valves
- Auto resetting diverter
- Dual column design on 8" center-to-center
- Drain not included
- Insulated floor risers available to control surface condensation and heat
- Requires mounting hardware:
 - T71764-▲ wall mount unions
 - T71765-▲ deck mount risers
 - T71766-▲ floor mount risers
- Floor mount configuration requires rough-in to complete installation:
 - R70200-WS with integrated stops
 - R70200 without stops, provides maximum flow
- Optional accessory kit 695506

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

WARNING: Risk of personal injury. Do not use the tub filler as a grab bar or support bar. Install this product according to the installation guide.







COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - Applies to T70367-▲ only
- ICC/ANSI A117.1 - Valve control only

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

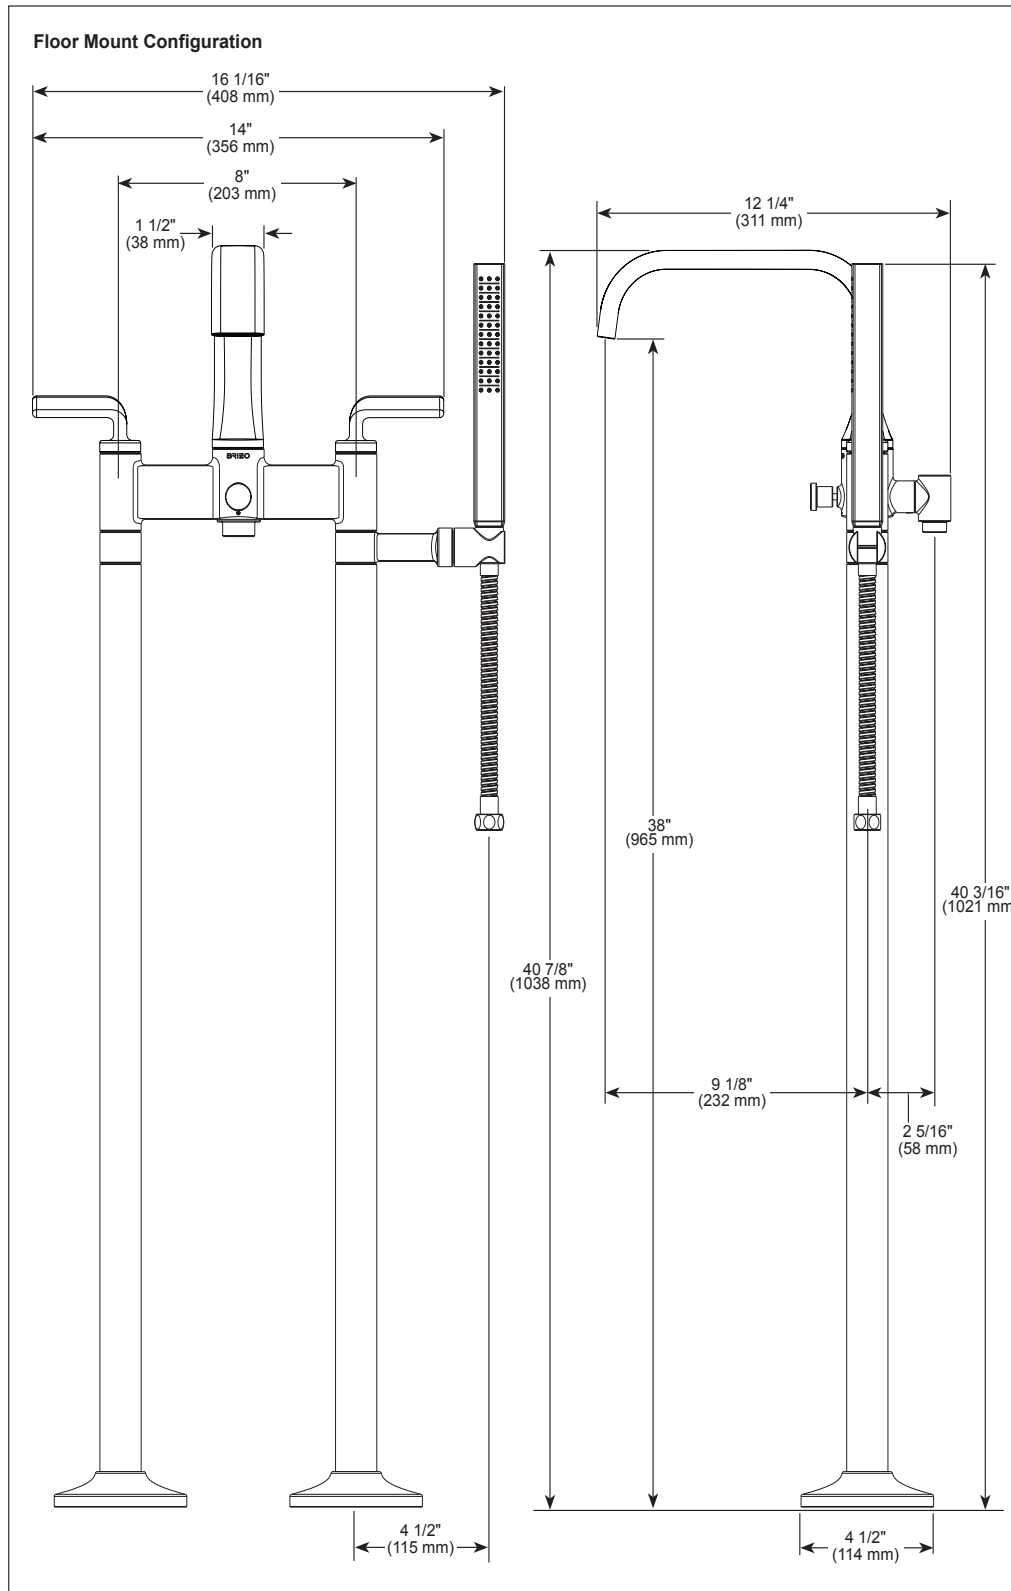

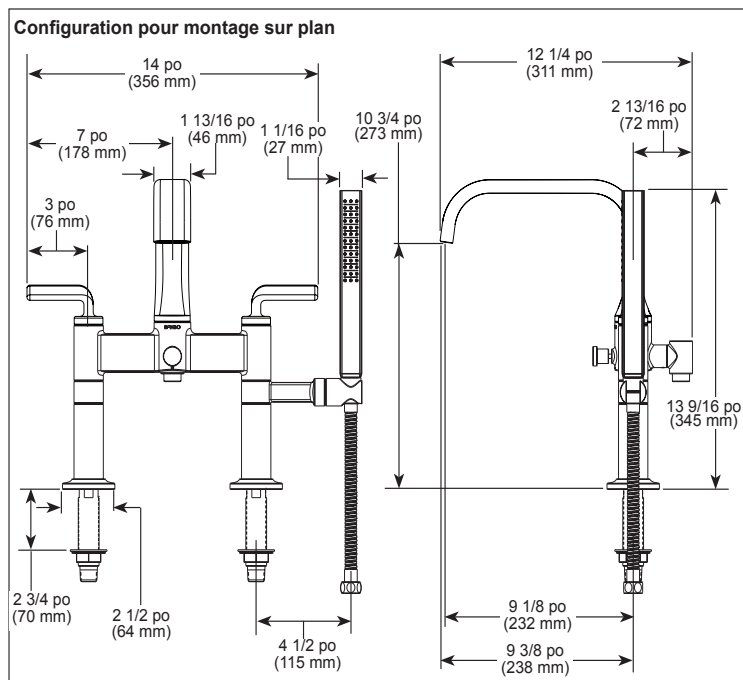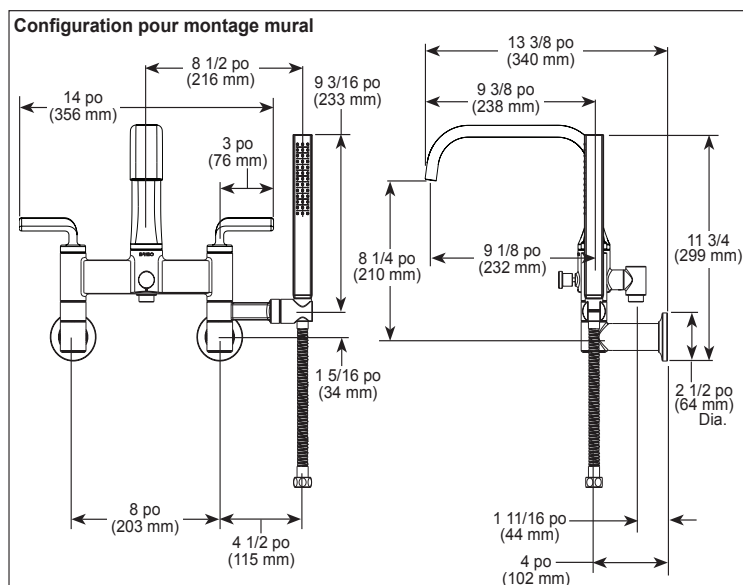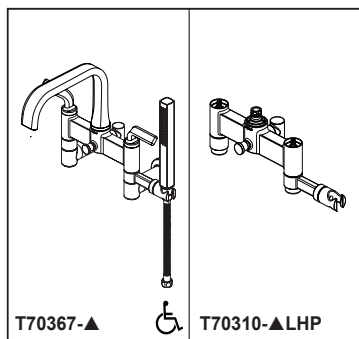

▲ Désigne le suffixe approprié de la finition

Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

BSP-B-T70367 Rév. C

BRIZO^{MD}

ROBINET DE BAIGNOIRE À DEUX POIGNÉES, INSTALLÉ SUR LE PLANCHER, SUR PLAN ET AU MUR

■ Collection Allaria^{MD} de salle de bain

■ Installé au mur, sur plan ou sur le plancher

SPÉCIFICATIONS STANDARDS :

- Débit maximal de la douche 1,75 gpm à 80 psi, 6,6 L/min à 550 kPa, clapets anti-retour doubles certifiés dans la douche
- Débit du bec jusqu'à 11 gpm à 60 psi, 41,6 L/min à 410 kPa
- Construction en laiton massif
- Support de douche indexable avec rotation complète
- Boyau fini métallique extensible de 60 po (1524 mm) à 82 po (2083 mm)
- Soupapes de contrôle en céramique à haut débit
- Inverseur à réenclenchement automatique
- Conception à deux colonnes, 8 po (203 mm) centre à centre
- Drain non inclus
- Colonnes montantes isolées disponibles pour contrôler la condensation et la chaleur en surface
- Nécessite le quincaillerie d'installation
 - T71764-▲ raccords de montage mural
 - T71765-▲ colonnes montantes pour montage sur plan
 - T71766-▲ colonnes montantes pour installer sur le plancher
- La configuration de montage au sol nécessite la plomberie brute pour compléter l'installation :
 - R70200-WS avec arrêts intégrés
 - R70200 sans arrêts, offre un débit maximal
- Ensemble d'accessoires optionnel 695506

GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée.

AVERTISSEMENT : Risque de blessures corporelles. Ne pas utiliser le robinet de baignoire comme barre d'appui ou de soutien. Installer ce produit conformément au guide d'installation.





CONFORME À :

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense^{MD} - S'applique uniquement à T70367-▲
- ICC / ANSI A117.1 - Contrôle de la soupape seulement

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

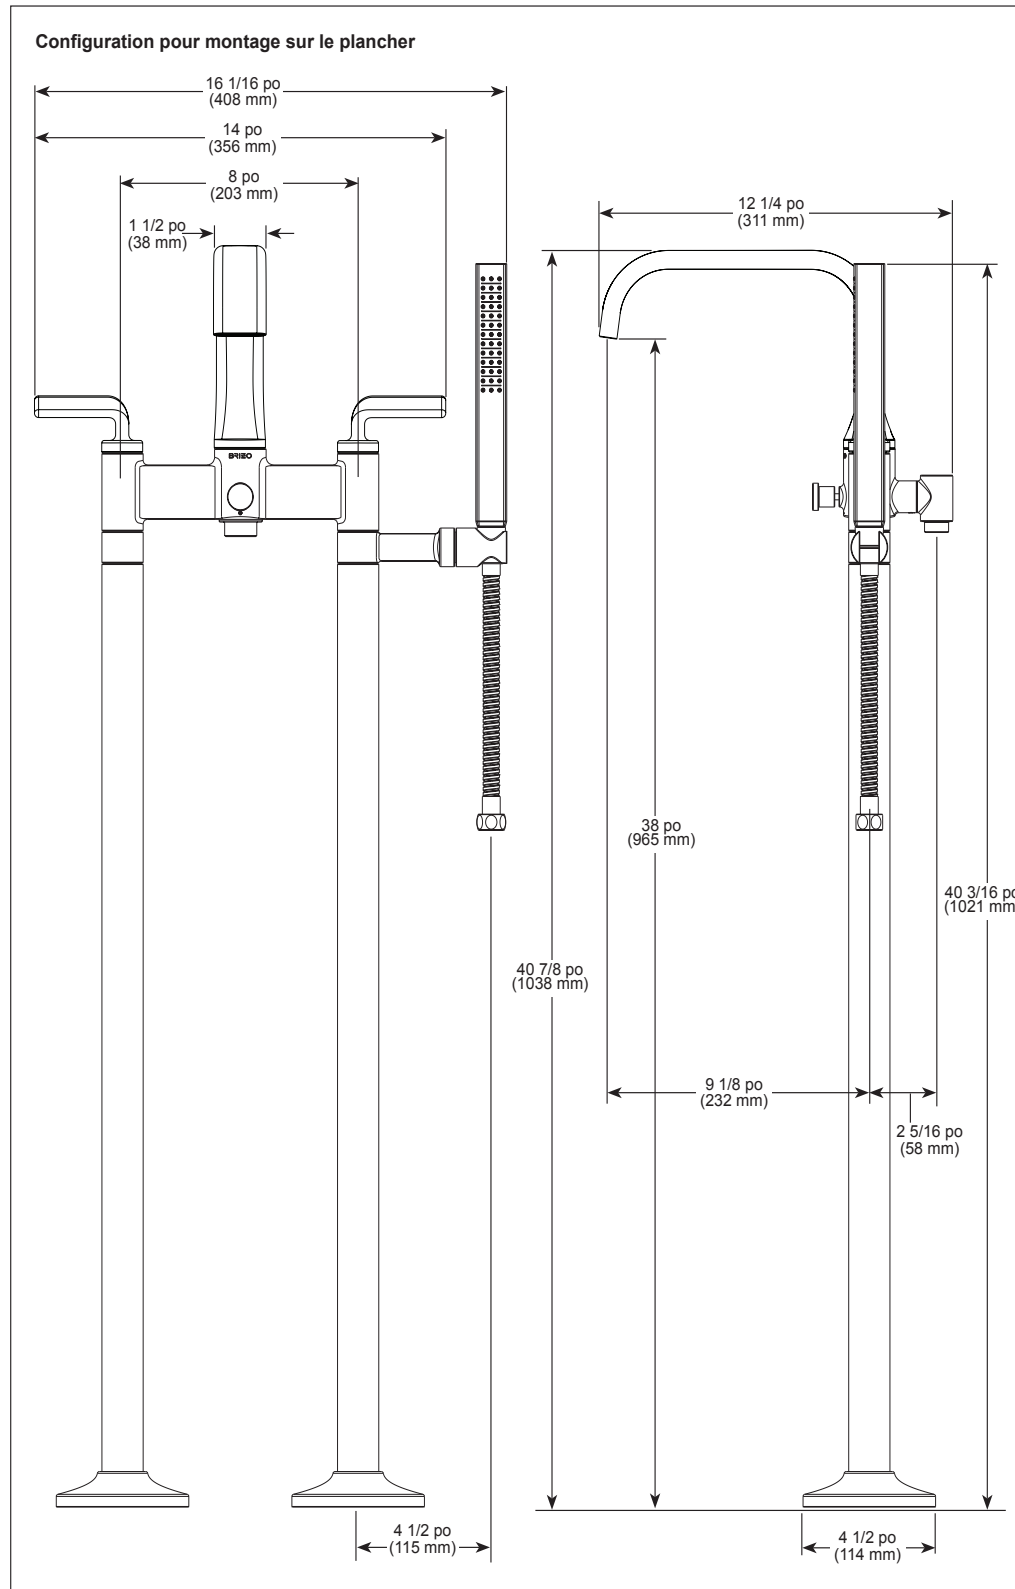

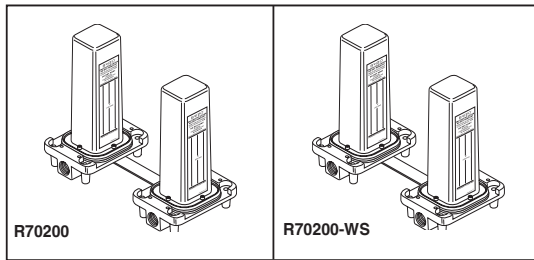

BRIZO®

TWO HOLE FREESTANDING FLOOR MOUNTED TUB FILLER ROUGH-IN

- R70200
- R70200-WS (With Stops)

STANDARD SPECIFICATIONS



- 1/2" NPT female inlets.
- Forged brass body.
- Available with integrated stops (R70200-WS).
- Innovative mounting system (patent pending) provides for simple stable installation.
- Spacing plate pre-assembled to ensure 8" spread.
- Accommodates finished floor thickness up to 4".
- Vertical spout height remains constant to finished floor.
- Pre-assembled test caps allow air or water pressure testing without trim.
- Pre-assembled protective plasterguards with information label indicating finished floor location.
- Pre-assembled gaskets to isolate living space.
- Rigid galvanized installation template included (not shown).
- Refer to product installation instructions.
- Trim sold separately.

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1

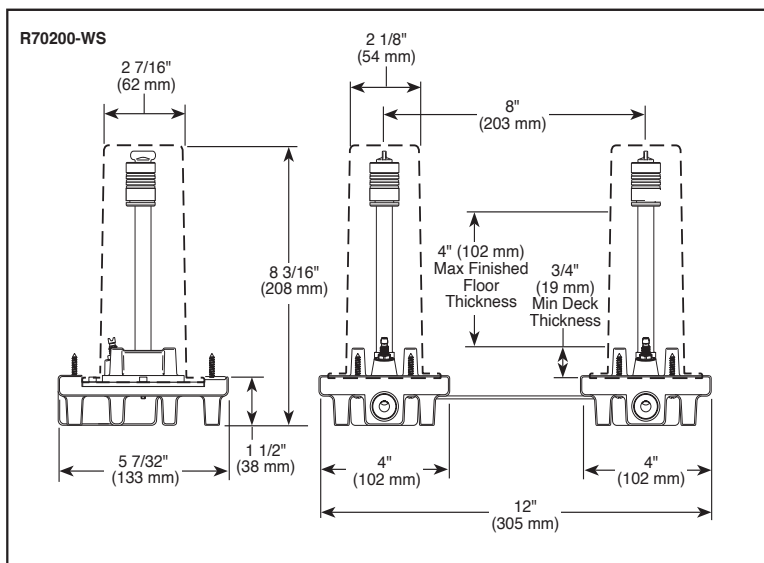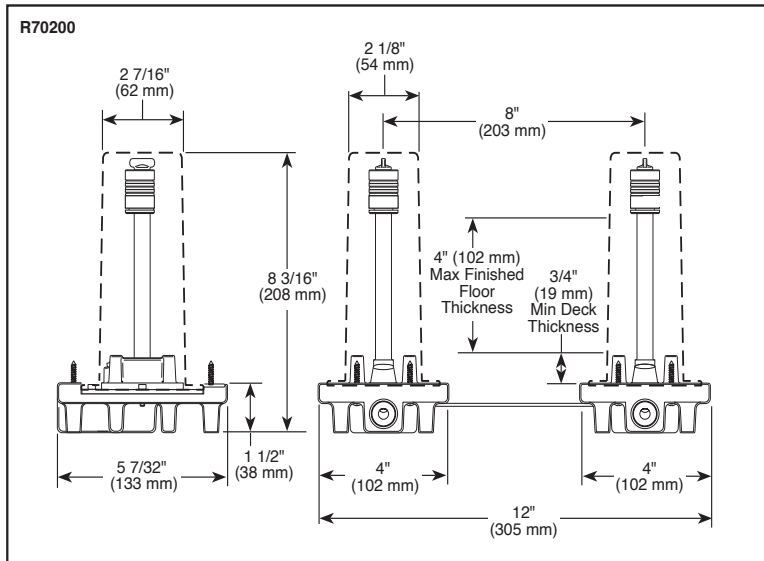

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R70200 Rev. C

Brizo Kitchen & Bath Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company



BRIZO®

SENSORI® THERMOSTATIC VALVE TRIM

- Kintsu® & Allaria® Bath Collection
- Thermostatic Control Trim

FEATURES:

- Sensori® thermostatic control

STANDARD SPECIFICATIONS:


- Must also order R35000-WS Sensori® thermostatic valve rough
- Includes Sensori® thermostatic cartridge
- Thermostatic wax element maintains the outlet temp to +/- 3.6° F
- Handle controls temperature only; must be used with one or more Sensori® volume controls
- Field adjustable to limit rotation into hot water zone
- All parts are replaceable from the front of the valve
- Adjusts for up to 5/8" wall thickness. Optional extension kit (RP101600) available
- Must order handles separately. See handle options below.

WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- ICC/ANSI A117.1

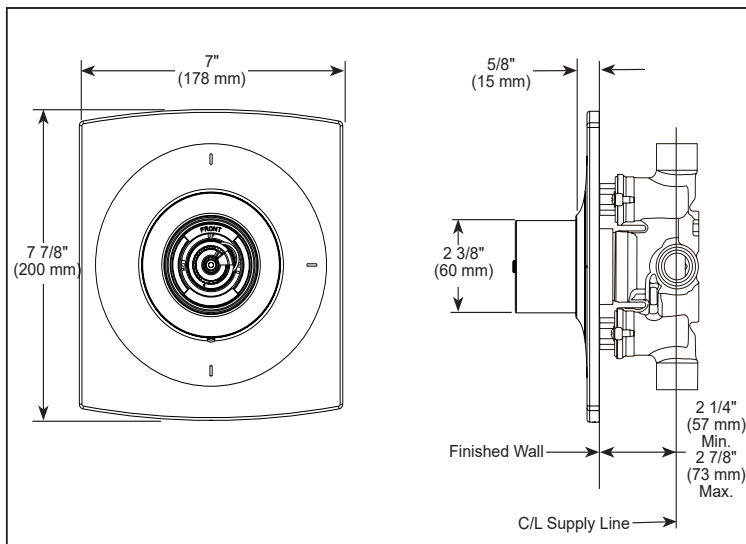


HL6606-GLL Lever Handle - Kintsu®

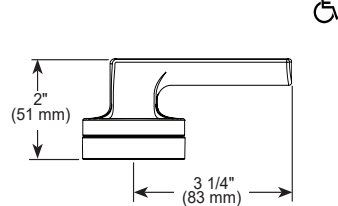


HK6606-GLL Knob Handle - Kintsu®

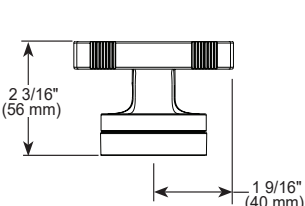

HL6667-GLL Twist Lever Handle - Allaria®

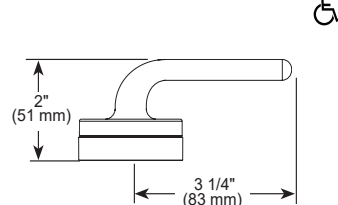

RP101600 Available Extension Kit

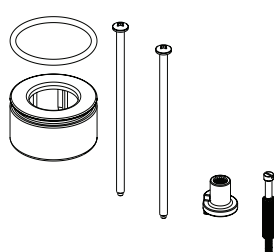


*Depending on the location of valve within the wall and wall thickness an optional extension kit (RP101600) can provide an additional 1 3/4" of wall thickness.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T66T006-LHP Rev. D

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company



BRIZO®

SENSORI® CUSTOM SHOWER ROUGH VALVE BODY

- R35000-WS
- Thermostatic Temperature Control
- Rough 3/4" Rough-In

STANDARD SPECIFICATIONS:

- Forged brass body.
- Can be tested with air (200 PSI) or water (300 PSI) without valve, using supplied test cap.
- For use with Sensori® thermostatic trim.
- Cartridge ships with trim.
- Includes stops.


WARNING: No back to back installation is allowed with this product.

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

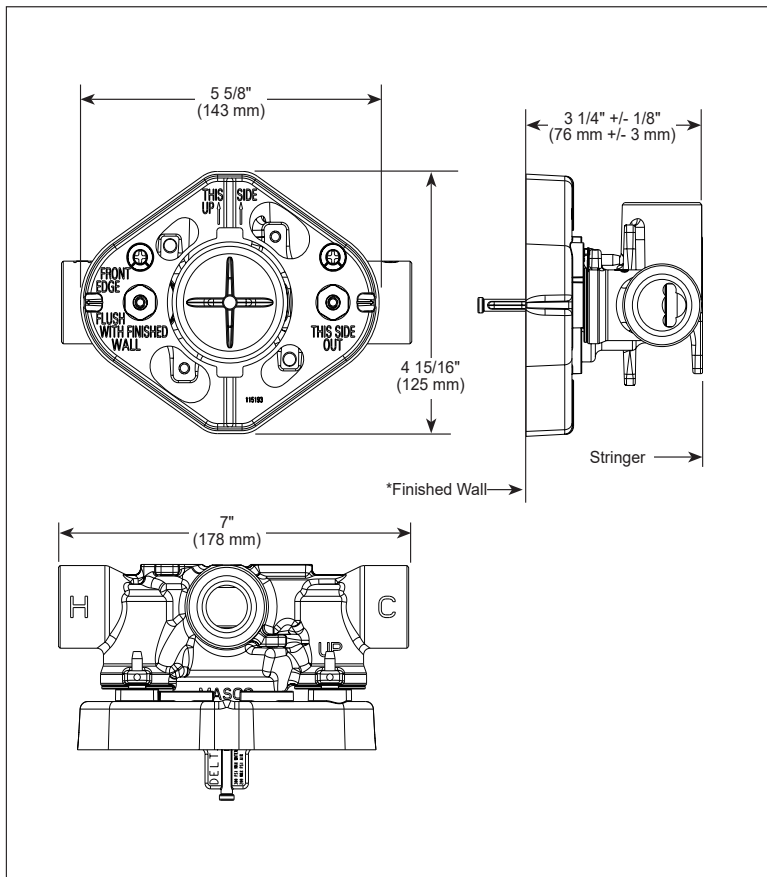

Extension kits available



Visit our website at www.brizo.com for specification sheet for trim model to identify appropriate RP.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R35000-WS Rev. C

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

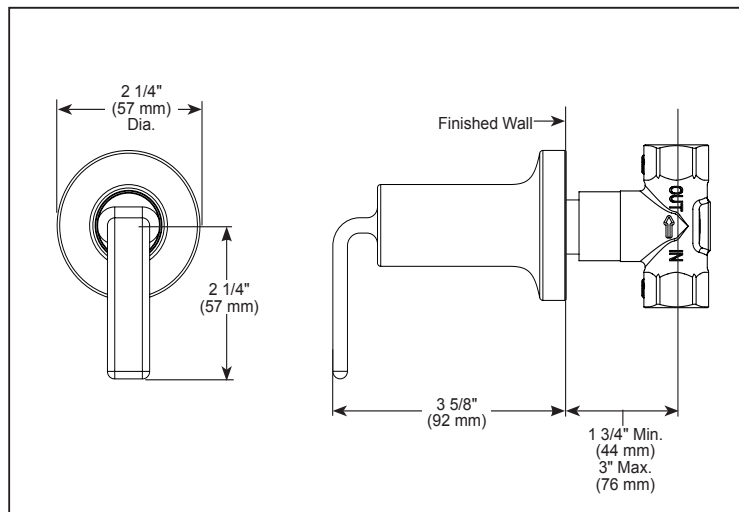

▲ Designate proper finish suffix

BRIZO®

SENSORI® VOLUME CONTROL TRIM

- Allaria® Bath Collection
- Volume Control Trim

STANDARD SPECIFICATIONS

- Must also order R35600 Rough-In.
- 90° handle rotation controls volume only.
- Volume control flows up to 16.2 gpm @ 60 psi
- Maximum flow 8.2 gpm @ 60 psi per volume control when paired with Sensori Thermostatic trim.
- Volume controls are required for every outlet and every set of body sprays (up to max flow).
- Adjusts for wall thickness variations.
- All parts are replaceable from the front.
- Recommended working pressure of 45-80 PSI.
- Volume control only; must be used with temperature control device.
- Rough can accommodate up to 3 1/4" wall thickness. NOTE: some applications may require stem extender RP100304.

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ICC/ANSI A117.1

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

Brizo Kitchen & Bath Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

BSP-B-T66667 Rev. C

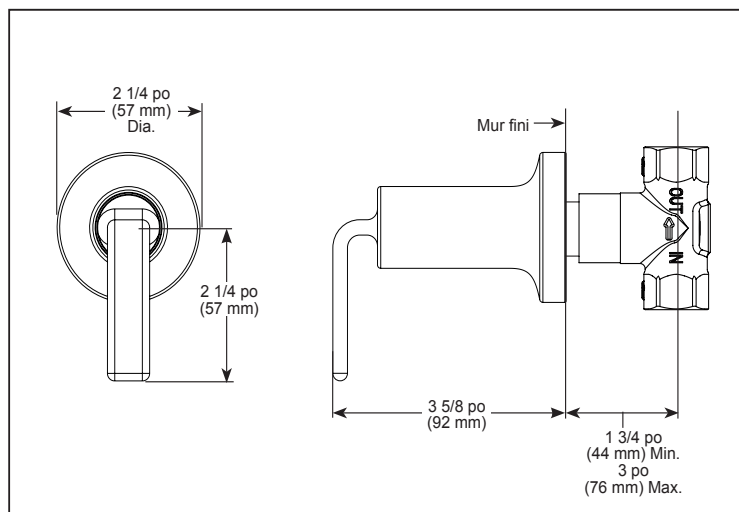

▲ Désigne le suffixe approprié de la finition

BRIZO^{MD}

GARNITURE DE RÉGULATEUR DE DÉBIT SENSORI^{MD}

- Collection Allaria^{MC} pour salle de bain
- Garniture de régulateur de débit

SPÉCIFICATIONS STANDARDS

- Il faut également commander la plomberie brute R35600.
- La rotation de la poignée à 90° contrôle uniquement le débit.
- Régulateur de débit permet un débit jusqu'à 16,2 gpm à 60 psi (61 L/min)
- Débit maximal de 8,2 gpm à 60 psi (31 L/min) par régulateur de débit lorsqu'il est associé à la garniture thermostatique Sensori.
- Les régulateurs de débit sont nécessaires pour chaque sortie et chaque ensemble de pulvérisateurs corporels (jusqu'à un débit maximum).
- S'adapte aux variations d'épaisseur du mur.
- Toutes les pièces sont remplaçables par l'avant.
- Pression de service recommandée de 45 à 80 PSI.
- Régulateur de débit uniquement ; doit être utilisée avec un dispositif de contrôle de température.
- La plomberie brute peut accueillir une épaisseur de mur allant jusqu'à 3 1/4 po (82,5 mm).
REMARQUE : certaines applications peuvent nécessiter une rallonge de tige RP100304.

GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée.

CONFORME À :



- ASME A112.18.1 / CSA B125.1
-  ICC/ANSI A117.1

Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

BSP-B-T66667 Rév. C

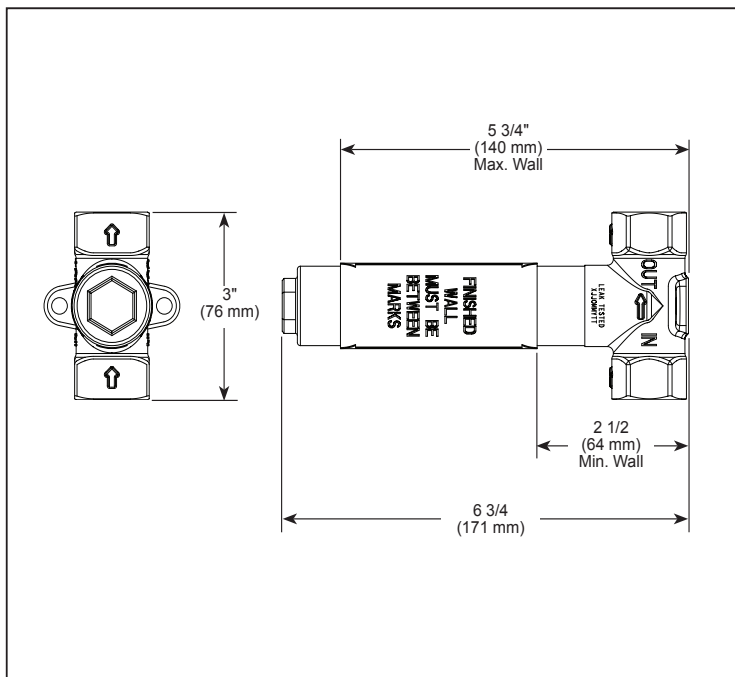

BRIZO®

SENSORI® CUSTOM SHOWER ROUGH

- Volume Control Rough
- 3/4" Rough-In

STANDARD SPECIFICATIONS

- Forged brass body
- Includes ceramic cartridge assembly
- 90° rotation
- Integrated brass stem
- Solid brass extension sleeve
- Provides precise handle alignment
- Integrated friction bearing provides smooth handle operation
- All parts are replaceable from the front
- Recommended working pressure of 45-80 psi
- Volume control flows up to 16.2 gpm @ 60 psi
- Maximum 9.6 gpm @ 60 psi per volume control when paired with Sensori Thermostatic trim
- Volume controls are required for every outlet and every set of body sprays (up to max flow)
- Volume control only. Must be used with separate temperature control device.
- Rough can accommodate up to 3 1/4" wall thickness.
NOTE: some applications may require stem extender RP100304.

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R35600 Rev. E

Brizo Kitchen & Bath Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

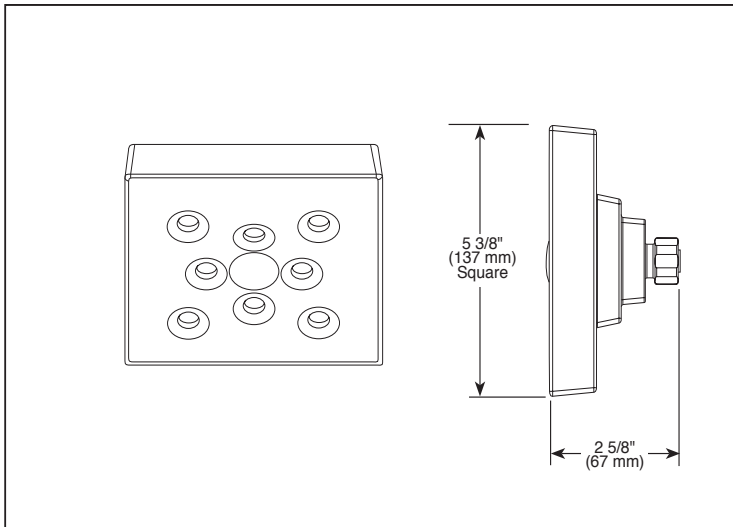

▲ Designate proper finish suffix

BRIZO®

SHOWER HEAD

■ Siderna® Bath Collection

FEATURES:

- H₂Okinetic® Technology

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Finished sprayface matches shell finish
- Shower head has 1/2"-14 NPSM female connection
- Wrench flats for tightening
- Shower head ball nut pivots and rotates

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorize representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-87380 Rev. E

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

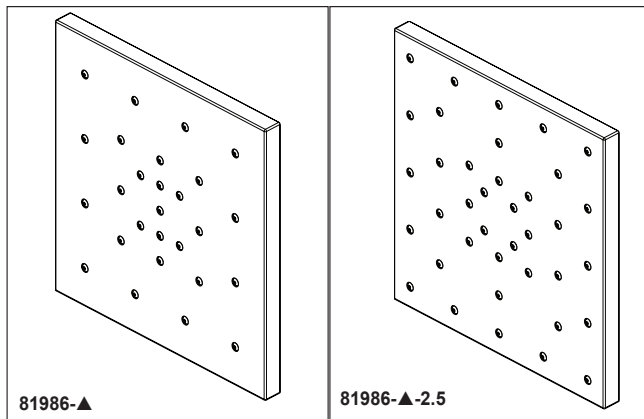

BRIZO®

H₂OKINETIC® RAINCAN SHOWER HEAD

■ Single-Function Square Raincan Shower Head

FEATURES:


- Touch-Clean® Spray Holes
- H₂Okinetic® UltraSoak Spray

STANDARD SPECIFICATIONS:

- Max. flow rate 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (81986-▲-2.5)
- Max. flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa (81986-▲)
- Standard 1/2" pipe fittings. Wrench flats for tightening
- Shower head is intended for overhead raincan orientation. Ball connector rotates and pivots.
- Finished spray face

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

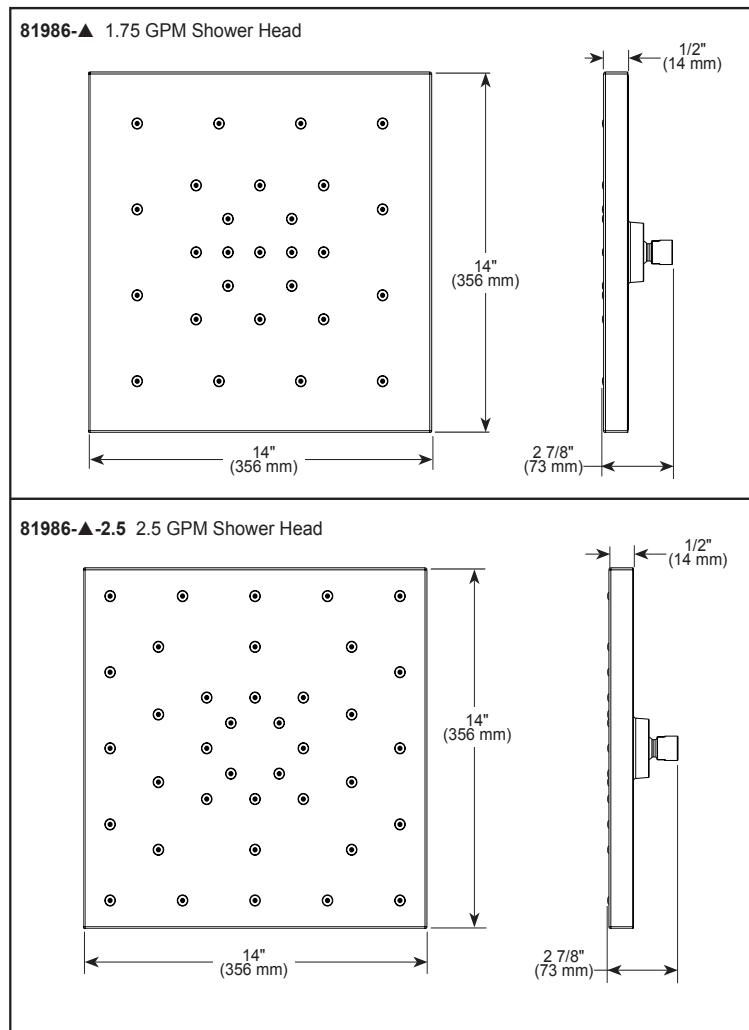

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - Applies to 81986-▲ only



▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-81986 Rev. C

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

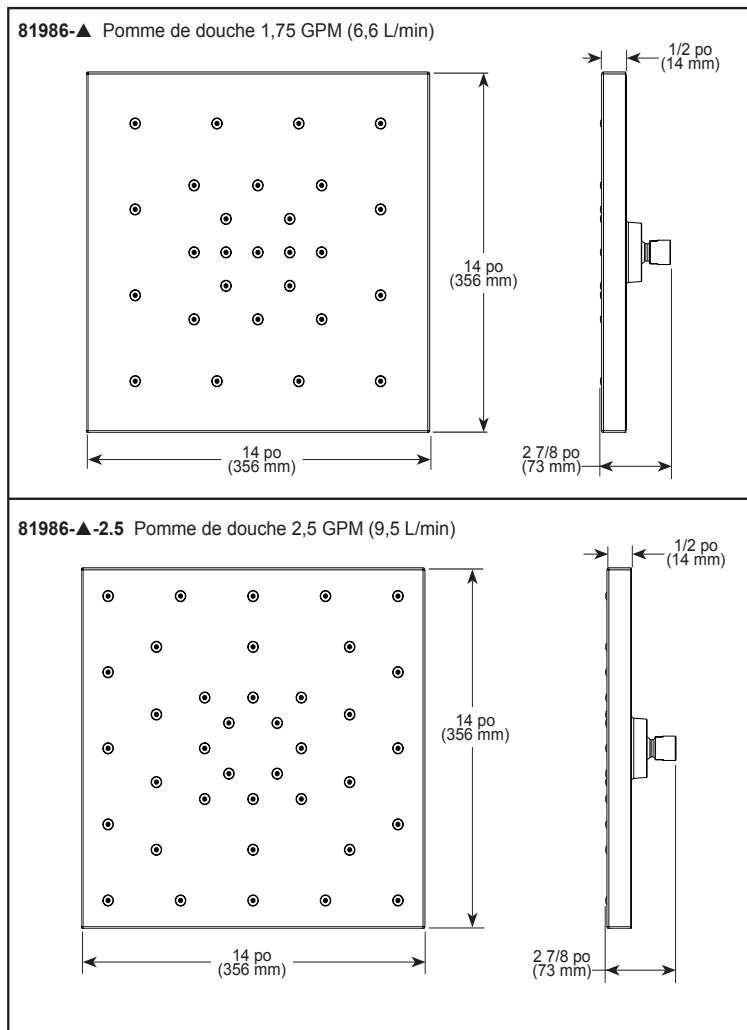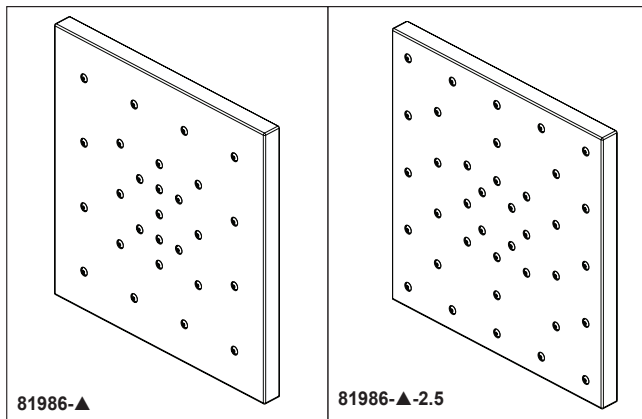

▲ Désigne le suffixe approprié de la finition

Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

BSP-B-81986 Rev. C

BRIZO^{MD}

POMME DE DOUCHE À JET PLUIE H₂OKINETIC^{MD}

■ Pomme de douche carré à fonction unique

CARACTÉRISTIQUES :

- Orifices de pulvérisation Touch-Clean^{MD}
- Jet H₂Okinetic^{MD} UltraSoak

SPÉCIFICATIONS STANDARDS :

- Débit maximal 2,5 gpm à 80 psi, 9,5 L/min à 550 kPa (81986-GL-2.5)
- Débit maximal 1,75 gpm à 80 psi, 6,6 L/min à 550 kPa (81986-GL)
- Raccord de tuyau standard de 1/2 po (13 mm). Méplats de clé pour le serrage.
- La pomme de douche est conçue uniquement pour installation au plafond. Le connecteur à bille pivote et tourne.
- Surface de jet finie

GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée.




CONFORME À :

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense^{MD} - S'applique uniquement au 81986-GL

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

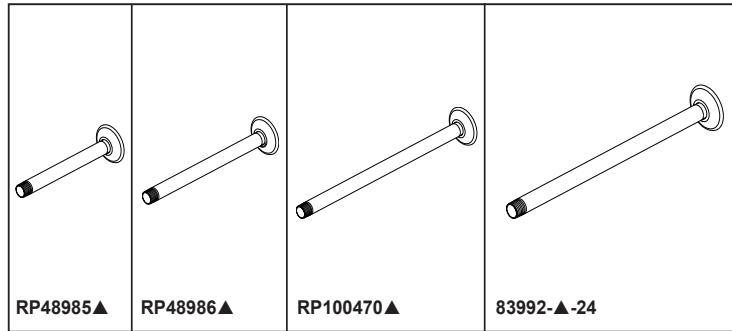

BRIZO®

CEILING MOUNT SHOWER ARMS AND FLANGE

STANDARD SPECIFICATIONS:





- 1/2" NPT threads
- Solid brass construction
- Adjustable flange is held in place on shower arm by rubber friction ring

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

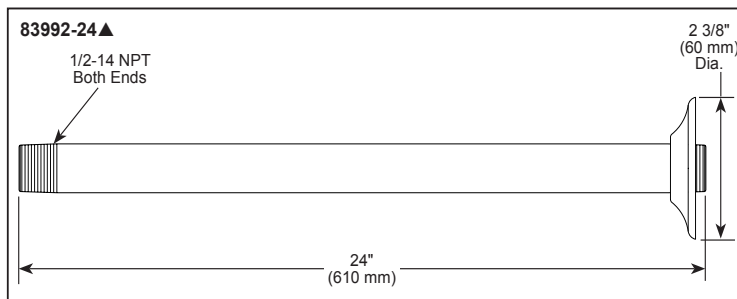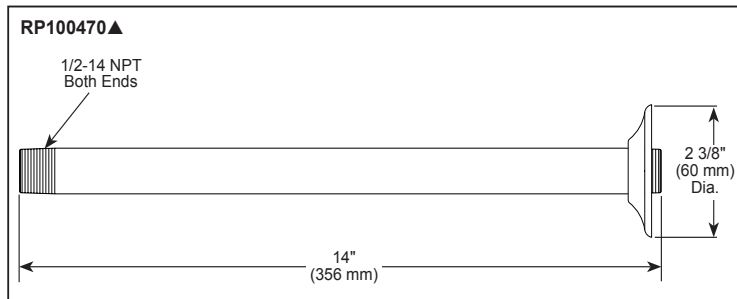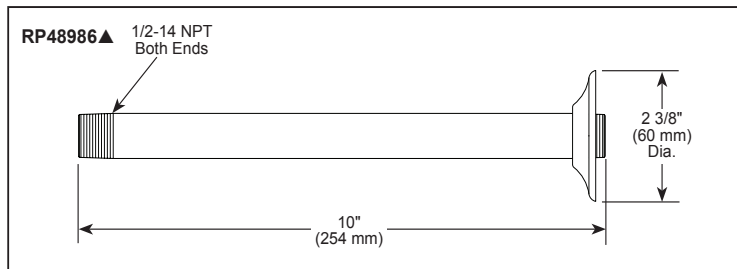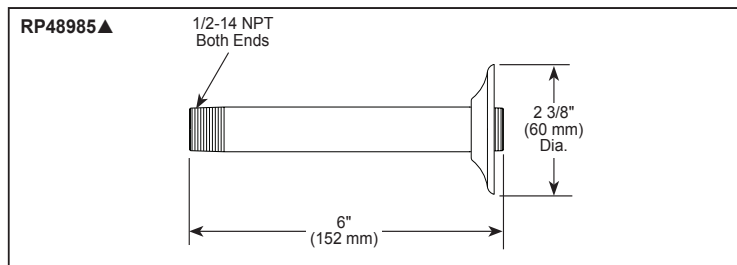


▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.


BSP-B-RP48985 Rev. G

Brizo Kitchen & Bath Faucet Company


55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

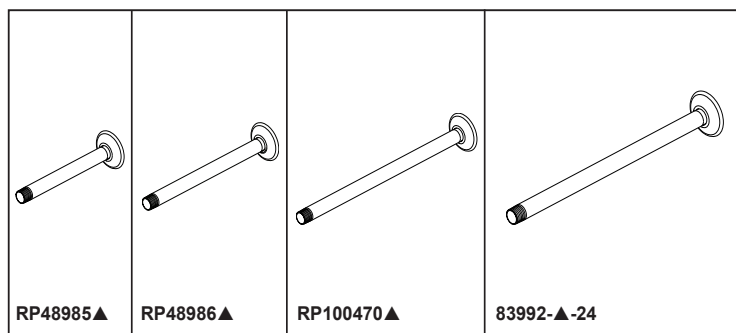


RP48985▲

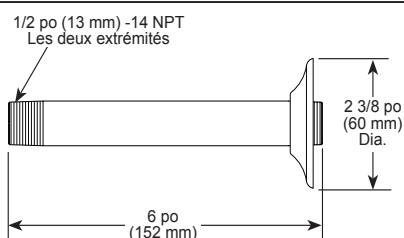


RP48986▲

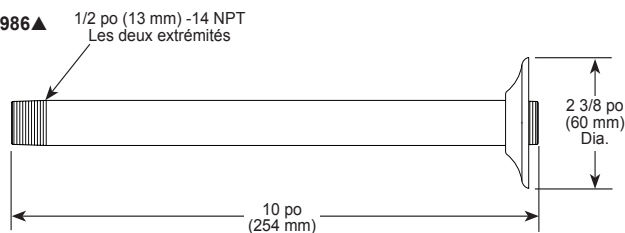

RP100470▲

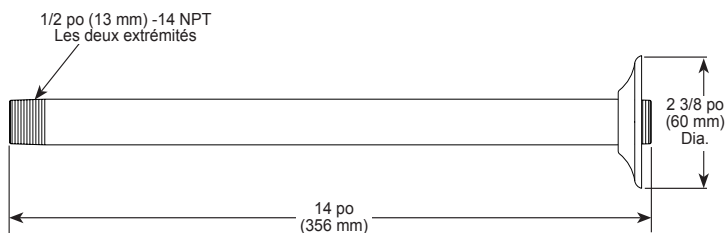

83992-24▲

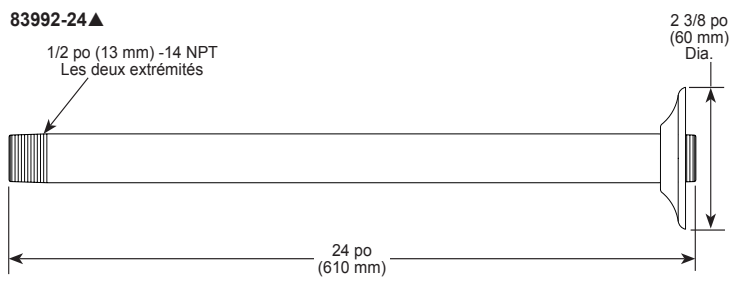

▲ Désigne le suffixe approprié de la finition

Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

BSP-B-RP48985 Rév. G

BRIZO^{MD}

BRAS ET BRIDE DE DOUCHE INSTALLÉS AU PLAFOND

SPÉCIFICATIONS STANDARDS :

- Filetage NPT 1/2 po (12,7 mm)
- Construction en laiton massif
- La bride réglable est maintenue en place sur le bras de douche par une bague de friction en caoutchouc

GARANTIE



- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée.

CONFORME À :

- ASME A112.18.1 / CSA B125.1

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

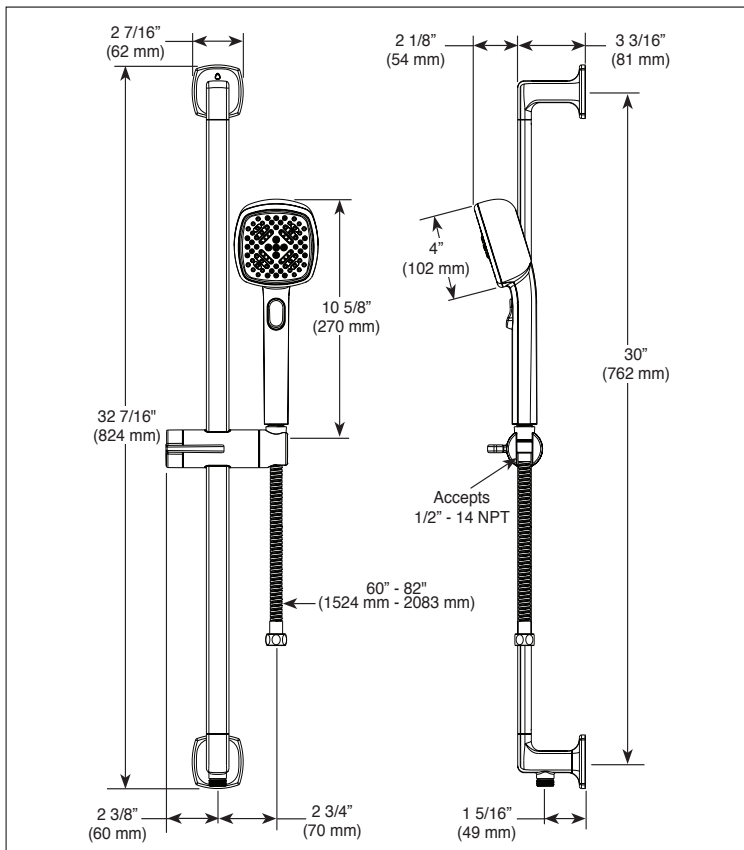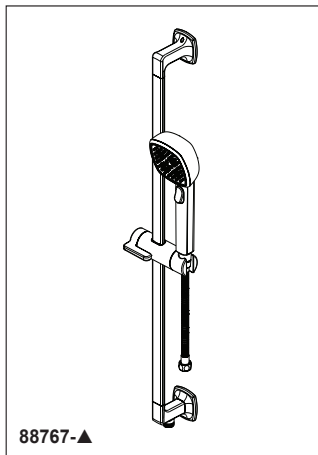

▲ Designate finish suffix

BRIZO®

HAND SHOWER W/ SLIDE BAR

- Allaria™ Bath Collection
- 4-Function Hand Shower

FEATURES:

- Touch-Clean® Spray Holes

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Wall bar with adjustable slide (allows for adjustable shower height). Not to be used as a grab bar.
- 60" - 82" (1524 mm - 2083 mm) stretchable finished metal hose
- Wall bar includes integrated elbow for hose connection
- Integrated elbow has standard 1/2"-14 NPT supply fitting
- Certified dual check valves
- 4 spray settings: Cascade, Full Spray, Shampoo Spray and Pause. Pause is a non-positive shut-off.

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorize representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.





COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ♦
- EPA WaterSense®
- ICC/ANSI A117.1
- ♦ Your Brizo hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

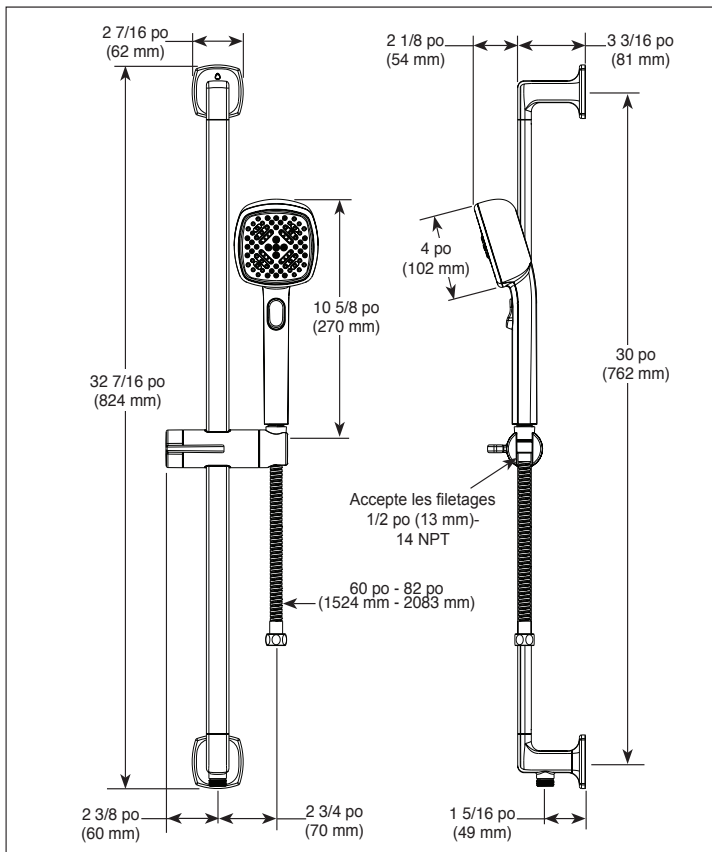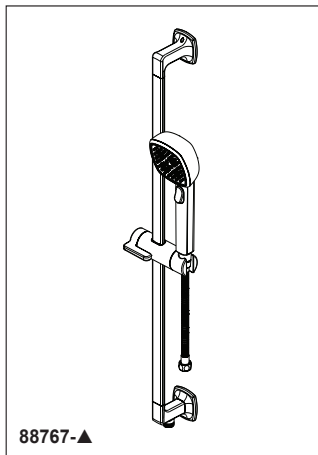

▲ Désigne le suffixe approprié de la finition

BRIZO^{MD}

DOUCHETTE AVEC BARRE COULISSANTE

- Collection Allaria^{MC} pour salle de bain
- Douchette à 4 fonctions

CARACTÉRISTIQUES :

- Orifices de pulvérisation Touch-Clean^{MD}

SPÉCIFICATIONS STANDARDS :

- Débit maximal de 1,75 gal./min à 80 psi, 6,6 L/min à 550 kPa
- Barre murale avec glissière réglable (permet de régler la hauteur de la douche). Ne pas utiliser comme barre d'appui.
- Boyau à extensible en métal fini de 60 à 82 po (1524 mm à 2083 mm)
- La barre murale comprend un coude intégré pour le raccordement du boyau
- Le coude intégré possède un raccord d'alimentation standard de 1/2 po (13 mm) -14 NPT
- Clapets anti-retour doubles certifiés
- 4 réglages de jet : Cascade, jet complet, jet de rinçage du shampooing et pause. Pause est un arrêt non positif.

GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ♦
- EPA WaterSense^{MD}
- ICC/ANSI A117.1

- ♦ Votre douchette Brizo intègre un système de protection anti-refoulement qui a été testé conformément aux normes ASME A112.18.3 et ASME A112.18.1/CSA B125.1. Elle comprend deux clapets anti-retour certifiés en série, qui fonctionnent indépendamment et font partie intégrante de l'ensemble de la douchette, et ne peuvent pas être remplacés.

Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company

BSP-B-88767 Rév. C

KOHLER®

Clearflo | K-9136

Square design tile-in shower drain

Features

- Removable grid plate
- Reversible collar accommodates a variety of tile thicknesses
- 2" and 3" PVC connection



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Clearflo | K-9136
Square design tile-in shower drain

Codes/Standards

ASME A112.18.2/CSA B125.2

Material

- Brass and PVC construction
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Clearflo | K-9136
Square design tile-in shower drain

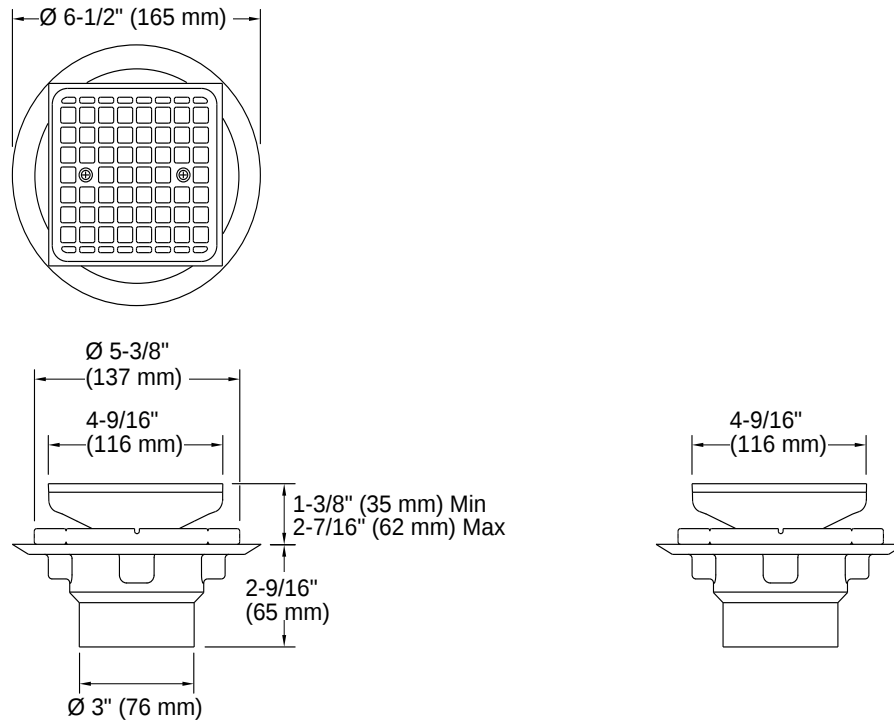

Installation

- Through-the-floor tile-in installation

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) glazed trapway
- Includes Impro® ReadyLatch® Quiet-Close™ toilet seat
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----|-------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | NY | Dune |
|  | 95 | Ice Grey |
|  | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ADA CSA B651 OBC

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Recommended Products/Accessories

1023457 Toilet Wax Ring And Hardware Kit
K-21710-L Left-hand trip lever
K-23726 Drain treatment
K-4108 Elongated bidet toilet seat with remote control
K-30780 Quiet-Close™ elongated toilet seat
K-5381 14" rough-in full skirt trap and attachment system
K-5383 10" rough-in full skirt trap and attachment system

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)
Bowl Shape:	Elongated
Waste Outlet:	Floor
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted
Water Surface Size:	9-1/8" x 8-1/2" (232 mm x 216 mm)
Rim to Water Surface:	6-3/8" (162 mm)

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure:	25 psi (172.4 kPa)
Minimum Flow Rate:	0.43 gpm (1.6 l/min)




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

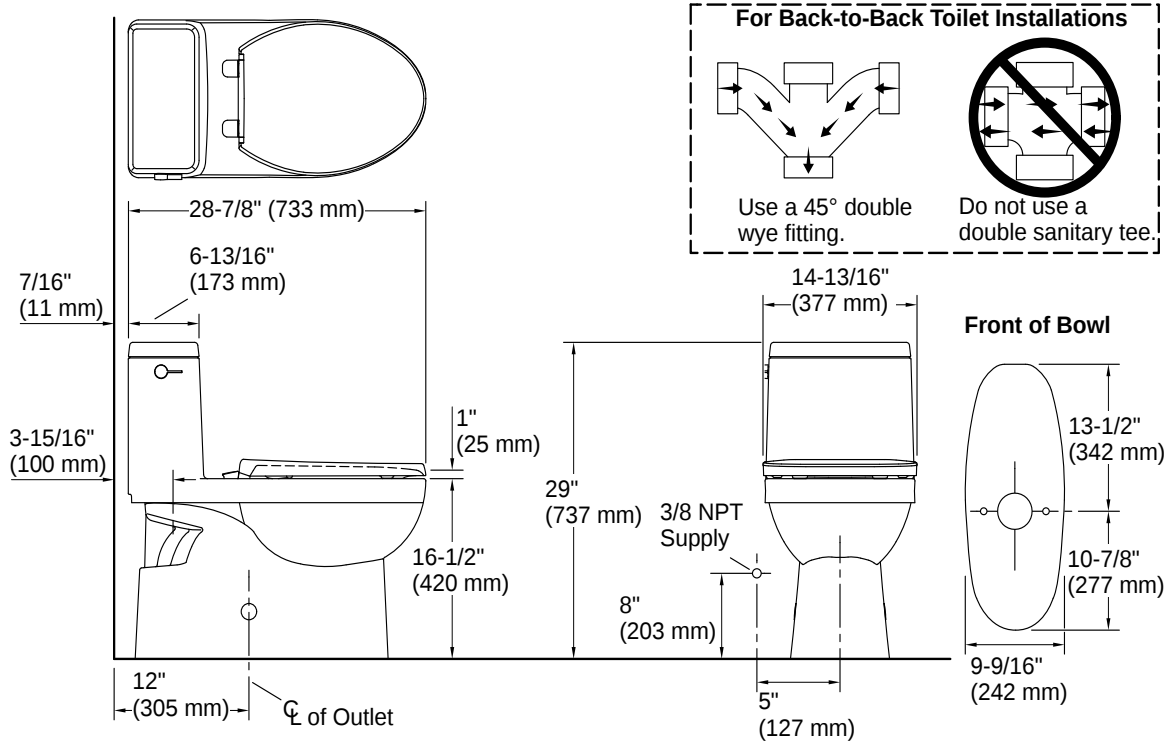

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Supply line sold separately

Installation Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

3

KOHLER®

Reach® | K-21710-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-78080 Reach™ toilet



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|-----|-------------------------------|
|  | CP | Polished Chrome |
|  | SN | Vibrant Polished Nickel |
|  | AF | Vibrant French Gold |
|  | BN | Vibrant Brushed Nickel |
|  | BV | Vibrant Brushed Bronze |
|  | BL | Matte Black |
|  | 2MB | Vibrant Brushed Moderne Brass |
|  | TT | Vibrant Titanium |
|  | BGP | Vibrant Brushed Graphite |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Reach® | K-21710-L
Left-hand trip lever

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Reach® | K-21710-L
Left-hand trip lever

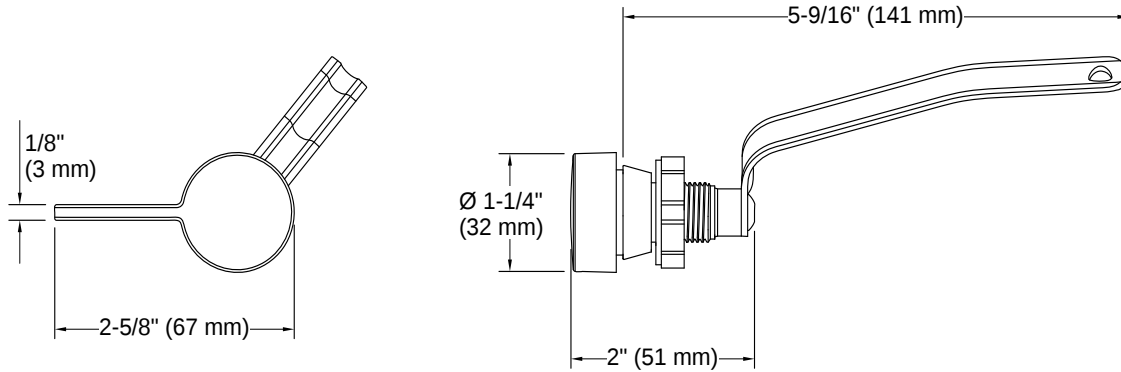

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER**

BATH 2 (FULL TILED SHOWER)


VENDOR PART	VENDOR	DESCRIPTION	PAGE
65067LF-GLCL-ECO	Brizo	Allaria 1 Hole Deck Mount Lavatory 1.2 Gpm Side Handle - Luxe Gold / Clear Acrylic	113
RP72414GL	Brizo	Push Button Pop Up With Overflow - Luxe Gold	114
K-20000-0	Kohler	Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White	115
T60P006-GLLHP	Brizo	Kintsu Pressure Balance Valve Only Trim Less Handle - Luxe Gold	118
HL60P67-GL	Brizo	Allaria Pressure Balance Trim Handle Kit Twist Lever - Luxe Gold	N/A
R60000-UNBX	Brizo	Multichoice Universal Tub / Shower Rough	119
87380-GL	Brizo	5" Linear Square Single Function Wall Mount Showerhead - Luxe Gold	120
RP74448GL	Brizo	7" Linear Square Wall Mount Shower Arm And Flange - Luxe Gold	N/A
K-9136-BV	Kohler	Clearflo Square Design Tile In Shower Drain - Vibrant Brushed Bronze	121
K-78080-0	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	124

K-21710-L-BV

Kohler

Reach Left Hand Trip Lever - Vibrant Brushed Bronze

127



BRIZO®

BATHROOM FAUCET

- Allaria™ Collection
- Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Single hole mount
- Solid brass body
- Control mechanism - 22 mm ceramic disc 90° progressive cartridge with metal stem
- Spout features laminar flow aerator
- Must order drain separately
- 1/2"-14 NPSM threaded inlets


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- EPA WaterSense®
- ICC/ANSI A117.1 - Valve control only

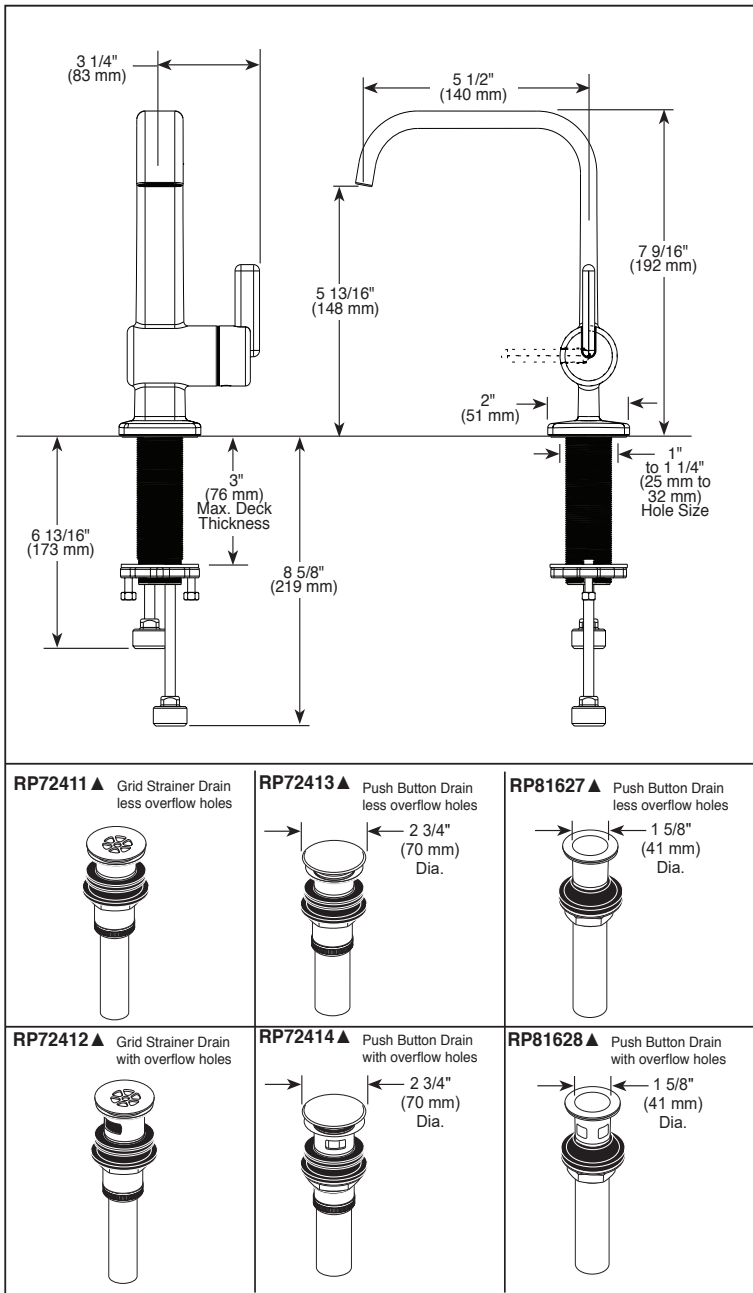


▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-65067LF-ECO Rev. B

Brizo Kitchen & Bath Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2024 Brizo Kitchen & Bath Company



BRIZO®

PUSH BUTTON BATHROOM DRAIN ASSEMBLY

- Push Button Drain
- For Use with Bathroom Sinks with Built-In Overflow Drain Holes

STANDARD SPECIFICATIONS:


- Push button drain
- For use with bathroom sinks with built-in overflow drain holes
- Fits sinks with standard 1 5/8" drain hole size

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.2 / CSA B125.2

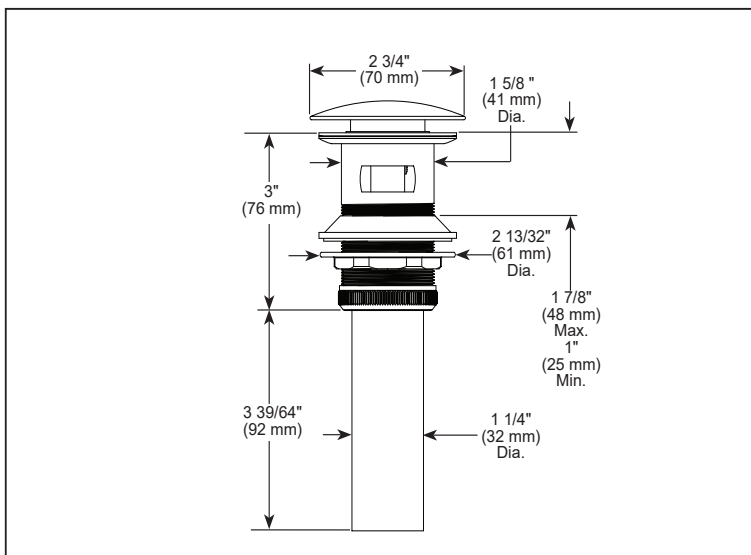

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-RP72414 Rev. D

Brizo Kitchen & Bath Company
55 E. 111th Street, Carmel, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2024 Brizo Kitchen & Bath Company

KOHLER®

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Features

- Rectangular basin
- Overflow drain
- No faucet holes; requires wall- or counter-mount faucet



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| 96 | Biscuit |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

CSA B651

Technical Information

With Overflow:	Yes
Drain Hole Diameter:	1-3/4" (44 mm)
Basin Configuration:	Single Bowl
Basin Length:	17-5/8" (448 mm)
Basin Width:	13-1/8" (334 mm)
Basin Depth:	5-5/16" (135 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment

K-23725 Cast iron cleaner

Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.



5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER**


KOHLER

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

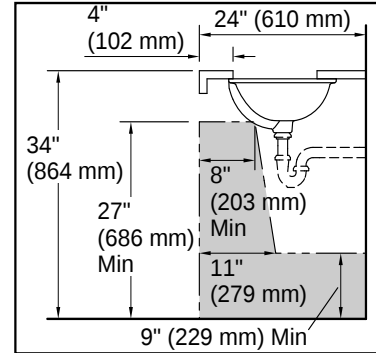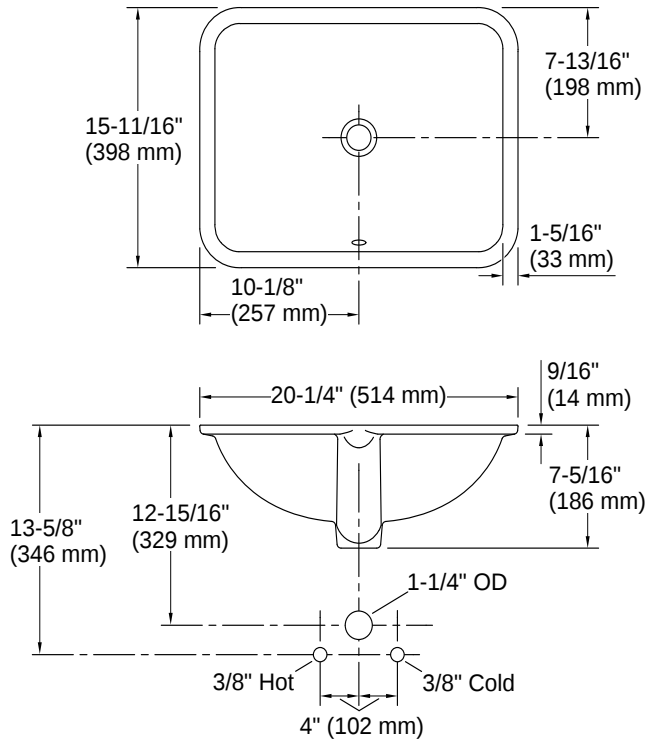

Recommended ADA Installation



Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER**



BRIZO®

PRESSURE BALANCE VALVE TRIM

- Kintsu® & Allaria® Bath Collections
- Valve Trim Only

STANDARD SPECIFICATIONS:






- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R60000 Series)
- Max flow rate 6.3 gpm at 60 psi with R60000-UNBXHF
- Back-to-back installation capability
- Handle controls on/off and temperature
- Red/Blue temperature indicator markings
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- Adjusts for up to 1" wall thickness. Optional extension kit (RP101595) extends rough installation up to 1 3/4"

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- ICC/ANSI A117.1

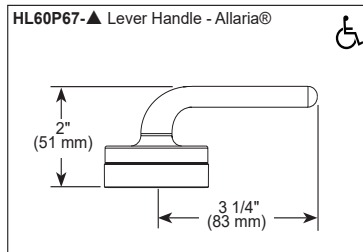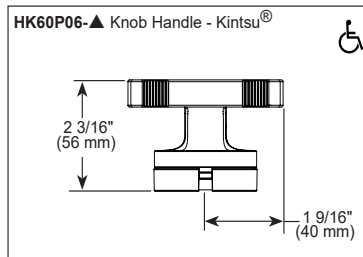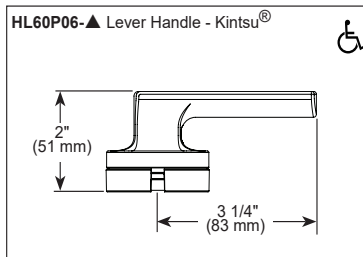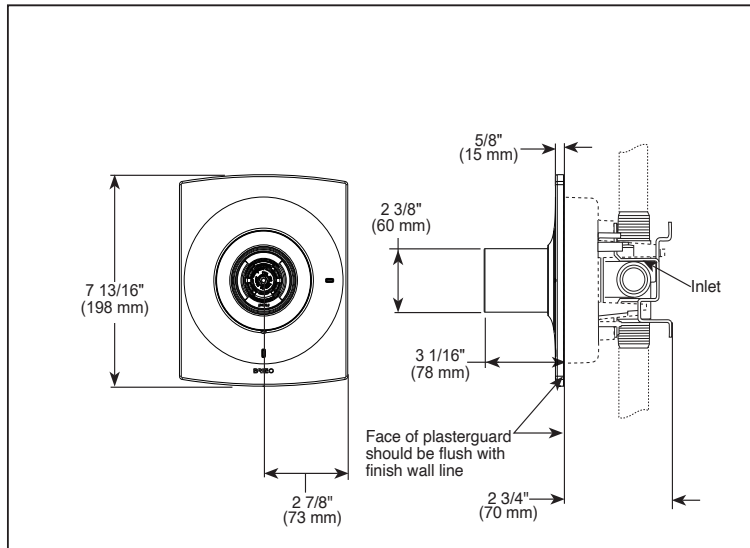


▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T60P006-LHP Rev. C

Brizo Kitchen & Bath Faucet Company


55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

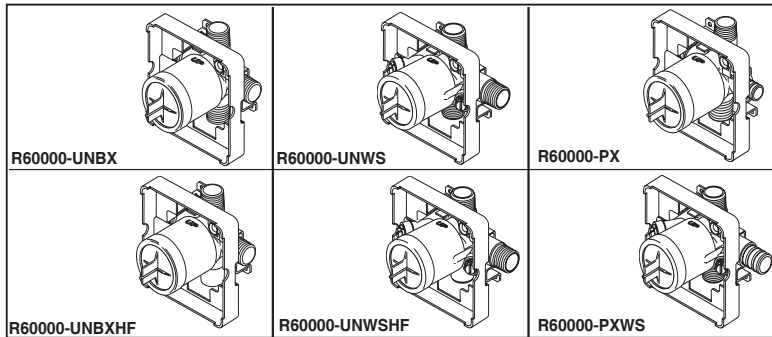

BRIZO®

MULTICHOICE® UNIVERSAL ROUGH VALVE BODY

- R60000-UNBX (Universal Single Box Model)
- R60000-UNBXHF (High Flow Shower Only)
- R60000-UNWS (Universal with Stops)
- R60000-UNWSHF (High Flow with Stops Shower Only)
- R60000-PX (Pex Crimp Inlets with UN Outlets)
- R60000-PXWS (Pex Crimp Inlets with Stops And UN Outlets)

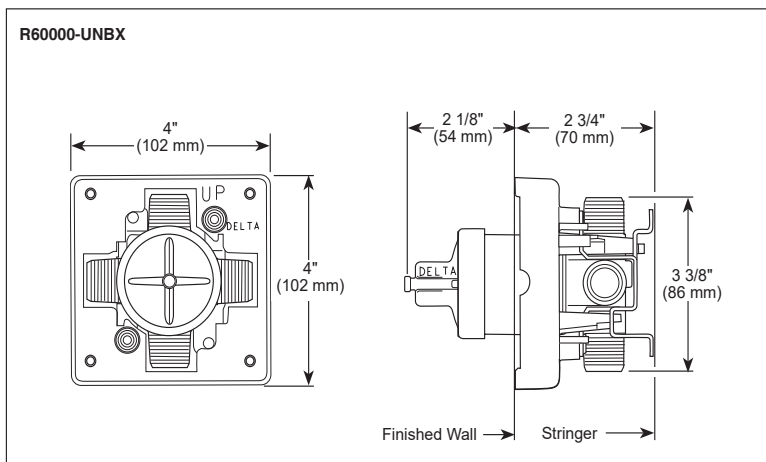

STANDARD SPECIFICATIONS:


- Forged brass body.
- Back-to-Back installation capabilities.
- Can be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap.
- Square plasterguard allows for right angle cuts.
- Thin wall mounting.
- For use with MultiChoice® Universal single or dual function trim.
- Cartridge ships with trim.
- 1/2" outlets and connections.

Note: No tub outlet in HF model.

Note: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting).

Note: Should use proper tooling with crimping pex fitting.

Note: UN indicates Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat.

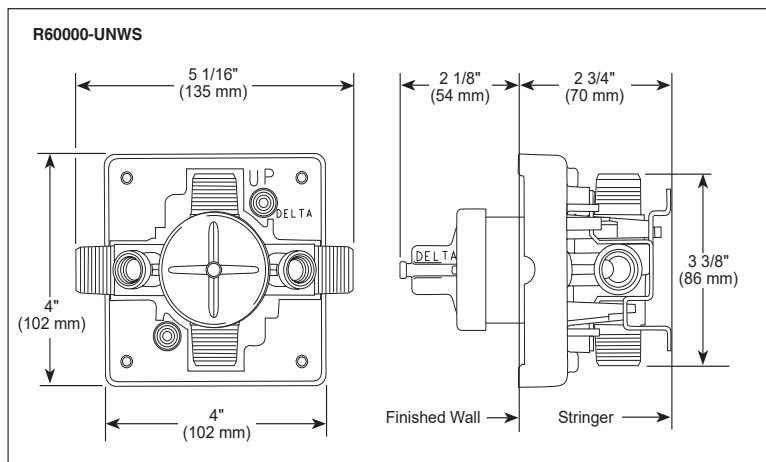

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Extension kits available



Visit our website at www.brizo.com for specification sheet for trim model to identify appropriate RP.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R60000 Rev. G

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

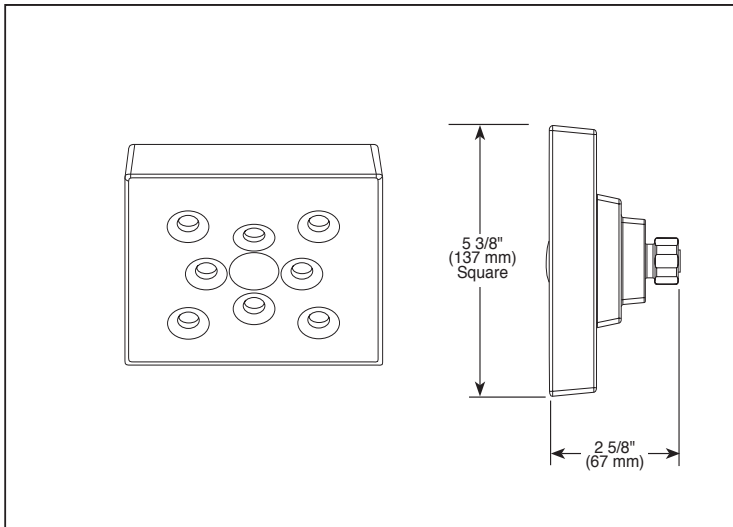

▲ Designate proper finish suffix

BRIZO®

SHOWER HEAD

■ Siderna® Bath Collection

FEATURES:

- H₂Okinetic® Technology

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Finished sprayface matches shell finish
- Shower head has 1/2"-14 NPSM female connection
- Wrench flats for tightening
- Shower head ball nut pivots and rotates

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorize representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-87380 Rev. E

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

KOHLER®

Clearflo | K-9136

Square design tile-in shower drain

Features

- Removable grid plate
- Reversible collar accommodates a variety of tile thicknesses
- 2" and 3" PVC connection



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Clearflo | K-9136

Square design tile-in shower drain

Codes/Standards

ASME A112.18.2/CSA B125.2

Material

- Brass and PVC construction
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.


5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Clearflo | K-9136

Square design tile-in shower drain

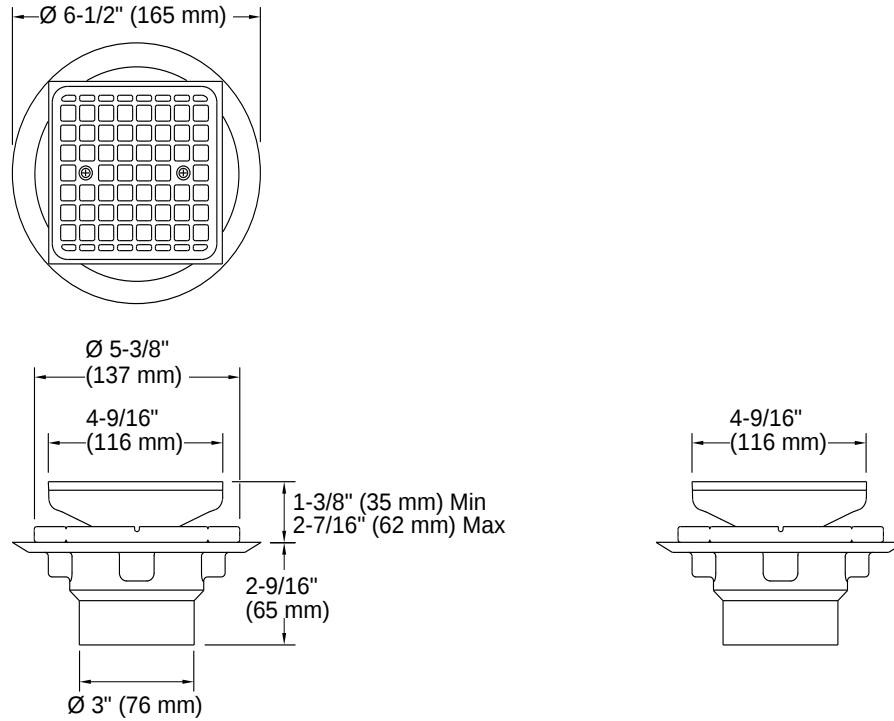

Installation

- Through-the-floor tile-in installation

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) glazed trapway
- Includes Impro® ReadyLatch® Quiet-Close™ toilet seat
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|----|-------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | NY | Dune |
|  | 95 | Ice Grey |
|  | 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ADA CSA B651 OBC

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Recommended Products/Accessories

1023457 Toilet Wax Ring And Hardware Kit
K-21710-L Left-hand trip lever
K-23726 Drain treatment
K-4108 Elongated bidet toilet seat with remote control
K-30780 Quiet-Close™ elongated toilet seat
K-5381 14" rough-in full skirt trap and attachment system
K-5383 10" rough-in full skirt trap and attachment system

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)
Bowl Shape:	Elongated
Waste Outlet:	Floor
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted
Water Surface Size:	9-1/8" x 8-1/2" (232 mm x 216 mm)
Rim to Water Surface:	6-3/8" (162 mm)

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure:	25 psi (172.4 kPa)
Minimum Flow Rate:	0.43 gpm (1.6 l/min)



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

One-piece compact elongated toilet with skirted trapway, 1.28 gpf



KOHLER®

Reach® | K-21710-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-78080 Reach™ toilet



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|-----|-------------------------------|
|  | CP | Polished Chrome |
|  | SN | Vibrant Polished Nickel |
|  | AF | Vibrant French Gold |
|  | BN | Vibrant Brushed Nickel |
|  | BV | Vibrant Brushed Bronze |
|  | BL | Matte Black |
|  | 2MB | Vibrant Brushed Moderne Brass |
|  | TT | Vibrant Titanium |
|  | BGP | Vibrant Brushed Graphite |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Reach® | K-21710-L

Left-hand trip lever

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.


5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Reach® | K-21710-L

Left-hand trip lever

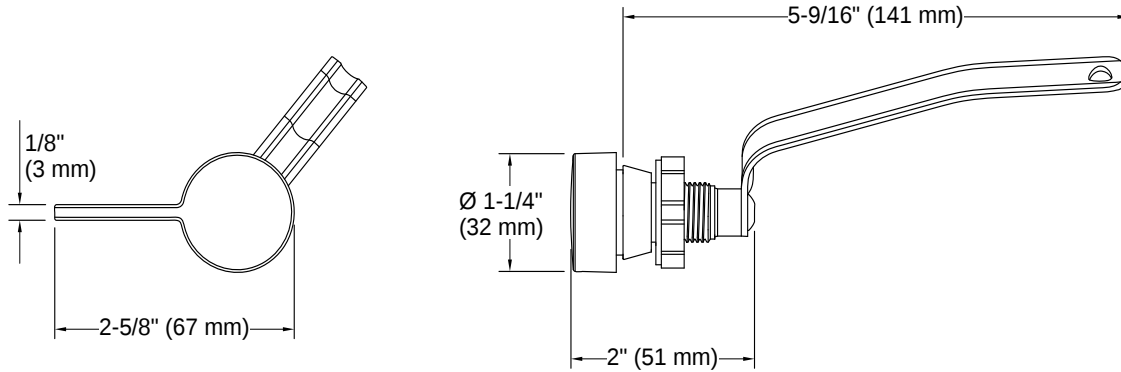

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER**

BATH 3 (FULL TILED SHOWER)


VENDOR PART	VENDOR	DESCRIPTION	PAGE
65067LF-GLCL-ECO	Brizo	Allaria 1 Hole Deck Mount Lavatory 1.2 Gpm Side Handle - Luxe Gold / Clear Acrylic	132
RP72414GL	Brizo	Push Button Pop Up With Overflow - Luxe Gold	133
K-20000-0	Kohler	Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White	134
T60P006-GLLHP	Brizo	Kintsu Pressure Balance Valve Only Trim Less Handle - Luxe Gold	137
HL60P67-GL	Brizo	Allaria Pressure Balance Trim Handle Kit Twist Lever - Luxe Gold	N/A
R60000-UNBX	Brizo	Multichoice Universal Tub / Shower Rough	138
87380-GL	Brizo	5" Linear Square Single Function Wall Mount Showerhead - Luxe Gold	139
RP74448GL	Brizo	7" Linear Square Wall Mount Shower Arm And Flange - Luxe Gold	N/A
K-9136-BV	Kohler	Clearflo Square Design Tile In Shower Drain - Vibrant Brushed Bronze	140
K-78080-0	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	143

K-21710-L-BV

Kohler

Reach Left Hand Trip Lever - Vibrant Brushed Bronze

146



BRIZO®

BATHROOM FAUCET

- Allaria™ Collection
- Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Single hole mount
- Solid brass body
- Control mechanism - 22 mm ceramic disc 90° progressive cartridge with metal stem
- Spout features laminar flow aerator
- Must order drain separately
- 1/2"-14 NPSM threaded inlets


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- EPA WaterSense®
- ICC/ANSI A117.1 - Valve control only

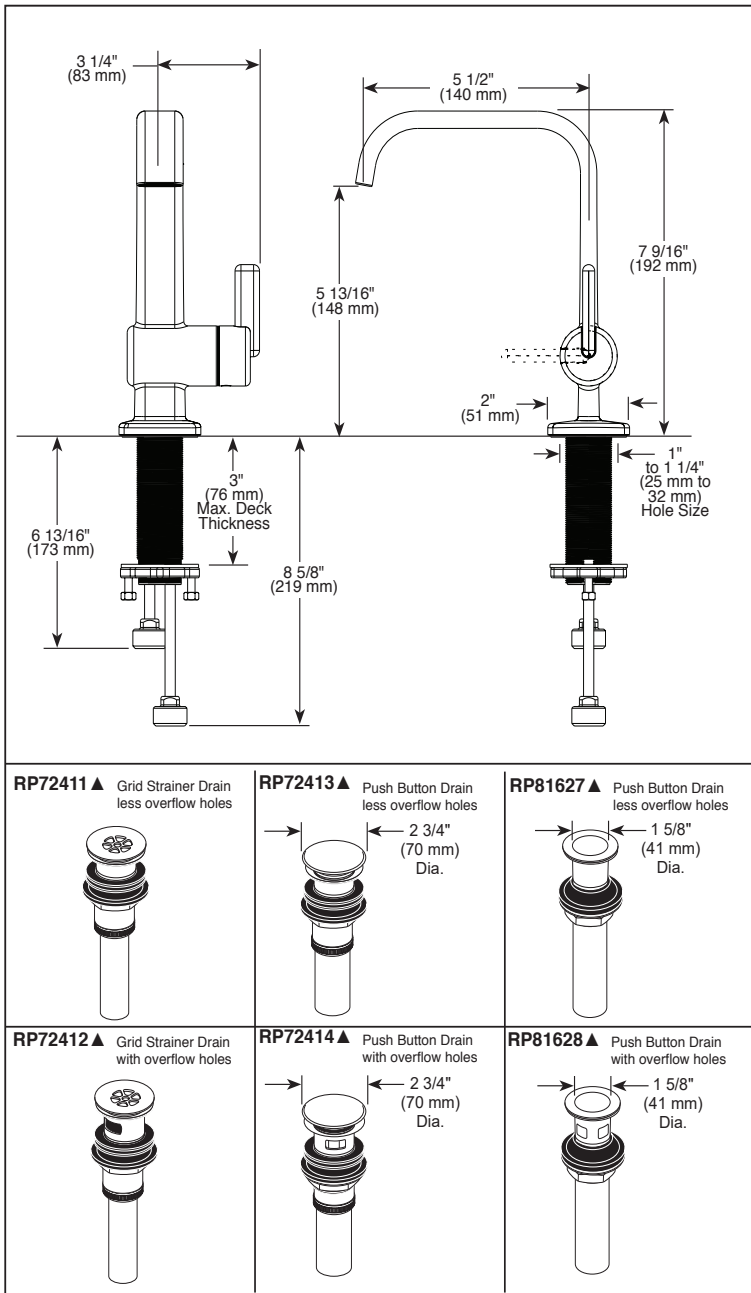


▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-65067LF-ECO Rev. B

Brizo Kitchen & Bath Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2024 Brizo Kitchen & Bath Company



BRIZO®

PUSH BUTTON BATHROOM DRAIN ASSEMBLY

- Push Button Drain
- For Use with Bathroom Sinks with Built-In Overflow Drain Holes

STANDARD SPECIFICATIONS:


- Push button drain
- For use with bathroom sinks with built-in overflow drain holes
- Fits sinks with standard 1 5/8" drain hole size

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.2 / CSA B125.2

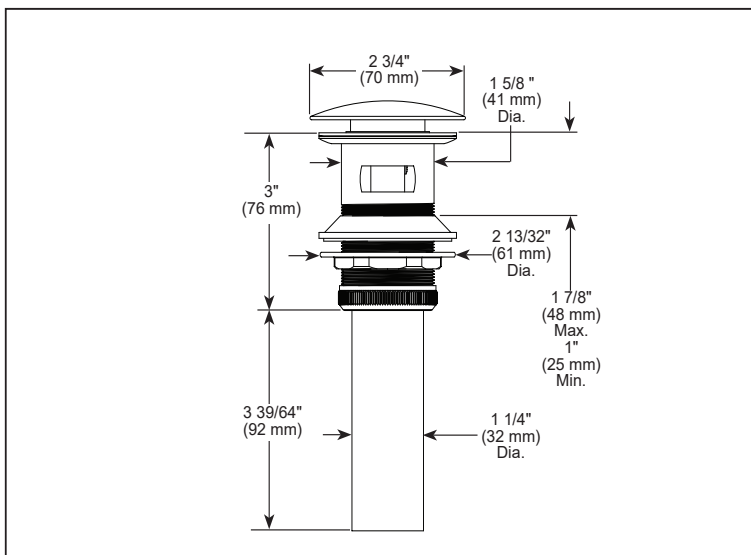

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-RP72414 Rev. D

Brizo Kitchen & Bath Company
55 E. 111th Street, Carmel, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2024 Brizo Kitchen & Bath Company

KOHLER®

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Features

- Rectangular basin
- Overflow drain
- No faucet holes; requires wall- or counter-mount faucet



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| 96 | Biscuit |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

CSA B651

Technical Information

With Overflow:	Yes
Drain Hole Diameter:	1-3/4" (44 mm)
Basin Configuration:	Single Bowl
Basin Length:	17-5/8" (448 mm)
Basin Width:	13-1/8" (334 mm)
Basin Depth:	5-5/16" (135 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment

K-23725 Cast iron cleaner

Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.



5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER**


KOHLER

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

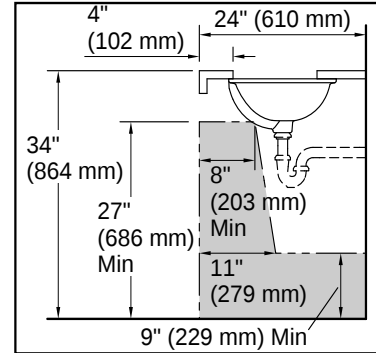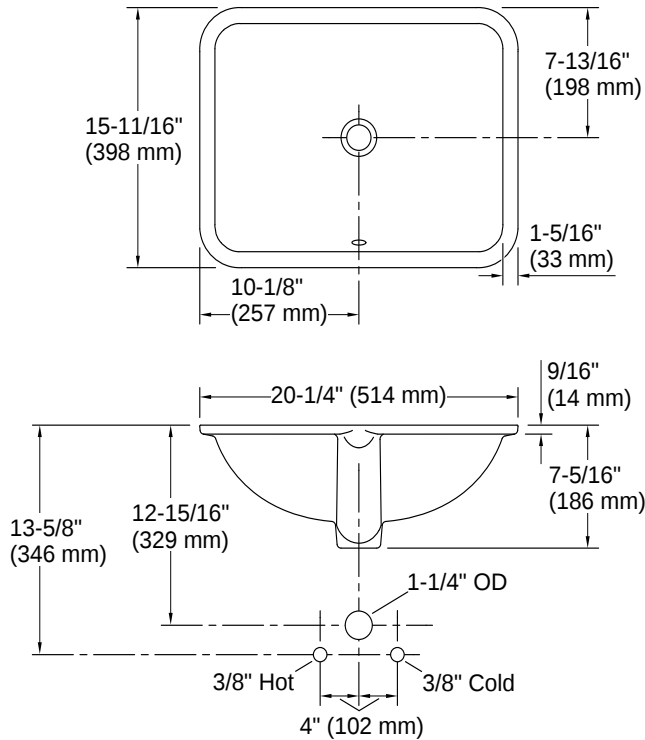

Recommended ADA Installation



Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER**



BRIZO®

PRESSURE BALANCE VALVE TRIM

- Kintsu® & Allaria® Bath Collections
- Valve Trim Only

STANDARD SPECIFICATIONS:





- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R60000 Series)
- Max flow rate 6.3 gpm at 60 psi with R60000-UNBXHF
- Back-to-back installation capability
- Handle controls on/off and temperature
- Red/Blue temperature indicator markings
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- Adjusts for up to 1" wall thickness. Optional extension kit (RP101595) extends rough installation up to 1 3/4"

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- ICC/ANSI A117.1

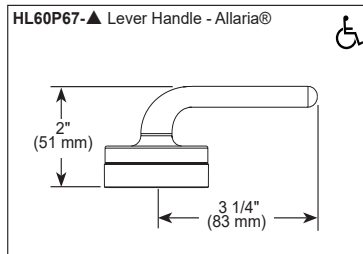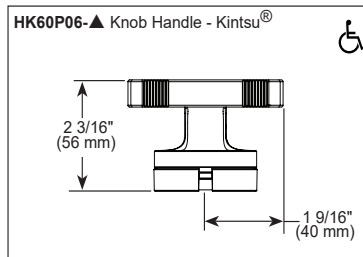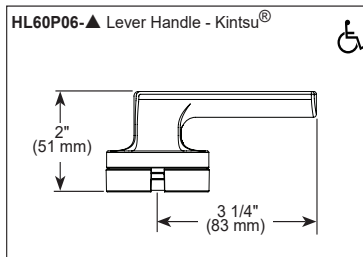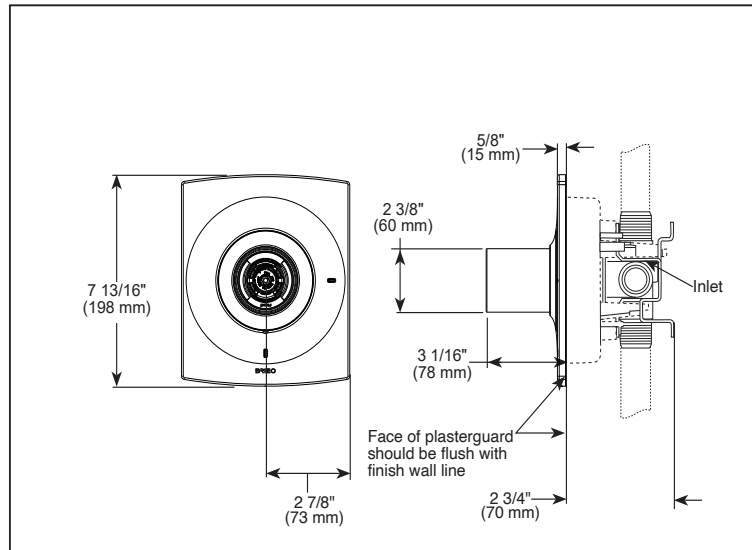


▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T60P006-LHP Rev. C

Brizo Kitchen & Bath Faucet Company


55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

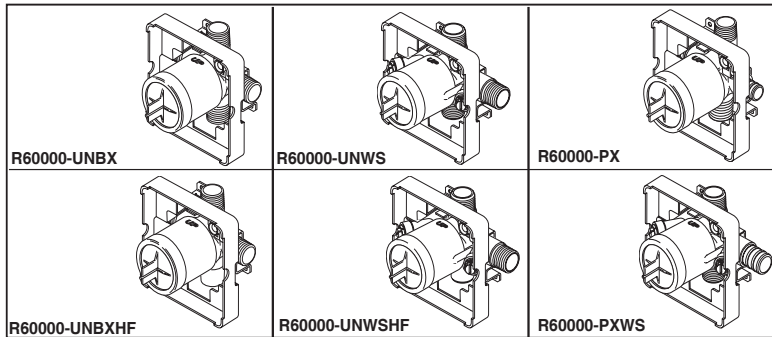

BRIZO®

**MULTICHOICE®
UNIVERSAL ROUGH
VALVE BODY**

- R60000-UNBX (Universal Single Box Model)
- R60000-UNBXHF (High Flow Shower Only)
- R60000-UNWS (Universal with Stops)
- R60000-UNWSHF (High Flow with Stops Shower Only)
- R60000-PX (Pex Crimp Inlets with UN Outlets)
- R60000-PXWS (Pex Crimp Inlets with Stops And UN Outlets)

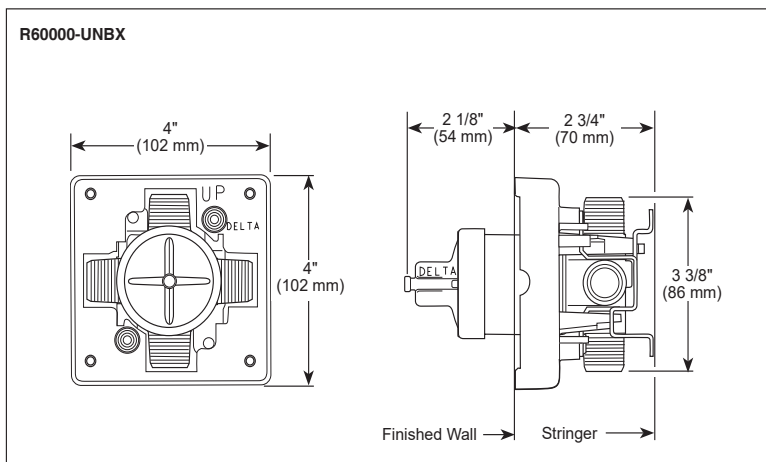

STANDARD SPECIFICATIONS:


- Forged brass body.
- Back-to-Back installation capabilities.
- Can be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap.
- Square plasterguard allows for right angle cuts.
- Thin wall mounting.
- For use with MultiChoice® Universal single or dual function trim.
- Cartridge ships with trim.
- 1/2" outlets and connections.

Note: No tub outlet in HF model.

Note: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting).

Note: Should use proper tooling with crimping pex fitting.

Note: UN indicates Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat.

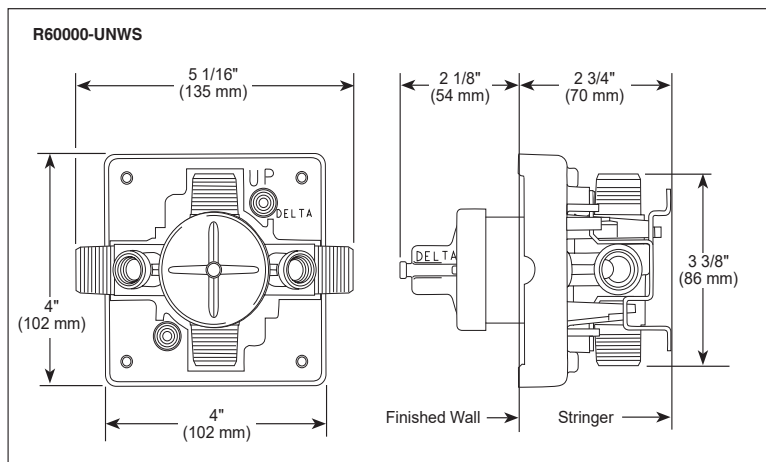

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Extension kits available



Visit our website at www.brizo.com for specification sheet for trim model to identify appropriate RP.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R60000 Rev. G

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

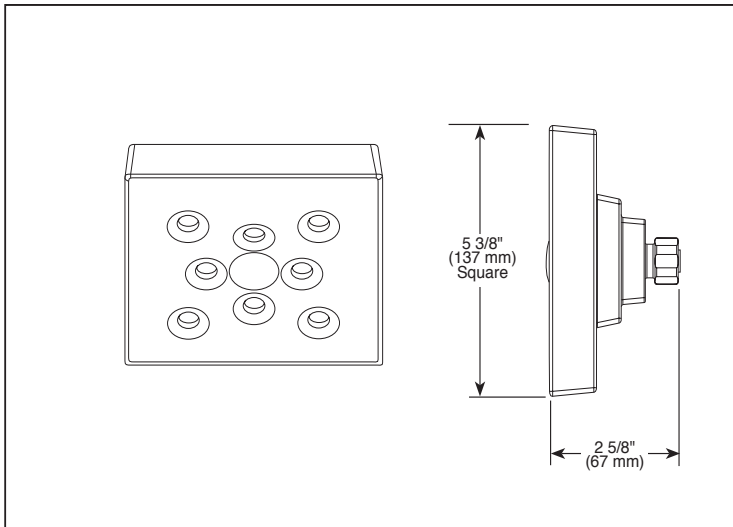

▲ Designate proper finish suffix

BRIZO®

SHOWER HEAD

■ Siderna® Bath Collection

FEATURES:

- H₂Okinetic® Technology

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Finished sprayface matches shell finish
- Shower head has 1/2"-14 NPSM female connection
- Wrench flats for tightening
- Shower head ball nut pivots and rotates

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorize representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-87380 Rev. E

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

KOHLER®

Clearflo | K-9136

Square design tile-in shower drain

Features

- Removable grid plate
- Reversible collar accommodates a variety of tile thicknesses
- 2" and 3" PVC connection



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER**®

KOHLER

Clearflo | K-9136

Square design tile-in shower drain

Codes/Standards

ASME A112.18.2/CSA B125.2

Material

- Brass and PVC construction
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.


5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Clearflo | K-9136

Square design tile-in shower drain

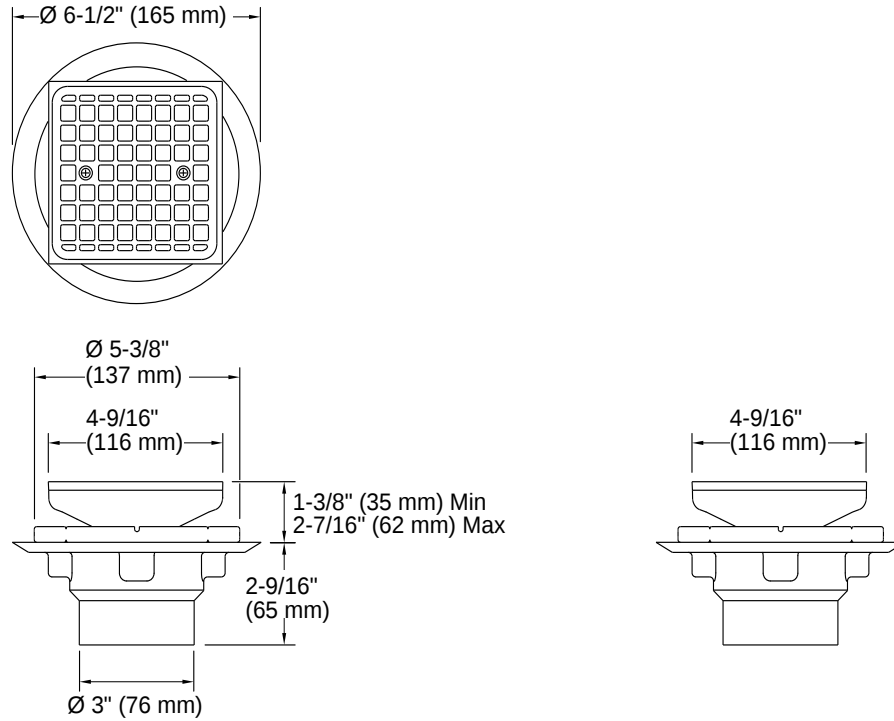

Installation

- Through-the-floor tile-in installation

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) glazed trapway
- Includes Impro® ReadyLatch® Quiet-Close™ toilet seat
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| 96 | Biscuit |
| NY | Dune |
| 95 | Ice Grey |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ADA CSA B651 OBC

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Recommended Products/Accessories

1023457 Toilet Wax Ring And Hardware Kit
K-21710-L Left-hand trip lever
K-23726 Drain treatment
K-4108 Elongated bidet toilet seat with remote control
K-30780 Quiet-Close™ elongated toilet seat
K-5381 14" rough-in full skirt trap and attachment system
K-5383 10" rough-in full skirt trap and attachment system

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)
Bowl Shape:	Elongated
Waste Outlet:	Floor
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted
Water Surface Size:	9-1/8" x 8-1/2" (232 mm x 216 mm)
Rim to Water Surface:	6-3/8" (162 mm)

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure:	25 psi (172.4 kPa)
Minimum Flow Rate:	0.43 gpm (1.6 l/min)




1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

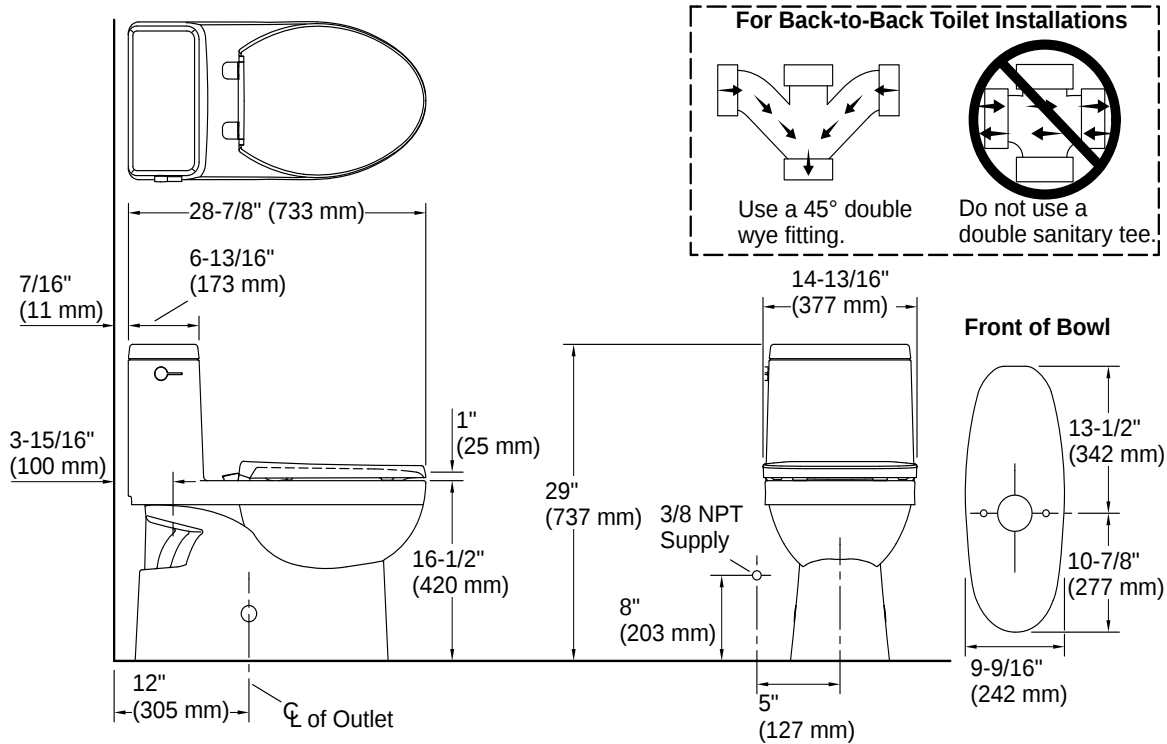

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Supply line sold separately

Installation Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

Reach® | K-21710-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-78080 Reach™ toilet



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|-----|-------------------------------|
|  | CP | Polished Chrome |
|  | SN | Vibrant Polished Nickel |
|  | AF | Vibrant French Gold |
|  | BN | Vibrant Brushed Nickel |
|  | BV | Vibrant Brushed Bronze |
|  | BL | Matte Black |
|  | 2MB | Vibrant Brushed Moderne Brass |
|  | TT | Vibrant Titanium |
|  | BGP | Vibrant Brushed Graphite |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Reach® | K-21710-L

Left-hand trip lever

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.


5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Reach® | K-21710-L

Left-hand trip lever

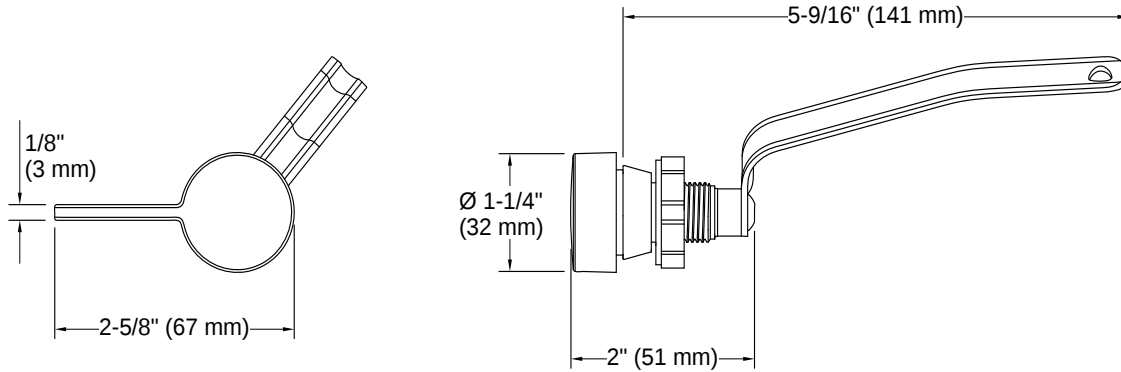

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:19 - US-CA




THE BOLD LOOK
OF **KOHLER**

BASEMENT (FULL TILED SHOWER)

VENDOR PART	VENDOR	DESCRIPTION	PAGE
65368LF-BNXLHP-ECO	Brizo	Allaria Widespread Lavatory Faucet With Square Spout Less Handles - Brilliance Black Onyx	151
HL5368-BNXBL	Brizo	Allaria Widespread Handle Kit Lever Handle - Brilliance Black Onyx / Matte Black	N/A
RP72414BNX	Brizo	Push Button Pop Up With Overflow - Brilliance Black Onyx	153
K-20000-O	Kohler	Caxton 20 1/2" Rectangular Undermount Bathroom Sink - White	154
T60P006-BNXLHP	Brizo	Kintsu Pressure Balance Valve Only Trim Less Handle - Brilliance Black Onyx	157
HL60P67-BNX	Brizo	Allaria Pressure Balance Trim Handle Kit Twist Lever - Brilliance Black Onyx	N/A
R60000-UNBX	Brizo	Multichoice Universal Tub / Shower Rough	158
87380-BL	Brizo	5" Linear Square Single Function Wall Mount Showerhead - Matte Black	159
RP74448BL	Brizo	7" Linear Square Wall Mount Shower Arm And Flange - Matte Black	160
K-9136-BL	Kohler	Clearflo Square Design Tile Pvc In Shower Drain- Matte Black	161

BASEMENT (FULL TILED SHOWER)

K-78080-0	Kohler	Reach One Piece Compact Elongated Toilet With Skirted Trapway, 1.28 Gpf - White	164
K-21710-L-BL	Kohler	Reach Left Hand Trip Lever - Matte Black	167

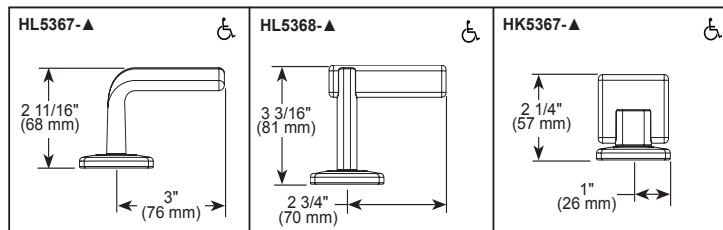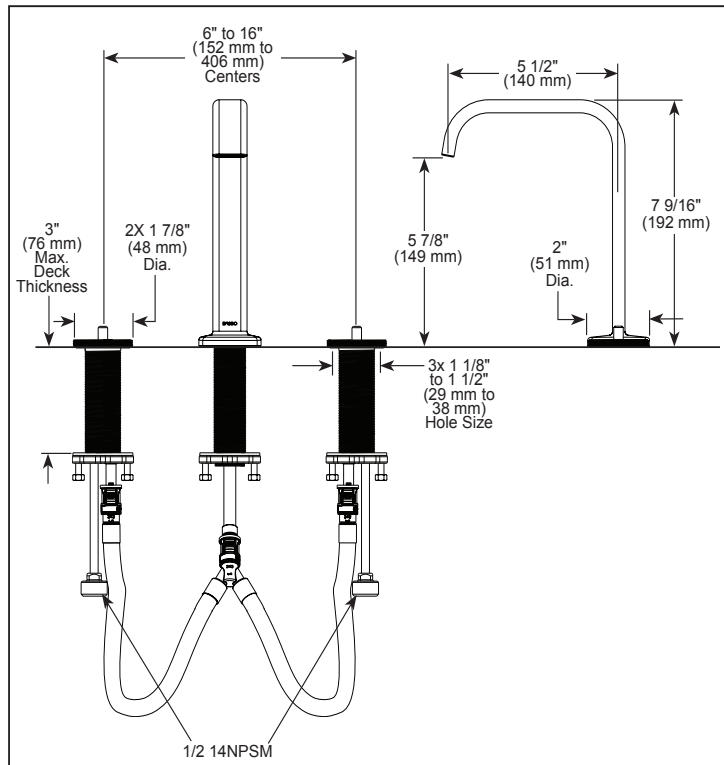

▲ Designate Proper Finish Suffix

BRIZO®

BATHROOM FAUCET

- Allaria® Collection
- Two Handle Widespread Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three hole mount
- Control mechanism is a rotating cylinder ceramic cartridge with 90° rotation
- 1/2-14 NPSM threaded inlets
- Solid brass fabricated end valve and spout bodies
- Spout features laminar water flow
- LHP - Less Handle Program. See handle options below
- Drain sold separately

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®
- ICC/ANSI A117.1- Valve control only

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company



BRIZO^{MD}

ROBINET POUR SALLE DE BAIN

- Collection Allaria^{MD}
- Deux poignées à grand écartement, installé sur plan

SPÉCIFICATIONS STANDARDS :

- Débit maximal 1,2 gpm à 60 psi, 4,5 L/min à 414 kPa
- Montage à trois trous
- Le mécanisme de contrôle est une cartouche en céramique à cylindre rotatif avec une rotation de 90°
- Entrées filetées 1/2 po (13 mm) -14 NPSM
- Soupapes d'extrémité et corps du bec en laiton massif.
- Le bec offre un écoulement d'eau laminaire
- LHP - Programme sans poignée. Voir les options de poignées ci-dessous.
- Drain vendu séparément



GARANTIE

- Pièces et finition – Garantie à vie limitée; ou pour les clients commerciaux, 10 ans pour les résidences multifamiliales (appartements et condominiums) et 5 ans pour tout autre usage commercial, dans tous les cas à compter de la date de réception du produit par l'acheteur initial ou son représentant autorisé (installateur, etc.).
- Veuillez consulter fr.brizofaucet.ca pour tous les détails de notre garantie limitée.



CONFORME À :

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense^{MD}
- ICC/ANSI A117.1- Contrôle de soupape uniquement

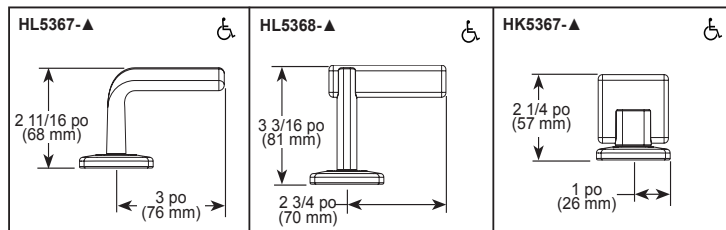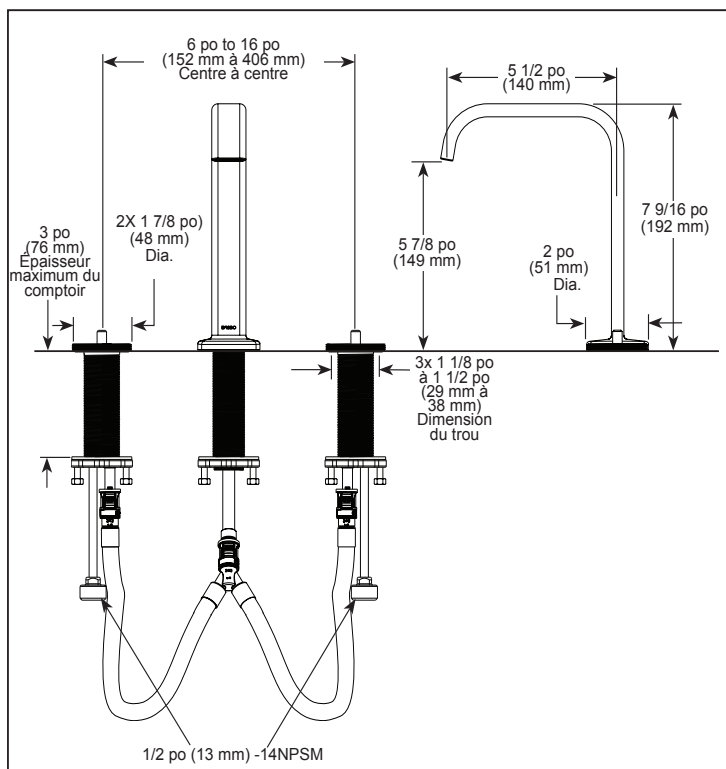


▲ Désigne le suffixe approprié de la finition

Brizo Kitchen & Bath Company se réserve le droit (1) d'effectuer des changements dans les spécifications et les matériaux, et (2) de modifier ou d'abandonner certains modèles, dans les deux cas sans préavis ni obligation. Les dimensions sont à titre indicatif seulement. Consultez le Livre des prix courants de la gamme complète ou fr.brizofaucet.ca pour la disponibilité des produits et des options.

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Faucet Company



BRIZO®

PUSH BUTTON BATHROOM DRAIN ASSEMBLY

- Push Button Drain
- For Use with Bathroom Sinks with Built-In Overflow Drain Holes

STANDARD SPECIFICATIONS:


- Push button drain
- For use with bathroom sinks with built-in overflow drain holes
- Fits sinks with standard 1 5/8" drain hole size

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.2 / CSA B125.2

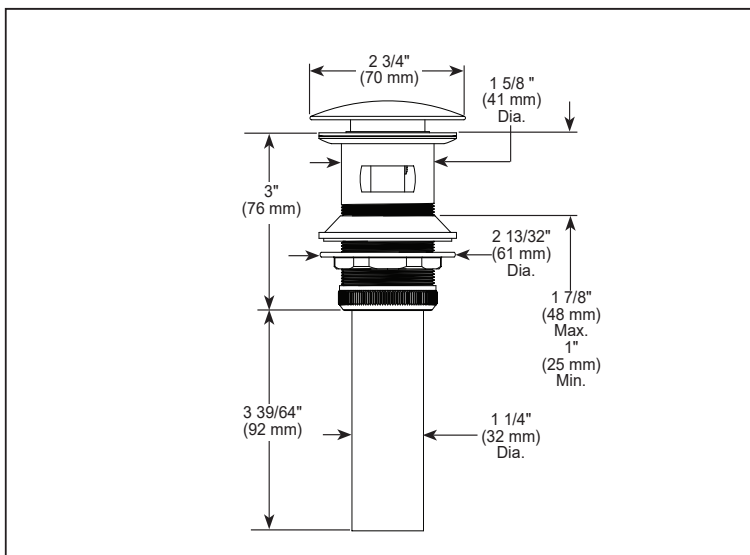

▲ Designate Proper Finish Suffix

KOHLER®

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Features

- Rectangular basin
- Overflow drain
- No faucet holes; requires wall- or counter-mount faucet



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| 96 | Biscuit |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

CSA B651

Technical Information

With Overflow:	Yes
Drain Hole Diameter:	1-3/4" (44 mm)
Basin Configuration:	Single Bowl
Basin Length:	17-5/8" (448 mm)
Basin Width:	13-1/8" (334 mm)
Basin Depth:	5-5/16" (135 mm)

Material

- Vitreous china

Recommended Products/Accessories

K-23726 Drain treatment

K-23725 Cast iron cleaner

Warranty

See website for detailed warranty information.

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.



5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER**


KOHLER

Caxton® | K-20000

20-1/2" rectangular undermount bathroom sink

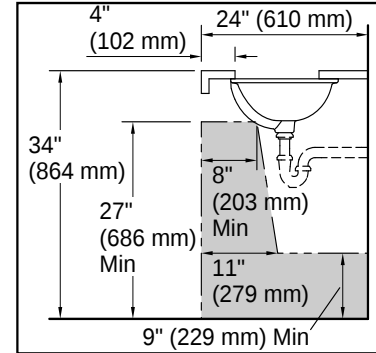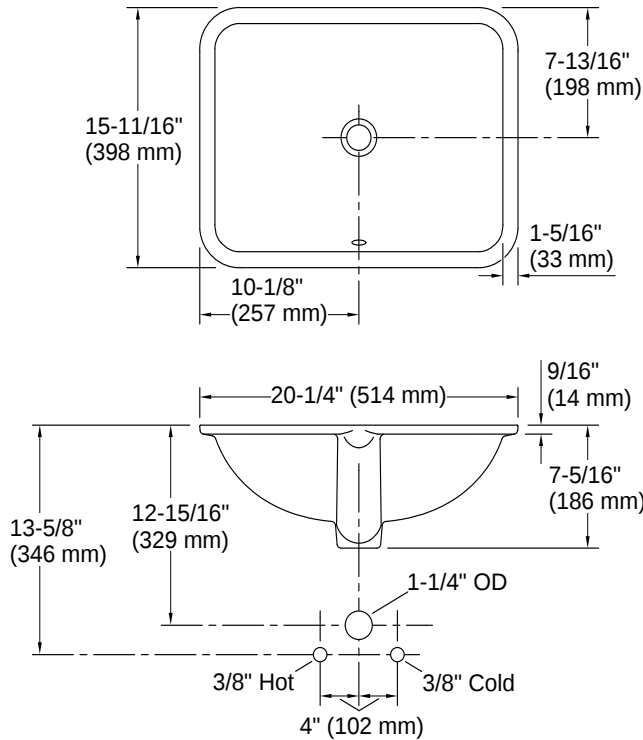

Recommended ADA Installation



Installation

- Undermount

Installation Notes

Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:12 - US-CA

THE BOLD LOOK
OF **KOHLER**



BRIZO®

PRESSURE BALANCE VALVE TRIM

- Kintsu® & Allaria® Bath Collections
- Valve Trim Only

STANDARD SPECIFICATIONS:





- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R60000 Series)
- Max flow rate 6.3 gpm at 60 psi with R60000-UNBXHF
- Back-to-back installation capability
- Handle controls on/off and temperature
- Red/Blue temperature indicator markings
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- Adjusts for up to 1" wall thickness. Optional extension kit (RP101595) extends rough installation up to 1 3/4"

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- ICC/ANSI A117.1

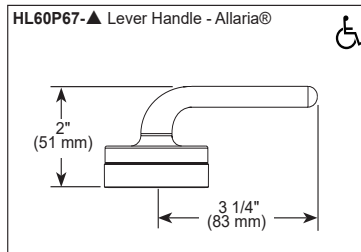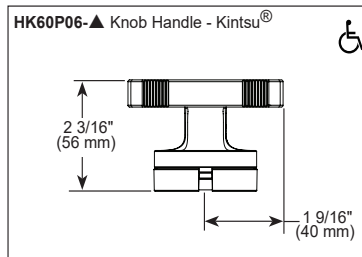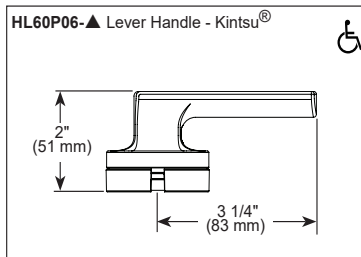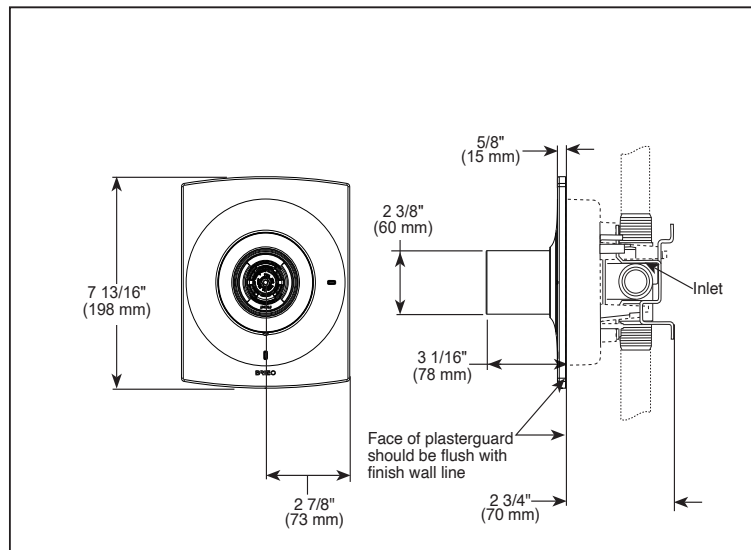


▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T60P006-LHP Rev. C

Brizo Kitchen & Bath Faucet Company


55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

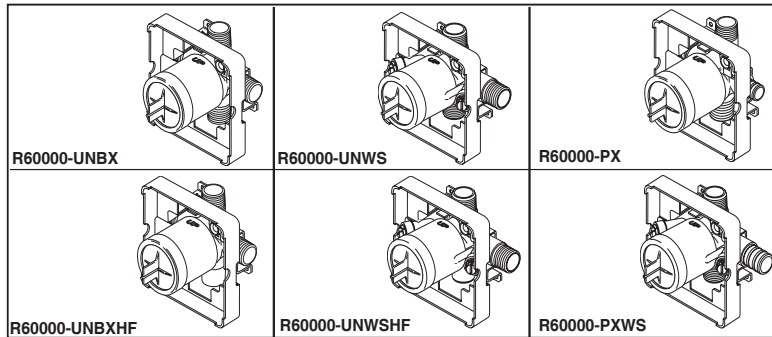

BRIZO®

**MULTICHOICE®
UNIVERSAL ROUGH
VALVE BODY**

- R60000-UNBX (Universal Single Box Model)
- R60000-UNBXHF (High Flow Shower Only)
- R60000-UNWS (Universal with Stops)
- R60000-UNWSHF (High Flow with Stops Shower Only)
- R60000-PX (Pex Crimp Inlets with UN Outlets)
- R60000-PXWS (Pex Crimp Inlets with Stops And UN Outlets)

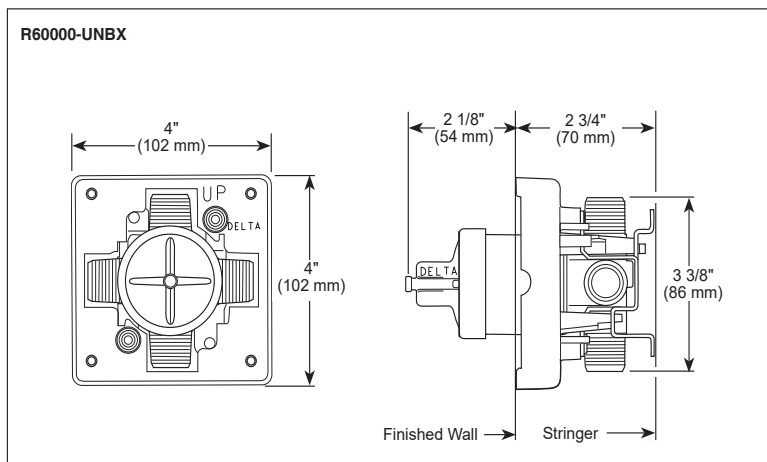

STANDARD SPECIFICATIONS:


- Forged brass body.
- Back-to-Back installation capabilities.
- Can be tested with air (200 PSI) or water (300 PSI) without valve using supplied test cap.
- Square plasterguard allows for right angle cuts.
- Thin wall mounting.
- For use with MultiChoice® Universal single or dual function trim.
- Cartridge ships with trim.
- 1/2" outlets and connections.

Note: No tub outlet in HF model.

Note: Should use proper fitting with each type (copper tubing, iron pipe, and pex fitting).

Note: Should use proper tooling with crimping pex fitting.

Note: UN indicates Universal type fitting and is 1/2" NPT male thread with 1/2" C.W.T. female sweat.

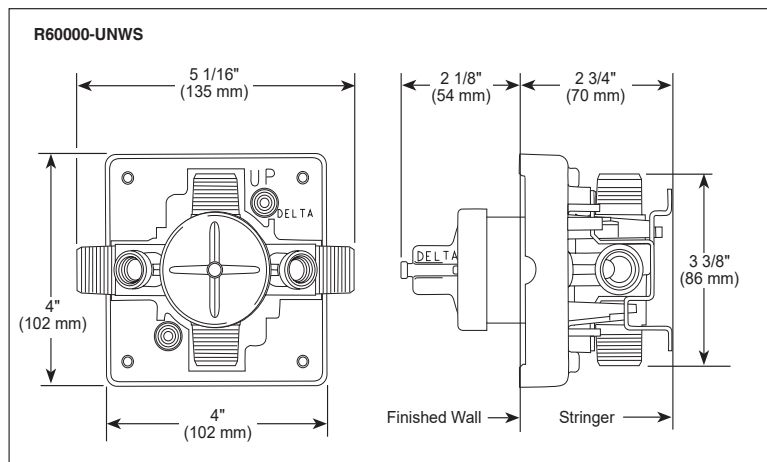

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Extension kits available



Visit our website at www.brizo.com for specification sheet for trim model to identify appropriate RP.

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-R60000 Rev. G

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

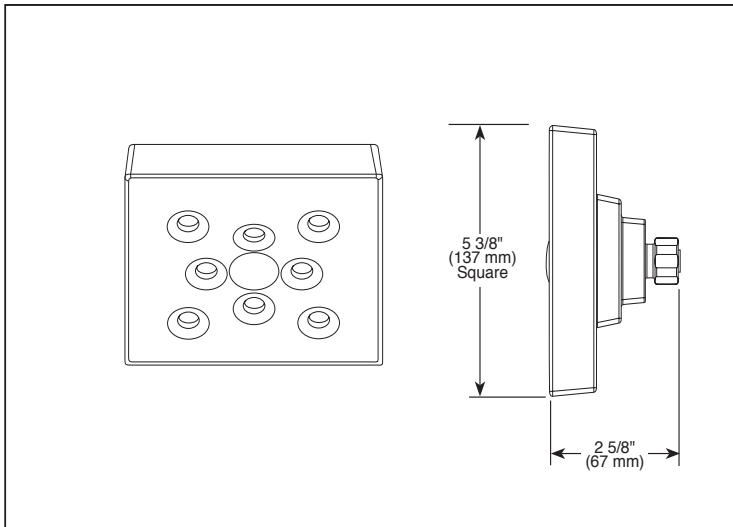

▲ Designate proper finish suffix

BRIZO®

SHOWER HEAD

■ Siderna® Bath Collection

FEATURES:

- H₂Okinetic® Technology

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Finished sprayface matches shell finish
- Shower head has 1/2"-14 NPSM female connection
- Wrench flats for tightening
- Shower head ball nut pivots and rotates

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorize representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:



- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-87380 Rev. E

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

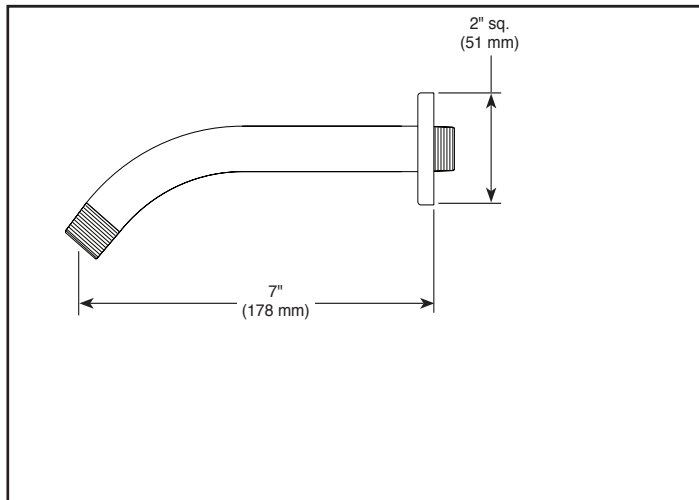

▲ Designate proper finish suffix

BRIZO®

SHOWER ARM AND FLANGE

■ Siderna® Bath Collection

STANDARD SPECIFICATIONS:

- Solid brass construction
- 1/2" NPT threads

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-RP74448 Rev. B

Brizo Kitchen & Bath Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Brizo Kitchen & Bath Faucet Company

KOHLER®

Clearflo | K-9136

Square design tile-in shower drain

Features

- Removable grid plate
- Reversible collar accommodates a variety of tile thicknesses
- 2" and 3" PVC connection



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Clearflo | K-9136

Square design tile-in shower drain

Codes/Standards

ASME A112.18.2/CSA B125.2

Material

- Brass and PVC construction
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.



5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Clearflo | K-9136

Square design tile-in shower drain

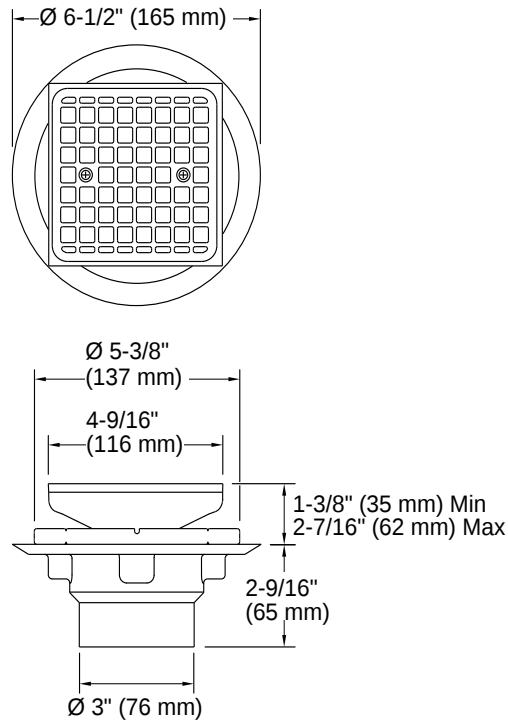

Installation

- Through-the-floor tile-in installation

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 22:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER®

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) glazed trapway
- Includes Impro® ReadyLatch® Quiet-Close™ toilet seat
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| 96 | Biscuit |
| NY | Dune |
| 95 | Ice Grey |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Accessibility standards may require controls to be located on the open side of the toilet.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ADA CSA B651 OBC

ASME A112.19.2/CSA B45.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

Recommended Products/Accessories

1023457 Toilet Wax Ring And Hardware Kit

K-21710-L Left-hand trip lever

K-23726 Drain treatment

K-4108 Elongated bidet toilet seat with remote control

K-30780 Quiet-Close™ elongated toilet seat

K-5381 14" rough-in full skirt trap and attachment system

K-5383 10" rough-in full skirt trap and attachment system

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	AquaPiston
Flush Rate:	1.28 gpf (4.8 lpf)
Bowl Shape:	Elongated
Waste Outlet:	Floor
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Skirted
Water Surface Size:	9-1/8" x 8-1/2" (232 mm x 216 mm)
Rim to Water Surface:	6-3/8" (162 mm)

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure:	25 psi (172.4 kPa)
Minimum Flow Rate:	0.43 gpm (1.6 l/min)



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.


5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Reach® | K-78080

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

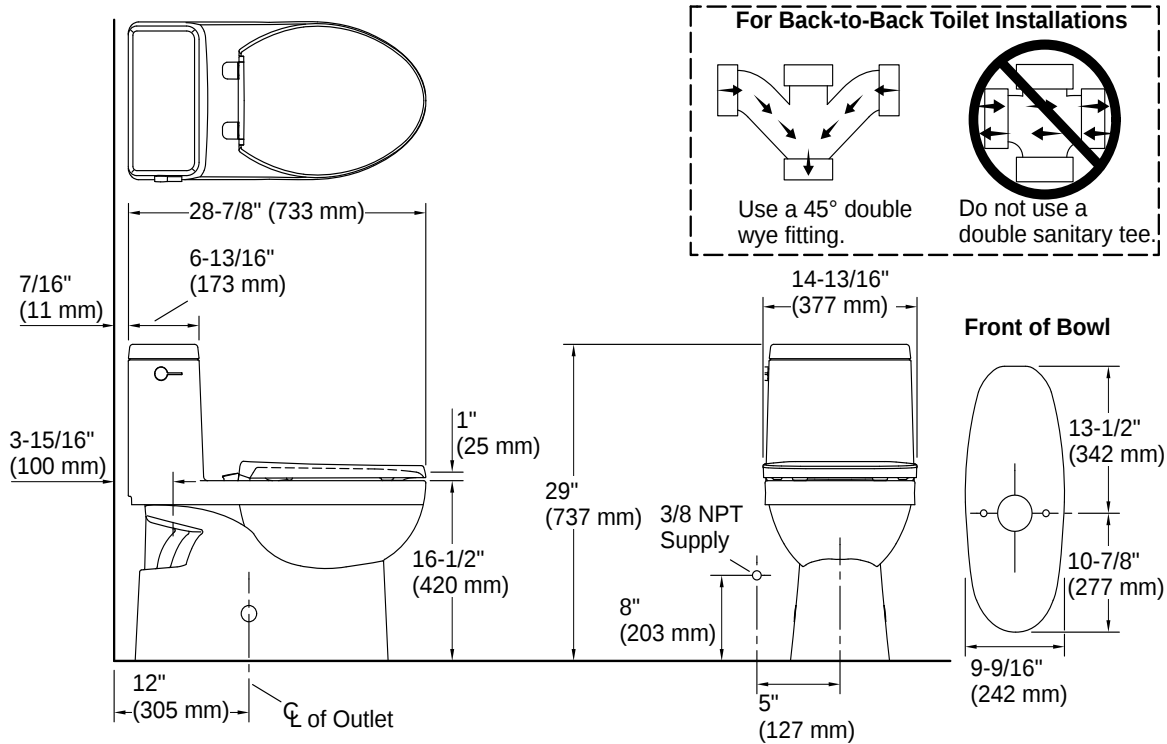

Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Supply line sold separately

Installation Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-13-2026 15:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

3

KOHLER®

Reach® | K-21710-L

Left-hand trip lever

Features

- Left-hand trip lever
- For use with the K-78080 Reach™ toilet



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|-----|-------------------------------|
| CP | Polished Chrome |
| SN | Vibrant Polished Nickel |
| AF | Vibrant French Gold |
| BN | Vibrant Brushed Nickel |
| BV | Vibrant Brushed Bronze |
| BL | Matte Black |
| 2MB | Vibrant Brushed Moderne Brass |
| TT | Vibrant Titanium |
| BGP | Vibrant Brushed Graphite |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER®**

KOHLER

Reach® | K-21710-L

Left-hand trip lever

Codes/Standards

None Applicable

Material

- Premium metal construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.


5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER**

KOHLER

Reach® | K-21710-L

Left-hand trip lever

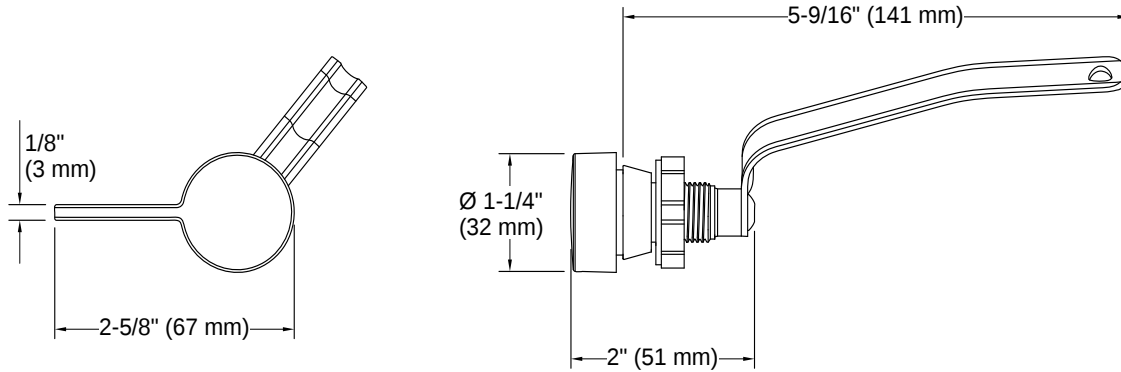

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 19:19 - US-CA

THE BOLD LOOK
OF **KOHLER**

VENDOR PART	VENDOR	DESCRIPTION	PAGE
72331100-0	Sterling Plumbing	Guard+ 60" X 34" Vikrell Shower Base, Center Drain - White	171



GUARD+®

60" x 34" Vikrell® shower base, center drain
72331100

Features


- Full-length water-containment guard and 1" (25 mm) weep channels redirect water into the base, providing four-sided water containment
- 3-1/8" (79 mm) threshold
- Durable high-gloss finish
- Textured bottom surface
- Suitable for tile-down applications
- Compatible with select STERLING Curve, Medley®, Traverse®, and STORE+® shower walls

Material

- Made from solid Vikrell® material for strength, durability, and lasting beauty

Recommended Products/Accessories

5475-59 Frameless sliding shower door
5970-59 Framed sliding shower door
5975-59 Framed sliding shower door
5976-59 Framed sliding shower door
547808-59 Frameless sliding shower door
581075-59 Frameless sliding shower door
80001012 12" straight grab bar
80001018 18" straight grab bar
80001024 24" straight grab bar
72186104 Freestanding shower seat
K-23726 Drain treatment

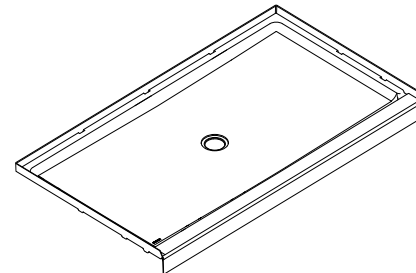

Codes/Standards

CSA B45.5/IAPMO Z124
HUD, UM Bulletin 73

STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

	0	White
--	---	-------

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.


For the most current Specification Sheet, go to www.sterlingplumbing.com.

3-21-2026 20:04 - US/CA



GUARD+®

60" x 34" Vikrell® shower base, center drain
72331100

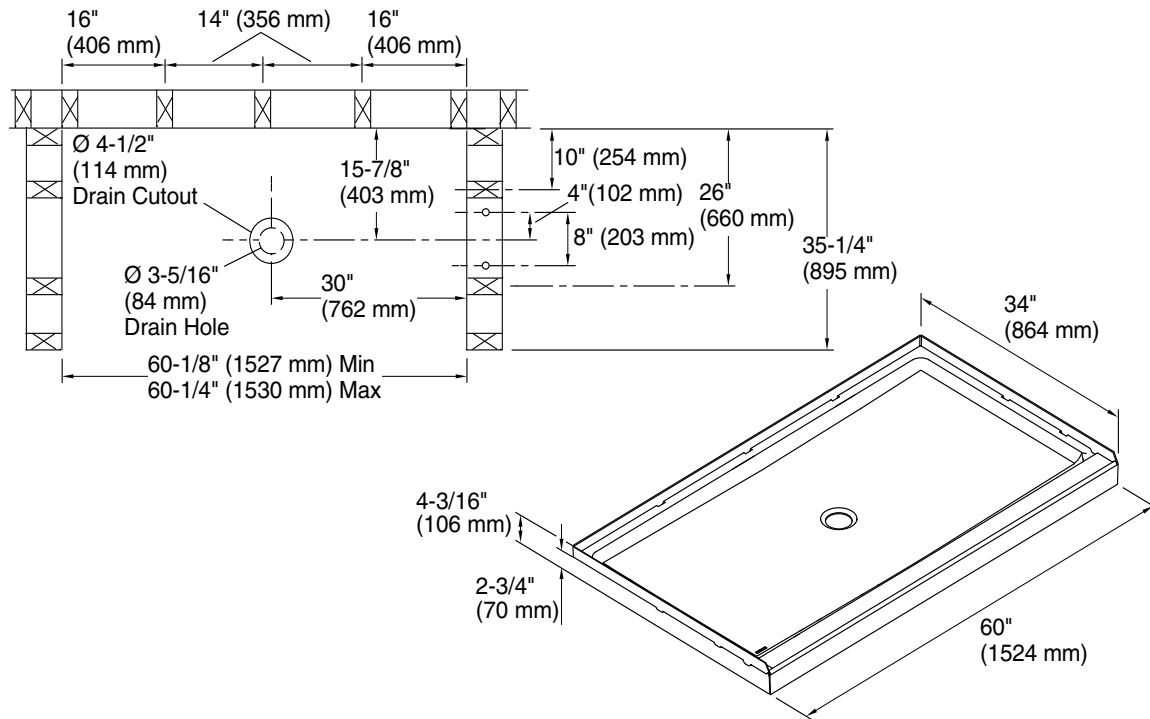

Technical Information

All product dimensions are nominal.

Drain location: Center
Weight: 37.5 lbs (17 kg)
Minimum flat to door: 2-1/2" (64 mm)

Notes

Install this product according to the installation instructions.

Studs should be positioned roughly as shown.

Double studding is recommended for pivot shower door installations.

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

3-21-2026 20:04 - US/CA