



Appliance Spec Book
Schachne Residence

Build.com

Appliances




Monogram ZTDX1FPSNSS

30 Inch Wide 10 Cu. Ft. Double Electric French Door Oven

Qty: 1

Finish: Stainless Steel

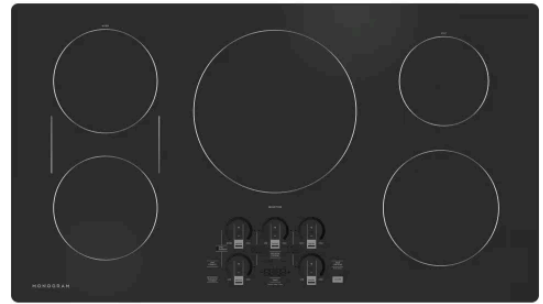

Monogram ZHU36RDTBB

36 Inch Wide 5 Burner Induction Cooktop with Built-In WiFi and Glide Touch Controls

Qty: 1

Finish: Black



Vent-A-Hood BH340PSLB SS

42" BHPSLD 900 CFM Wall Mounted Liner Insert with Triple Blowers and LED Lights

Qty: 1

Finish: Stainless Steel



Bosch SHP78CM5N

800 Series 24 Inch Wide 16 Place Setting Built-In Top Control Dishwasher

Qty: 1

Finish: Stainless Steel



Vent-A-Hood VP562

10" Diameter Modern Themed Multi-Blower Transition for Vent-A-Hood Range Hoods

Qty: 1

Finish: Galvanized Metal



Sharp SMD2470ASY

24 Inch Wide 1.2 Cu. Ft. Microwave Drawer with Push Button Opening

Qty: 1

Finish: Stainless Steel



Monogram ZISS420DNSS

42 Inch Wide 24.4 Cu. Ft. Side By Side Refrigerator with External Dispenser

Qty: 1

Finish: Stainless Steel



Monogram ZKSS2H2PNSS

Side-By-Side Refrigerator Statement Handle Kit

Qty: 1

Finish: Stainless Steel



Avallon ABR242SGRH

24 Inch Wide 140 Can Energy Efficient Beverage Center with LED Lighting, Double Pane Glass, Touch Control Panel and Right

Qty: 1

Finish: Stainless Steel



GE Profile PFW870SSVWW

28 Inch Wide 5.3 Cu. Ft. Front Loading Washing Machine with Microban Antimicrobial Technology and UltraFresh Vent System+

Qty: 1

Finish: White



GE Profile PFD87ESPVR

28 Inch Wide 7.8 Cu. Ft. Energy Star Certified Electric Dryer with Built-In WiFi and Steam Sanitize Cycle

Qty: 1

Finish: White



GE GFP1528SNWW

28 Inch Wide Laundry Pedestal with Stainless Steel Ball Bearing Storage Drawer

Qty: 1

Finish: White

PRODUCT DOCUMENTATION

Appliances

	Spec Sheets	Installation Guide	Warranty Info	Owners Manual	Additional Documents
Monogram ZTDX1FPSNSS	✓	–	–	–	–
Monogram ZHU36RDTBB	✓	–	–	–	–
Vent-A-Hood BH340PSLB SS	✓	–	–	–	–
Bosch SHX78CM5N	✓	–	–	–	–
Vent-A-Hood VP562	✓	–	–	–	–
Sharp SMD2470ASY	✓	–	–	–	–
Monogram ZISS420DNSS	✓	–	–	–	–
Monogram ZKSS2H2PNSS	–	–	–	–	–
Avallon ABR242SGRH	✓	–	–	–	–
GE Profile PFW870SSVWW	✓	–	–	–	–
GE Profile PFD87ESPVRS	✓	–	–	–	–
GE GFP1528SNWW	–	–	–	–	–

MONOGRAM 30" BUILT-IN FRENCH-DOOR DOUBLE OVEN ZTDX1FPSNSS



THE MONOGRAM STATEMENT COLLECTION

Edge-to-edge handles, polished stainless steel, and hand-finished edges convey a sense of solidity and beauty

FRENCH-DOOR DESIGN

Inspired by commercial kitchen designs, the precision engineered chain-drive mechanism allows for one-hand opening of both doors at the same time

LCD CONTROLS

Adjust oven settings with little effort with a Brilliant 7" LCD display that allows you to customize backgrounds and receive weather updates

WIFI CONNECT

Perfectly in sync with a busy lifestyle, Alexa or Google Home can be used to control an array of oven functions from both inside and outside the home

NO-PREHEAT AIR FRY

A must-have for health-conscious cooks, the No-Preheat Air Fry mode crisps food to crunchy perfection, without using oils or butter

VOICE CONTROL

Once programmed, you can use your voice to preheat the oven and more, all without raising a finger

PRECISION COOKING MODES

Master new recipes and perfectly execute favorite dishes using this ultra-smart system that automatically tracks cooking progress, modifies temperatures and adjusts cook times

SCAN TO COOK

Innovative and time saving, scan-to-cook technology ensures that packaged foods are always prepared correctly. A simple scan of the barcode with a smartphone delivers consistently, delicious result

TWIN CONVECTION WITH DIRECT AIR

Achieve beautifully cooked and delicious meals every time with this expertly designed, third heating element and fan combination

SOFT-CLOSE DOORS

An expertly engineered hinge ensures that the oven door closes quietly and smoothly, every time

10.0 CUBIC FOOT OVEN CAPACITY (5.0 EACH OVEN)

Easily accommodates even the largest meals

EXCLUSIVE SELF-CLEAN, (4 FULL-EXTENSION, 2 REGULAR) OVEN RACKS

Glide in and out smoothly on stainless steel ball bearings, and are designed to be left in the oven during the self-clean cycle

TEN-PASS BAKE ELEMENT

Covers more surface area for more even baking results

TEN-PASS DUAL BROIL ELEMENT

Evenly browns dishes of all types and sizes

SELF-CLEAN WITH STEAM CLEAN OPTION

Gives you flexible options for thorough oven cleaning

SABBATH MODE

Designed to disable functions in accordance with Sabbath-observing practices




SPECIFICATIONS

Overall Width	29 3/4" (75.6 cm)
Overall Height	51 3/16" (130.0cm)
Overall Depth	27 13/16" (70.6 cm) Upper oven
Including Handle	27 1/2" (69.9 cm) Lower oven
Oven Door Clearance	16 1/4" (41.3 cm) Upper oven 20 9/16" (52.3 cm) Upper oven
Overall Oven Interior Capacity	10.0 cu. ft. (283.2 liters)
Oven Interior Dimensions (W x H x D)	25" x 17 3/8" x 20 1/4" (63.5 cm x 44.1 cm x 51.4 cm)
Minimum Cabinet Width	30" (76.2 cm)
Minimum Cabinet Depth	24" (61.0 cm)
Minimum Base Support	400 lbs (181 kg)
Cutout Width	28 1/2" (72.4 cm) Min 28 5/8" (72.7 cm) Max
Cutout Height	50 1/4" (126.5 cm) Min 51 15/16" (131.9 cm) Max
Cutout Depth	23 1/2" (59.7 cm) Min
Volts/Hertz/Amps	240/208 V AC, 60 Hz, 40A
Conduit Length	48" (72" available special order: WB18T10398)
Electrical Rating	6.8 kW at 208V 9.0 kW at 240V
Shipping Weight	390 lbs (178 kg)

ATTENTION ELECTRICIAN:


A 240/208V, 60Hz, 40 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.

OVERALL DIMENSIONS

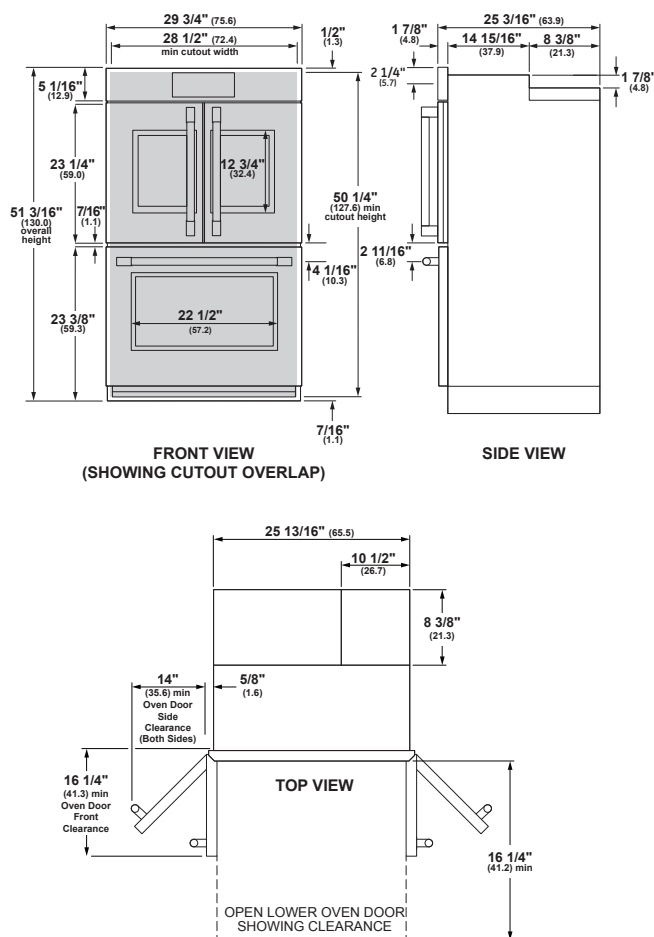

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.


WALL INSTALLATION

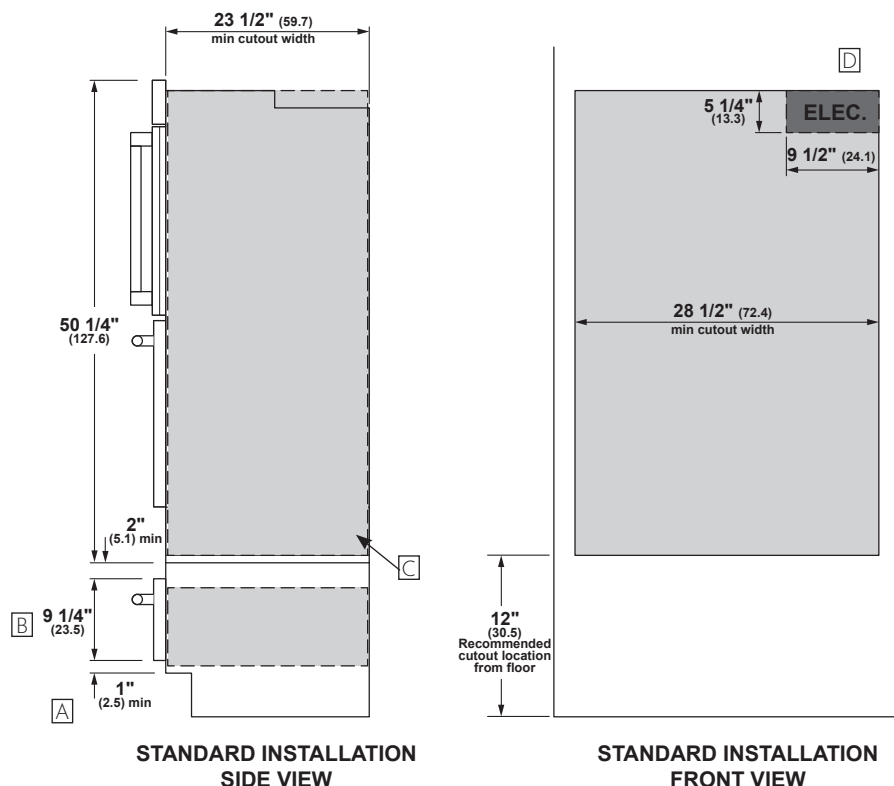

HELPFUL TIPS

- A** Based on user height of 5'6" to 5'10".
- B** Dimensions per Warming Drawer requirements.
- C** Platform must be able to support 400 lbs. (181 kg)
- D** Junction box location (May also be located in adjacent cabinet.)

INSTALLATION TO ADJACENT COUNTERTOP

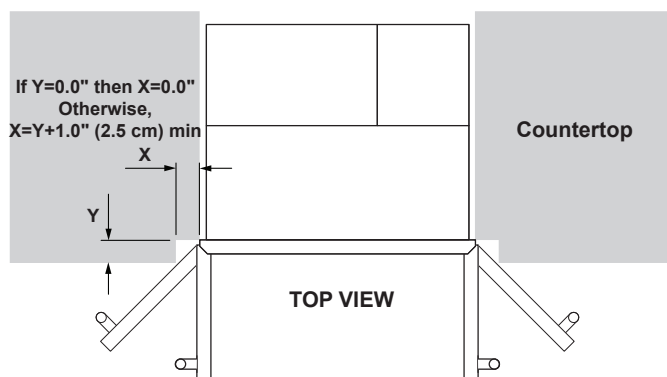

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

MONOGRAM 36" INDUCTION COOKTOP

ZHU36RDTBB



5 INDUCTION COOKING ELEMENTS

Provides rapid heat that quickly responds when you change the temperature. Electromagnetic technology heats the pan.

POWER BOIL ON TWO TRI-RING ELEMENTS

Cook faster with a variety of different pan sizes on this powerful rapid boil electric cooktop with two 3,000-watt flexible elements.

PRECISION TEMPERATURE CONTROL

Set your burner to an exact degree, not just high, medium or low, with Precision Temperature Control. Using a smart pan, the cooktop maintains a specific temperature – from 100 to 500 degrees. Perfect for sauces, candies and frying.

EASY CLEAN SURFACE WITH BEVELED EDGES

A smooth glass surface with beveled edges, glide touch controls and induction technology that ensures spills won't burn makes this an easy clean cooktop.

GLIDE TOUCH CONTROLS

Choose from 19 different heat settings with one easy swipe for precise heat control on this easy-to-clean induction cooktop.

SYNCHRONIZED ELEMENTS

Connect and control two cooktop burners as one to create a bigger cooking surface for pans such as griddles.

GUIDED COOKING

Follow along a video-guided recipe and your burners will automatically adjust time and temperature using a smart pan. Experience the joy of a perfectly cooked meal, from scallops to scrambles. Pan sold separately.

KEEP WARM SETTING

This electric cooktop's 7" element features a range of heat - from a dedicated "Keep Warm" setting to the power to boil water.

CONTROL LOCK

Protect against unintentionally turning your cooktop on with a safety control lock setting.

HOT SURFACE INDICATOR LIGHTS

A quick glance is all it takes to know when elements are hot on this induction cooktop with hot surface indicator lights.



SPECIFICATIONS




Overall Width	36" (91.4 cm)
Overall Depth	20 3/8" (51.8 cm)
Overall Height	4 5/8" (11.8 cm)
Cut-out Width	33 7/8" (86.0 cm)
Cut-out Depth	19 1/8" (48.6 cm)
Conduit Length	48" (122 cm)
Electrical Rating	11,600W at 240V/60Hz 10,100W at 208V/60Hz
Recommended Circuit Breaker Size	50 Amps
Net Weight	56 lbs. (25.4 kg)
Approx. Shipping Weight	63 lbs. (28.6 kg)

OPTIONAL ACCESSORIES

Precision Cooking Kit	JXPROBE1
Flush-Mount Kit	JXFLUSH1
Griddle	JXGRIDL1


For more details refer to the installation instructions for this product.

OVERALL DIMENSIONS

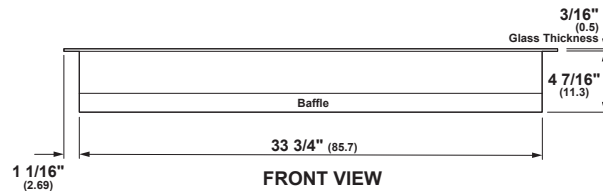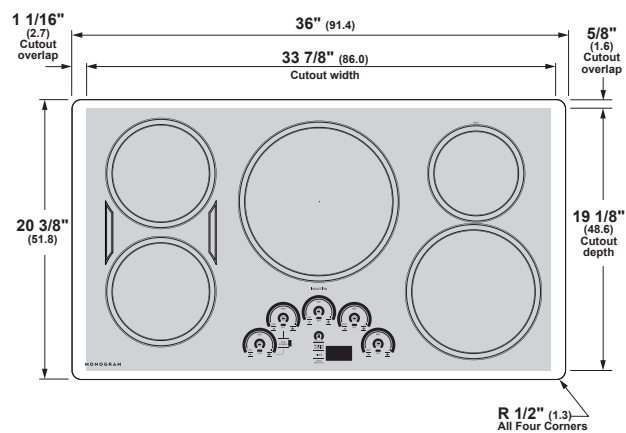

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.


INSTALLATION

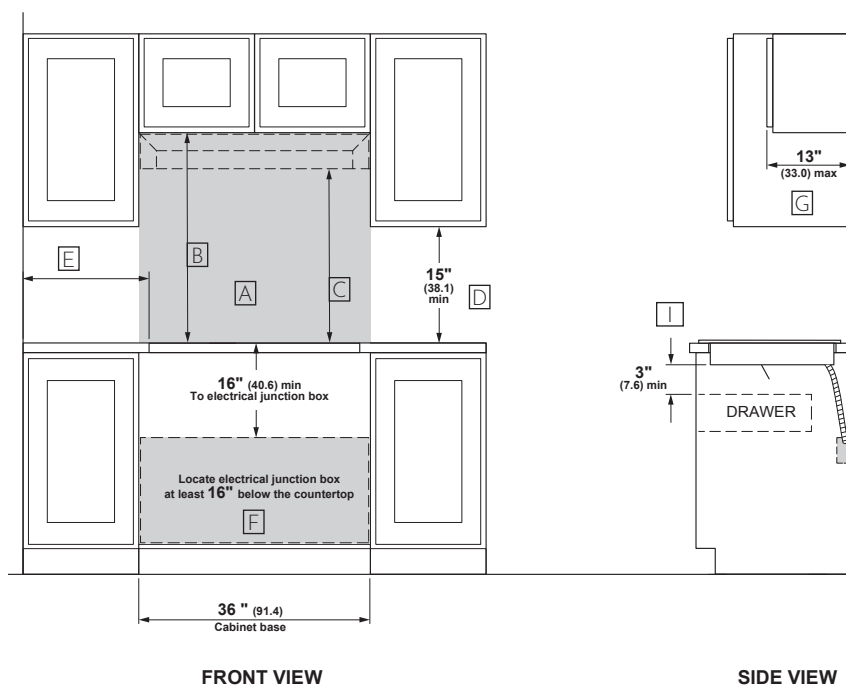


HELPFUL TIPS

- A** Wall coverings, countertop and cabinets surrounding cooktop must be able to withstand temperatures of up to 200°F.
- B** Minimum 30" clearance from countertop to unprotected overhead surfaces, when no ventilation hood or microwave oven is installed.
- C** When using a ventilation hood or microwave oven above the cooktop, see hood or microwave installation instructions for minimum overhead clearance dimensions.
- D** Minimum 15" of clearance from countertop to nearest overhead surface on both sides of cooktop. Make sure to include any lighting rail covers in calculation.
- E** Minimum 2" distance from edge of cutout to nearest adjacent side wall below upper cabinets.
- F** Install an approved junction box where it can be easily reached through the front of the cabinet where the cooktop is located. **IMPORTANT:** For serviceability, the junction box must be located where it will allow considerable slack in the 48" long conduit.
- G** Maximum 13" depth of unprotected overhead surfaces, when no ventilation hood or microwave oven is installed.
- H** For Americans with Disabilities Act (ADA) forward approach installation: Minimum 5" clearance between the top of the countertop and the enclosure. The enclosure must be made of at least 1/4" thick wood material, and must have an access panel installed in order to provide access to the junction box and hold-down brackets, and to allow for service of the cooktop.
- I** Allow 3" minimum vertical clearance for air space from the cooktop bottom (or 5-7/8" minimum depth from the countertop) to any combustible surfaces, such as the top of a cabinet drawer.

COUNTERTOP CUT-OUT DIMENSIONS

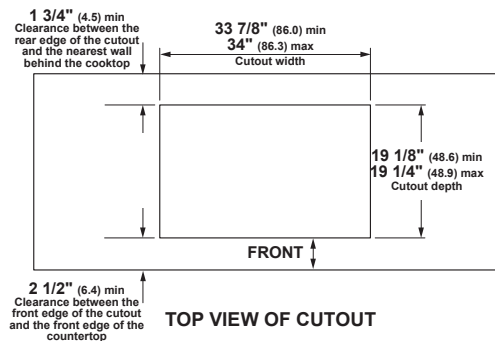


ADA INSTALLATION




Dimensions in parentheses are in centimeters unless otherwise noted.

FLUSH MOUNT INSTALLATION A

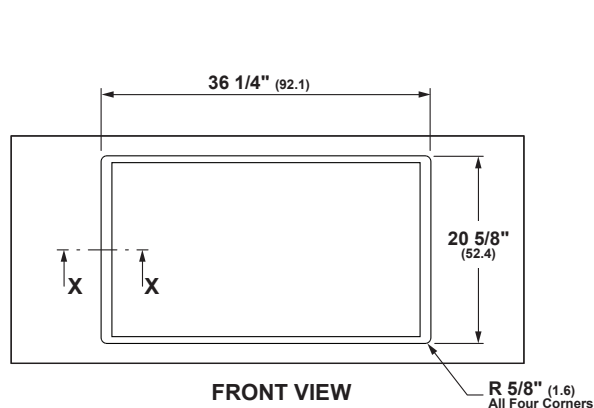


TOP VIEW OF CUTOUT

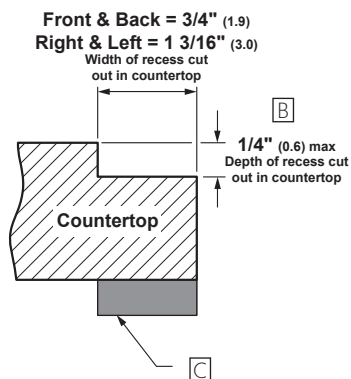

SECTION X-X


Through countertop showing depth of recess cut out for flush-mount

FLUSH-MOUNT INSTALLATION ABOVE WALL OVEN D

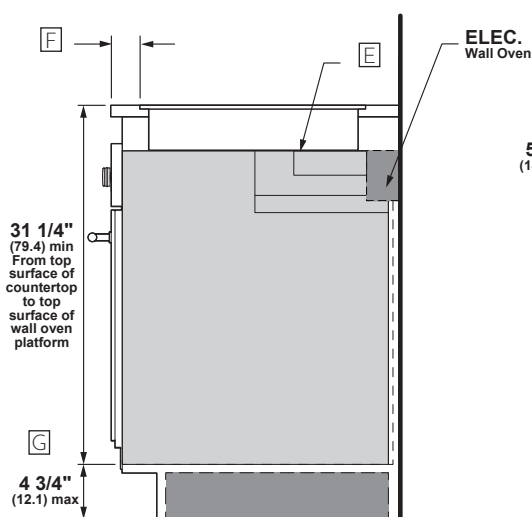

SIDE VIEW

FLUSH-MOUNT INSTALLATION ABOVE WARMING DRAWER H

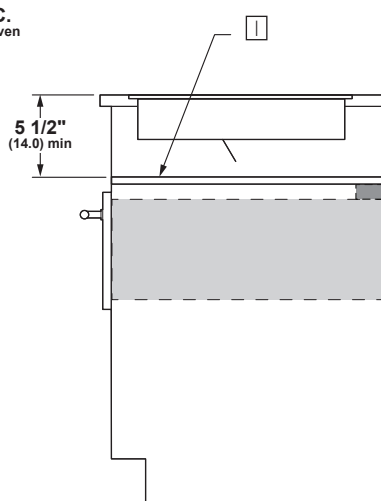

SIDE VIEW

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.


HELPFUL TIPS

- A Required to use JXFLUSH1 kit to flush-mount the cooktop into the countertop. Read all installation instructions supplied with cooktop and kit before beginning installation.
- B To avoid hot cookware from contacting the countertop surface, the cooktop should be installed at least 1/32" higher than the countertop.
- C Use strips of wood or solid-surface countertop material to reinforce the countertop below the flush-mount recess cut out. For an island or peninsular installation secure strips to all four sides, otherwise just secure strips to the front and back under the cutout.
- D Note this cooktop is only approved for installation above specific wall ovens as labeled on this unit.
- E When installing this cooktop above a single wall oven, do not install the baffle.
- F When this cooktop is installed above a flush-mounted wall oven, the clearance from the front edge of the countertop to the front edge of the cooktop cutout is minimum 2-1/2" plus the wall oven clear setback.
- G The wall oven platform must be a minimum height of 4-3/4" from the floor to ensure that the handle does not hit the floor when the door is opened.
- H Warming drawers are approved for installation below only certain specified cooktop models. See the label attached to the top of the warming drawer or underside of the cooktop for approved combinations.
- I When installing the cooktop above a warming drawer, a solid barrier must be installed at least 5-1/2" from the top of the countertop. Use any solid material such as 1/4" thick plywood. Allow at least 1/4" air gap between the barrier and the top of the warming drawer.

For more details refer to the installation instructions for this product


INSTALLATION ABOVE WALL OVEN ^[A]

*When installing this cooktop above a single wall oven, do not install the baffle.

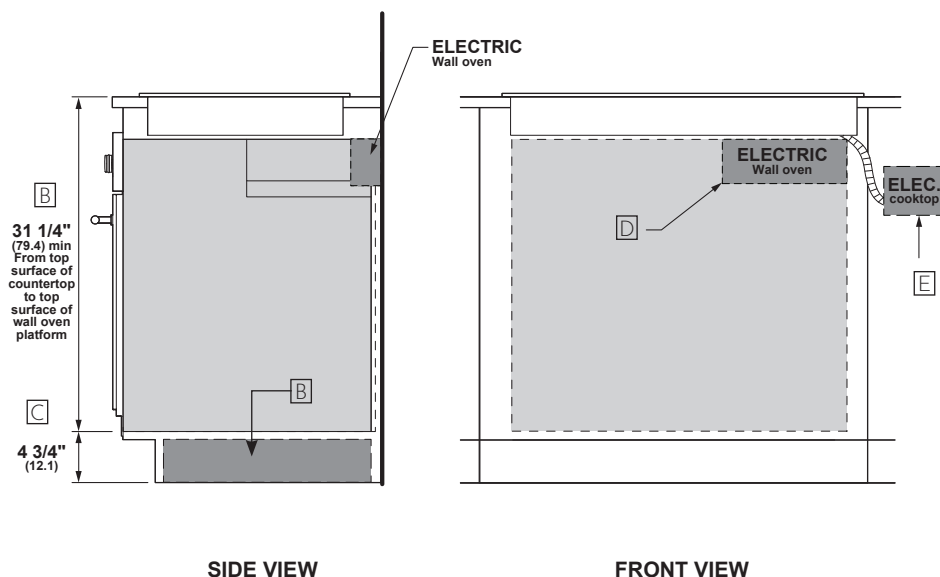

INSTALLATION ABOVE WARMING DRAWER

*Warming drawers are approved for installation below only certain specified cooktop models. See the label attached to the top of the warming drawer or underside of the cooktop for approved combinations.

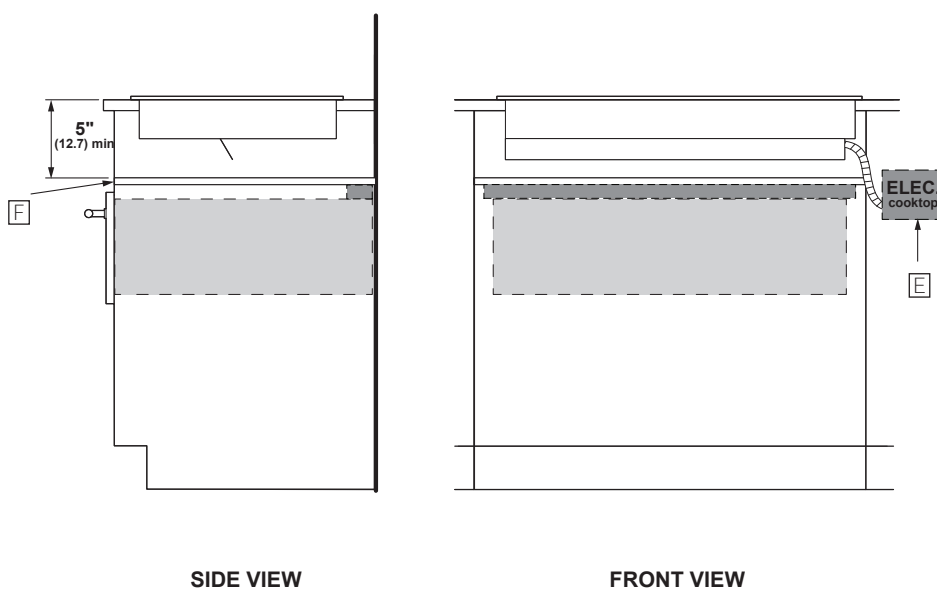

HELPFUL TIPS


- ^[A] Note this cooktop is only approved for installation above specific wall ovens as labeled on this unit.
- ^[B] Maintain a minimum distance of 31-1/4" from the top surface of the countertop to the wall oven platform to ensure that the cooktop and wall oven do not interfere with each other (see picture).
- ^[C] The cooktop platform must be a minimum height of 4-3/4" from the floor to ensure that the handle does not hit the floor when the door is open.
- ^[D] Junction box location for wall oven (may also be located in adjacent cabinet).
- ^[E] Electrical connection for cooktop must be located in an accessible adjacent location to the right (may also be located in adjacent cabinet).
- ^[F] When installing the cooktop above a warming drawer, a solid barrier must be installed at least 5" from the top of the countertop. Use any solid material such as 1/4" thick plywood. Allow at least a 2" air gap between the front of the barrier and the inside of the cabinet and at least 1/4" air gap between the barrier and the top of the warming drawer.

For more details refer to the installation instructions for this product

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.


VentA-Hood® WALL MOUNT LINER INSERT SPECIFICATIONS

BH340PSLB/BH446PSLB LINER Equipped with halogen lighting. Not available with heat lamps.

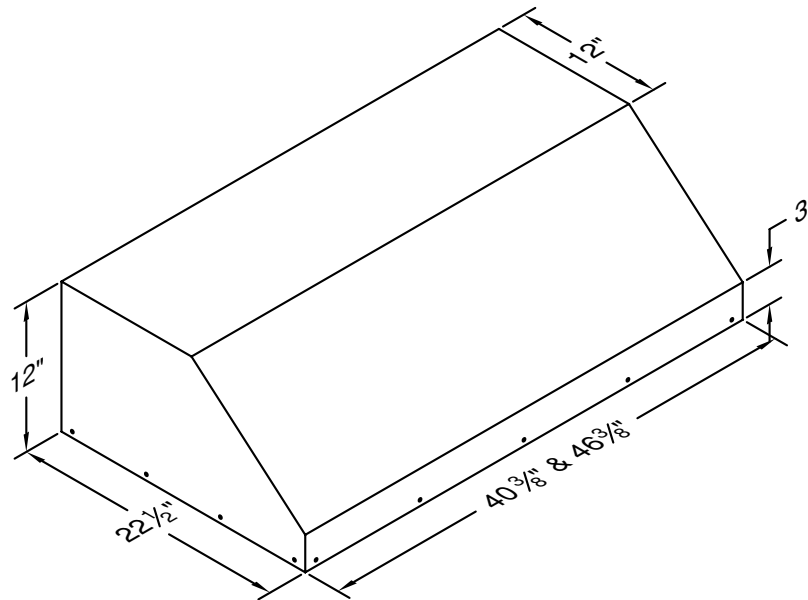


BH340PSLB/BH446PSLB

Connection Diagram (40-3/8" Width)

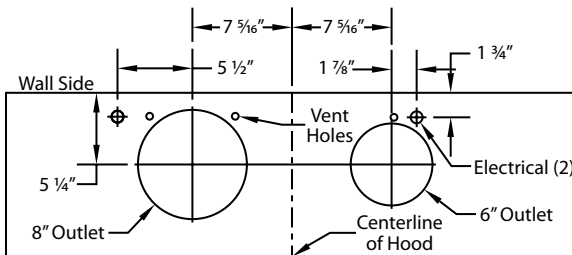


900 CFM B200 Dual & B100 Single Blowers (Top View)

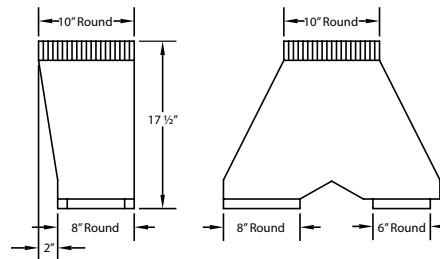


VP562 Transition (Optional) For B300 (B200 Dual & B100 Single Blowers)

Recommended Mounting Height*

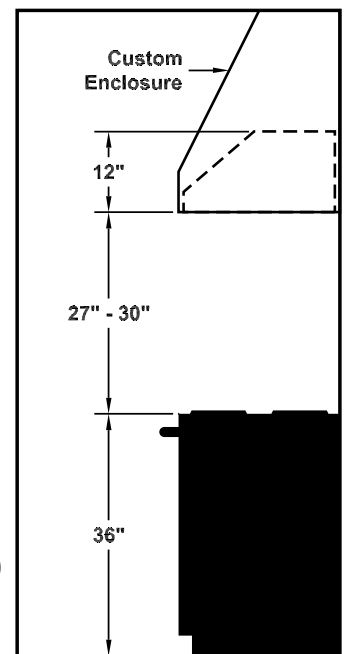


*Recommended mounting height is for optimum performance.


Connection Diagram (46-3/8" Width)

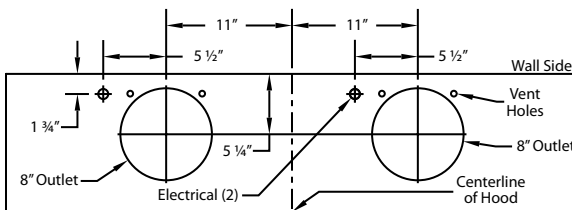

1200 CFM Double B200 Dual Blowers (Top View)

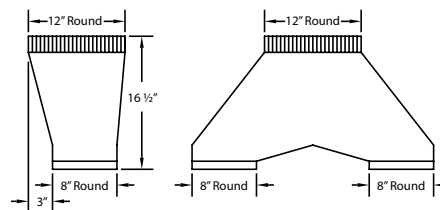

VP563 Transition (Optional) For B400 (Double B200 Dual Blowers)



Transition centers outlet over top of hood

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6

* Add 0.5 amp for each halogen light. These models are available with three halogen lights.

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0412A



24" Pocket Handle Dishwasher

800 Series – Stainless Steel SHP78CM5N



BOSCH
Invented for life



SHP78CM5N
Stainless Steel

Also available in:

White SHP78CM2N
Black SHP78CM6N
Black SHP78CM4N
Stainless

PowerControl™ spray arm targets your dirtiest dishes with a deeper clean, no matter where you load them on the bottom rack.

Features & Benefits

Patented CrystalDry™ technology transforms moisture into heat to get dishes, including plastics, 60% drier.*

The Flexible 3rd Rack with fold down sides adds 30% more* loading area, perfect for utensils and ramekins.

Enhance your cleaning experience with Wi-Fi enabled Home Connect®. Access additional wash cycles and options or choose the right one for your needs using Smart Cycle.

So quiet at 42 dBA, the InfoLight® bar shines below the handle so you know the dishwasher is running.

General Properties

Number of wash cycles	5 + 3 additional in Home Connect®
Number of options	4 + 2 additional in Home Connect®
dBA	42
Wash system	PowerControl™ with PrecisionWash®
Drying system	CrystalDry™
Third rack	Flexible 3rd Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	Touch Controls
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
Home Connect® (WiFi enabled)	Yes
NSF®-certified** sanitize option	Yes
Water softener	No
Five-level wash	Yes
Child Lock button suspension	No
Anti-Fingerprint Finish	Yes
Special features	CrystalDry™ Option, InfoLight®

Efficiency

Water usage per cycle	3.2
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption	239 kWh

Capacity

Number of place settings	16
--------------------------	----

Technical Details

Watts	1440 W
Current	12 Amps
Volts	120 V
Frequency	60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door	Left – 45" Right – 56"
Minimum water pressure	14 lb/sin
Length outlet hose	79"

Dimensions & Weight

Overall appliance dimensions (HxWxD)	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD)	33 7/8" x 24" x 24"
Adjustable feet	Yes
Net weight	96 lbs

Accessories—Optional

Junction Box	SMZPCJB1UC
Junction Box + Supply Hose Kit	SMZ3IN1UC
Bosch Dishwasher Water Supply Hose	SMZSH002UC
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Anti-Tarnish Silverware Cassette	SMZ5002UC
Edge Protector + Power Cord Clip Install Kit	SMZEPCC1UC



* Based on aggregate average drying performance of Bosch Dishwashers with CrystalDry™ on combined household load including plastics, glass, steel, and porcelain as compared to Bosch Dishwashers with PureDry®. Drying performance may vary by dish type.

**Compared to a Bosch dishwasher with 2 racks.

**Certification to NSF/ANSI Standard 184 for residential dishwashers.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.






24" Pocket Handle Dishwasher

800 Series – Stainless Steel SHP78CM5N



BOSCH
Invented for life

Installation Details

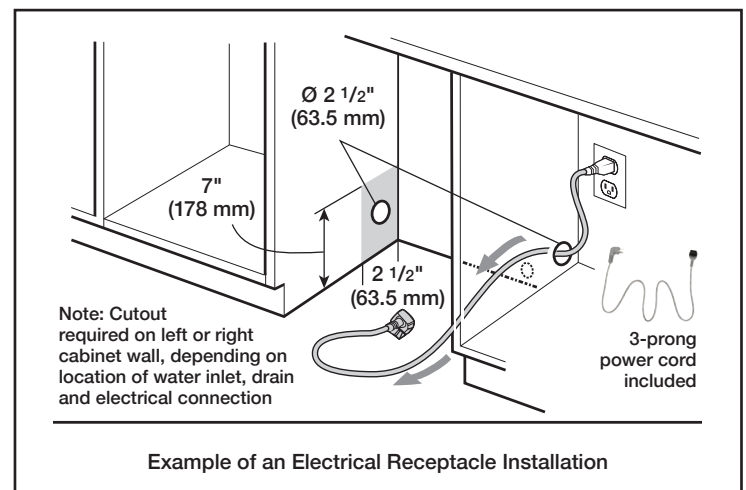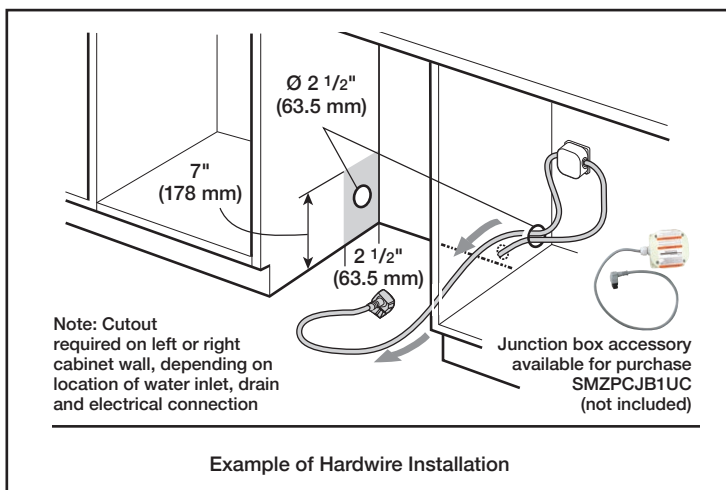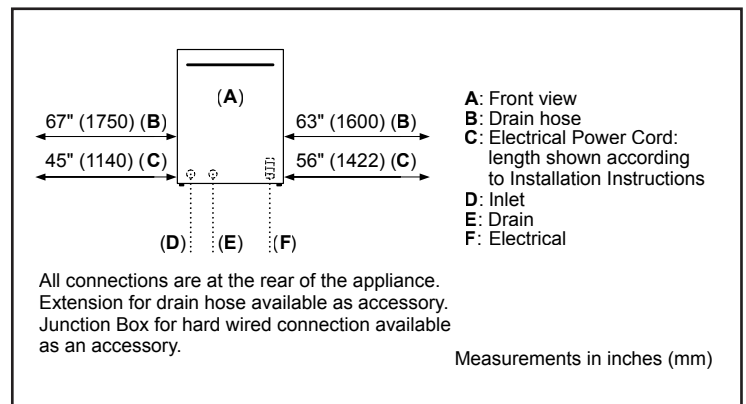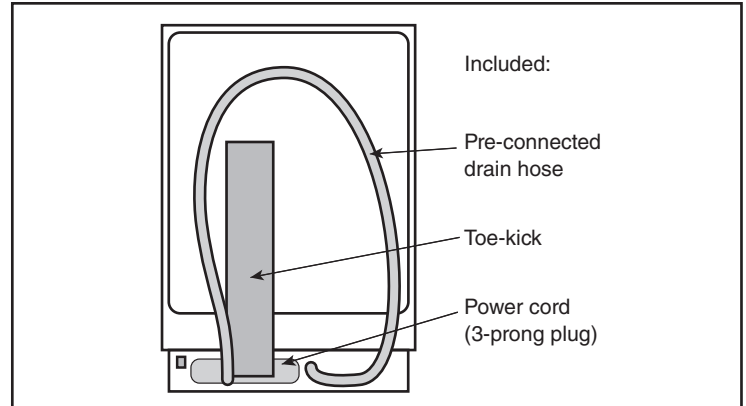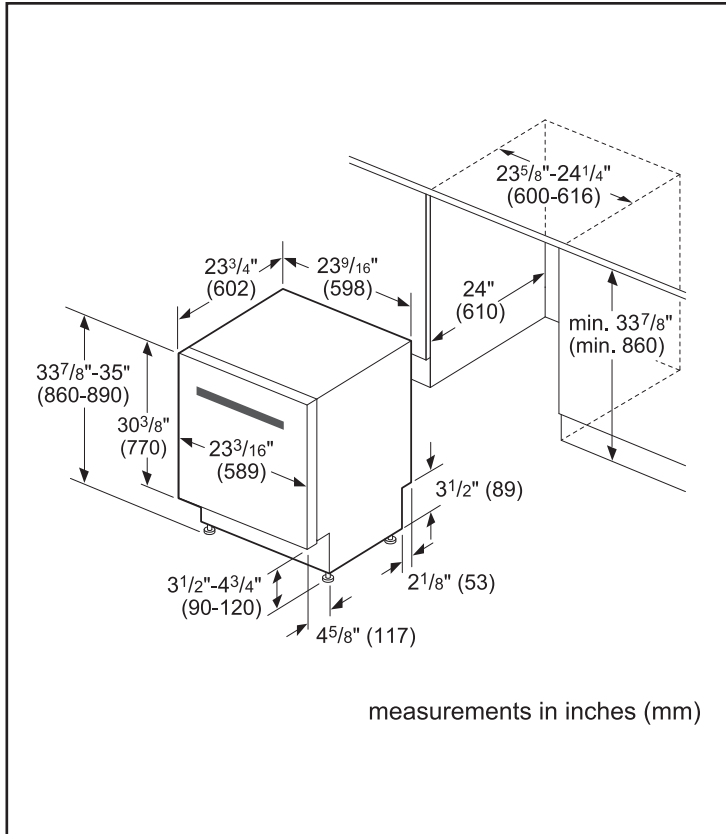

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.



24" Pocket Handle Dishwasher

800 Series – Stainless Steel SHP78CM5N



BOSCH
Invented for life

Installation Details

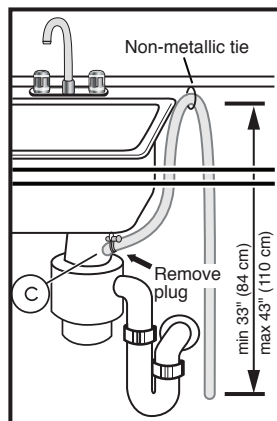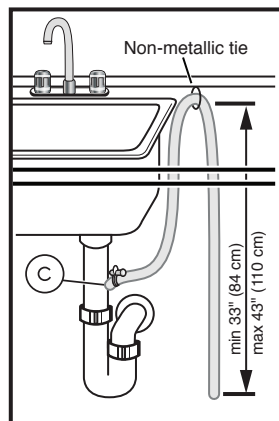

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).


Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

WALL LOUVER

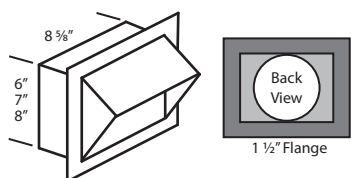


MODEL	DIM
VP526	6" Round
VP527	7" Round
VP528	8" Round

WALL LOUVER




MODEL	DIM
VP554	10" Round

WALL LOUVER




MODEL	DIM
VP555	12" Round


RECTANGULAR WALL LOUVER

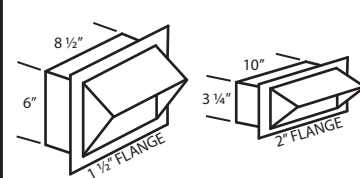


MODEL	DIM
VP538	6" x 8 1/2"
VP560	3 1/4" x 10"

LOW PROFILE ROOF JACK
(MAXIMUM 4/12 PITCH)


MODEL	DIM
VP539	6" Round
VP540	7" Round
VP541	8" Round

LOW PROFILE ROOF JACK
(MAXIMUM 4/12 PITCH)

MODEL	DIM
VP552	10" Round
VP553	12" Round


LOW PROFILE ROOF JACK
(MINIMUM 4/12 PITCH)

MODEL	DIM
VP539-HP	6" Round
VP540-HP	7" Round
VP541-HP	8" Round

LOW PROFILE ROOF JACK
(MINIMUM 4/12 PITCH)


MODEL	DIM
VP552-HP	10" Round
VP553-HP	12" Round

BACK/SIDE VENT ELBOW




MODEL	DIM
VP561	8" to 6" x 8 1/2"

ADJUSTABLE ELBOW




MODEL	DIM
VP513	6" Round
VP514	7" Round
VP515	8" Round

MULTI-BLOWER TRANSITION




MODEL	DIM
VP562	6" & 8" to 10"
VP563	8" & 8" to 12"

3 1/4" x 10" TO 7" TRANSITION




MODEL	DIM
VP521	3 1/4" x 10" to 7"

OFFSET KIT - ROUND

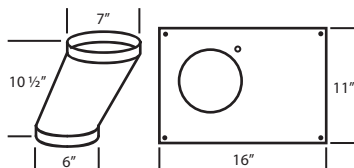


MODEL	DIM
VP529	6" Rnd to 7" Rnd

OFFSET KIT - RECTANGULAR

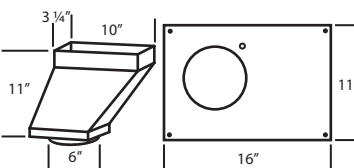


MODEL	DIM
VP550	6" Rnd to 3 1/4" x 10"

STANDARD ISLAND TRANSITION




MODEL	DIM
VP565	5" x 16" to 8" Rnd


CLUSTER BLOWER TRANSITION



MODEL	DIM
VP564	8" & 8" to 12"


OFFSET L & R TRANSITION
FOR ISLAND BLOWERS

MODEL	DIM
VP542	Top Left
VP543	Top Right

SIDE VENT TRANSITION L & R
FOR ISLAND BLOWERS


MODEL	DIM
VP544	Side Left
VP545	Side Right

"Y" TRANSITION




MODEL	DIM
VP517	8" & 8" to 12"
VP518	6" & 8" to 12"
VP551	6" & 8" to 10"

WALL COLLARS




MODEL	DIM
VP533	6" Round
VP535	8" Round
VP537	6" x 8 1/2"

3 1/4" x 10" BACK VENT ELBOW




MODEL	DIM
VP559	3 1/4" x 10"

ROUND DUCT PIPE




MODEL	DIM
VP500	6" Round
VP501	7" Round
VP502	8" Round

3 1/4" RECTANGULAR DUCT PIPE



MODEL	DIM
VP504	3 1/4" x 10"
VP505	3 1/4" x 12"
VP506	3 1/4" x 16"

6" RECTANGULAR DUCT PIPE



MODEL	DIM
VP507	6" x 8 1/2"



PARTS FOR VENT-A-HOOD PRODUCTS

MOTORS

P1301-1 SINGLE SPEED WHITE MOTOR
P1301-2 TWO SPEED WHITE MOTOR
P1302-1 BLACK MOTOR
P1315 K-SERIES MOTOR
P1900 ADAPTER (AMP PLUG/2 PRONG PLUG)

MOTOR PLUG SOCKET

P1107 CONVENTIONAL SOCKET

BLOWER WHEELS

P1305 WHITE (SINGLE OR RIGHT SIDE OF DUAL)
P1306 BLACK (LEFT SIDE OF DUAL)
P1307 K-SERIES BLOWER WHEEL

BLOWER HOUSINGS

SPECIFY HOOD COLOR

P1029 B100 BLOWER HOUSING w/DAMPER
P1028 B200 BLOWER HOUSING w/DAMPERS
P1029 T200 HSG (LEFT/WHITE MOTOR) w/DAMPER
P1030 T200 REVERSE BLOWER HSG w/DAMPER
P1021 K-SERIES BLOWER COVER

BLOWER SHIELDS

P1025 B100 ENAMEL
P1027 B100 STAINLESS
P1024 B200 ENAMEL
P1026 B200 STAINLESS
P1025 T200 ENAMEL
P1027 T200 STAINLESS
P1610 SHIELD SCREW

SWITCHES

P1402 PUSH BUTTON
P1401 SLIDE
P1408 GLAMOUR CAP (FOR SLIDE SWITCH)
P1409 MOMENTARY (TILT-OUT HOOD)
P1404 VARIABLE SPEED (OLD RM BLOWER)
P1418 DIMMER (CAN LIGHTS)
P1419 ROTARY (HEAT LIGHTS)
P1422 KNOB FOR ROTARY SWITCH
P1430 SWITCH FOR SNGL SPEED WHITE MOTOR
P1431 SWITCH FOR SNGL SPEED BLACK MOTOR
P1432 SWITCH FOR FLUORESCENT LIGHT
P1433 SWITCH FOR DUAL SPEED WHITE MOTOR
P1434 SWITCH FOR HALOGEN LIGHTS

LIGHT BULBS

P1130 50 WATT, PAR20 HALOGEN
P1110 50 WATT, GU10 HALOGEN
P1120 15 WATT, F15/T8 FLUORESCENT

LIGHT FIXTURE COMPONENTS

P1104 RIGHT LAMPHOLDER
P1103 LEFT LAMPHOLDER
P1105 STARTER
P1106 STARTER SOCKET
P1101 BALLAST (SP2 - FOR NEWER HOODS)
P1102 BALLAST (FINGER - FOR OLDER HOODS)
P1123 HALOGEN LIGHT SOCKETS

FLUORESCENT FIXTURES COMPLETE

*INCLUDES 18" FLUORESCENT LAMP
SPECIFY MODEL, SIZE, AND COLOR OF HOOD
NOT AVAILABLE IN STAINLESS, USE GUNSMOKE*
P1016 3" ENAMEL (WALL MOUNT & ISLAND)
P1018 2" ENAMEL (UNDER CABINET)
PxxxB FIXTURE WITH BACK, ADD
P1127 COVER (FLUORESCENT DIFFUSER)

REPLACEMENT FILTERS

P1502A B20 (16" x 20" x 2") MESH
P1502B B20 (10" x 20" x 2") MESH
P1506 SS BAFFLE (16" x 20" x 1-1/2")
P1506A SS BAFFLE (10" x 20" x 1-1/2")
P1501 CV (CIRCULAR 11-1/2" DIA. x 4-1/2" T)

BACK DRAFT DAMPERS

P1040 B100 (METAL - OLDER HOODS)
P1041 B200 (METAL - OLDER HOODS - 2 REQ.)
P1040 T200 (METAL - OLDER HOODS - 2 REQ.)
P1042 K-SERIES DAMPER (METAL)
P1031 NYLON POLYMER DAMPER

REMOTE BLOWER COMPONENTS

P1425 REMOTE SPEED CONTROL, COMPLETE
P1510 RM1000 BLOWER WHEEL
P1515 RM1000 MOTOR
P1520 RM1500 BLOWER WHEEL
P1525 RM1500 MOTOR

MISCELLANEOUS

P1039 FLAP STAY FOR TILT-OUT HOODS
AW101 T-HANDLE, 1/8" ALLEN WRENCH
AW102 STANDARD, 1/8" ALLEN WRENCH
P1424 THERMOSTAT FOR SENSASOURCE
SS KIT STAINLESS STEEL SCRATCH REPAIR KIT
SS64 STAINLESS STEEL MAGIC
CP101 RED BEAR COPPER POLISH
P1316 3-1/4" x 10" COLLAR FOR K-SERIES
P1317 BACK PLATE FOR K-SERIES

SHARP®

Simply Better Living

MICROWAVE DRAWER™

SMD2470AS

1.2
CU.FT.

950
WATTS

Easy Touch automatic drawer system smoothly opens and enables hands-free close

Convenient kitchen placement allows for easier cooking, saves prep and clean up time

Concealed control panel opens to an easy-to-read and operate 45° angle

Cooking space large enough for a 4 qt casserole dish or a 20 oz beverage

Cooking performance from one of the most trusted brands in microwaves



DESIGNED FOR YOUR DREAM KITCHEN

It's your kitchen, your design and your lifestyle. Sharp's Microwave Drawer™ Oven allows you to focus on the design elements you prefer by removing the microwave from sight-lines and enabling more design versatility than typical built-in, over-the-range or countertop microwaves. The Microwave Drawer™ offers flexible placement options below an island, peninsula, or standard cabinetry, and can also be installed adjacent to your wall oven. The Microwave Drawer™ allows you to showcase your design savvy and create a kitchen that flows with your lifestyle.

The Sharp Microwave Drawer™ Oven boasts an easy-to-read display that disappears until you need it. The concealed control panel opens at a 45-degree angle, so it's easy to read and operate. Sharp's exclusive Easy Touch Automatic Drawer system eases open with the touch of a button. Give the drawer a small nudge and it smoothly shuts for you. The even, gliding action and solid construction helps prevent liquids from spilling during opening and closing.



1.2 cu. capacity large enough for a 4-qt casserole dish and tall enough for a large, 20 oz. beverage cup. (Installed in a kitchen island)



Cooking and cleaning is made easier by putting the microwave at an accessible height. (Installed under a counter)



Designed to complement the widest range of kitchen styles and appliances, including our SuperSteam+. (Paired with a built-in wall oven)

SHARP ELECTRONICS CORPORATION
100 Paragon Drive, Montvale NJ, 07645
1.800.237.4277 • www.sharppusa.com

SHARP®
Be Original.

SHARP | Simply Better Living

MICROWAVE DRAWER™

SMD2470AS

1.2
CU.FT.

950
WATTS

SPECIFICATIONS

FEATURES

Finish	Stainless Steel
Drawer Opening	Easy Touch Automatic
Capacity*	1.2 cu. ft. (holds 9" x 13" dish)
Output Power	950 watts
Sensor Cook, Reheat and Popcorn	Yes, 12 settings
Reheat Auto Settings	2 settings
Defrost Auto Settings	6 settings
Microwave Keep Warm Setting	Yes, up to 30 minutes
Clock	Yes
Minute Plus™	Yes
Interior Oven Light	Yes
Kitchen Timer	Yes
Control Lock	Yes
Demonstration Mode	Yes
Built-In Ready for Easy Installation	Yes

CONTROL PANEL

Control Panel Location	Center/Top
Control Panel Type	Touchpad, Drop-Down 45° Angle
Display Type	LCD
Display Color	White on Black Background

OPTIONAL ACCESSORY

24" Flush Mount Deflector Vent	SKMD24F0AS
Flush Mount Deflector Vent Kit	(1) PREF-B019MRP0 (2) LX-CZB055MRE0

ADDITIONAL SPECIFICATIONS

Power Connection:	3-Prong Grounding Plug (included)
Power Ratings:	120V, 60Hz / 1.67kW, 14.5 Amps
Safety Compliance:	FCC, DHHS, UL listed


DIMENSIONS & WEIGHT (in./lbs.) (w x h x d)

Cutout Dimensions:	22 1/8" x 15 9/16" x 23 1/2"
Dimensions:	23 7/8" x 15 7/8" x 23 1/4"
Shipping Weight (lbs.):	86
Product Weight (lbs.):	74


WARRANTY/UPC

Parts	1 year
Labor	1 year
Magnetron Tube	5 years total (part only)
UPC	074000619371

CLICK TO DOWNLOAD INSTALLATION GUIDE

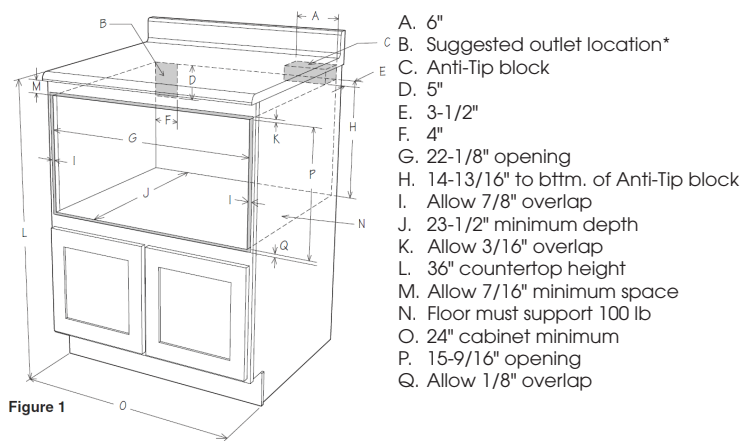

- A. 21-5/8"
- B. 4-11/16"
- C. 1-3/4"
- D. 21-7/8"
- E. 23-7/8"
- F. 15-7/8"
- G. 14-19/32"
- H. 1-9/64" door thickness
- I. 15" auto drawer opening
- J. 4"

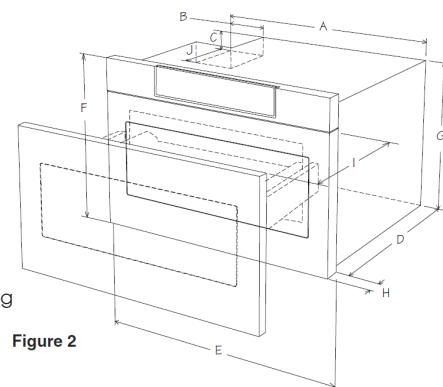

Internal capacity calculated by measuring maximum width, depth and height. Actual capacity for holding food is less.

Product specifications and design are subject to change without notice.

© 2018 Sharp Electronics Corporation. All rights reserved.

Sharp, Microwave Drawer, Supersteam+, Healsio, Plasmacluster and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. All other trademarks are property of their respective owners.

QUESTIONS?

1.800.BE.SHARP

SIMPLY BETTER LIVING

At Sharp Home Electronics Company of America, we are committed to Simply Better Living. Our innovative home appliance products are SIMPLE to use, BETTER than the competition, and encourage a HEALTHY LIFESTYLE.

SHARP ELECTRONICS CORPORATION
100 Paragon Drive, Montvale NJ, 07645
1.800.237.4277 • www.sharppusa.com



SHARP
Be Original.

MONOGRAM 42" BUILT-IN SIDE-BY-SIDE REFRIGERATOR

ZISS420DNSS



STATEMENT HANDLE

Model is shown with the Statement handle, which needs to be ordered separately. To order this handle use model number ZKSS2H2PNSS.



MINIMALIST HANDLE

Model is shown with the Minimalist handle, which needs to be ordered separately. To order this handle use model number ZKSS2H2CNSS.

When ordering this product, be sure to use the model number associated with the chosen handle.



Statement handle
ZKSS2H2PNSS



Minimalist handle
ZKSS2H2CNSS

ADVANCED TEMPERATURE MANAGEMENT SYSTEM WITH MULTI-SHELF AIR TOWER

Provides even distribution of air throughout the refrigerator

CLIMATE-CONTROL DRAWER

Allows you to express-chill beverages, express-thaw meats and select specific temperatures for perishable foods

WIFI CONNECT

Enjoy the convenience and freedom of wirelessly controlling functions from your smartphone

LED LIGHTING

Light columns in the freezer and fresh food compartments extend the full length of the interior and LED lighting located inside the vegetable and climate-control drawers illuminate contents without compromising space

TRUE STAINLESS DISPENSER

Designed to accommodate glassware of all sizes, from pitchers to tumblers

GE® WATER FILTER

Has been moved from the fresh food compartment to the overhead cabinet, where it is discreetly out of sight

DELI DRAWER ON FULL-EXTENSION SLIDES

Keeps meats, cheeses and other everyday foods within easy reach

SEALED VEGETABLE DRAWER

Helps preserve the freshness of foods

ADJUSTABLE GLASS SHELVES

Easily accommodate party trays and platters

SABBATH MODE

Designed to disable functions in accordance with Sabbath-observing practices




SPECIFICATIONS

Overall Width	42" (106.7 cm)
Overall Height	84" (213.4 cm)
Overall Depth	25 3/4" (65.4 cm)
Door Clearance	26 9/16" (67.5 cm)
Cutout Width	41 1/2" (105.4 cm)
Cutout Height	83 1/2" - 84 1/2" (212.1 - 214.6 cm)
Cutout Depth	24" (61.0 cm)
Plumbing Requirements	1/4" OD copper tubing or GE SmartConnect kit
Shipping Weight	750 lb


ATTENTION ELECTRICIAN:

A 115 volt 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.

OVERALL DIMENSIONS

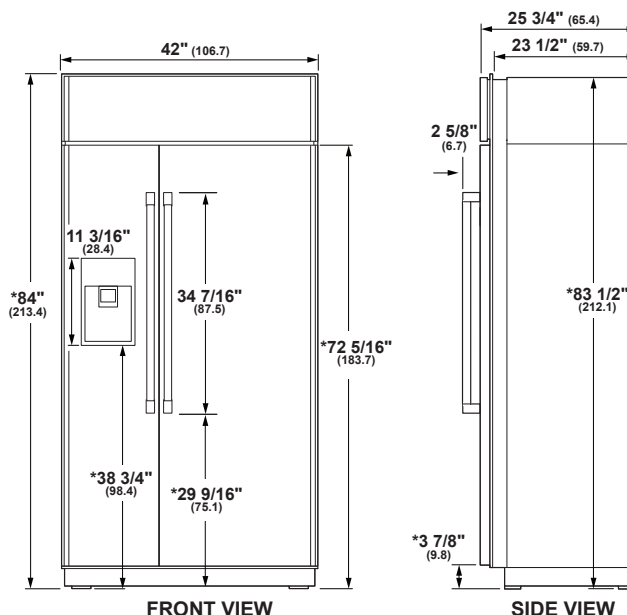


* Shipping height. Use leveling legs and wheels for maximum 1" height adjustment from shipping height.

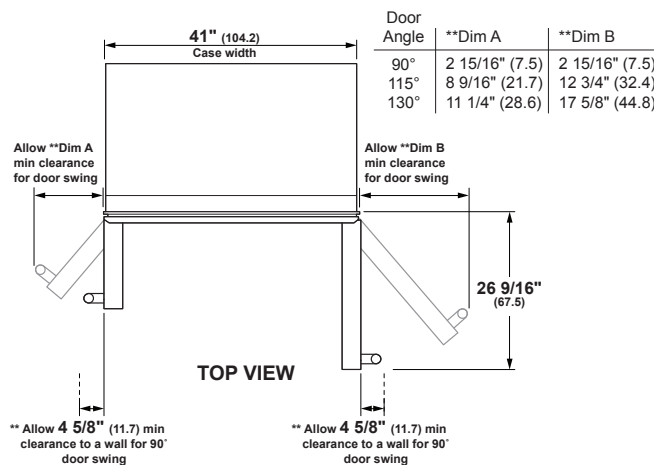

** These refrigerators are equipped with a 3-position door stop. The factory-set 115° door swing can be adjusted to 90° if clearances to adjacent cabinets or walls is restricted. Allow full 130° door swings for pan removal. If the 90° door stop position is used, pan access is maintained, but pan removal is restricted.


Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

STANDARD INSTALLATION

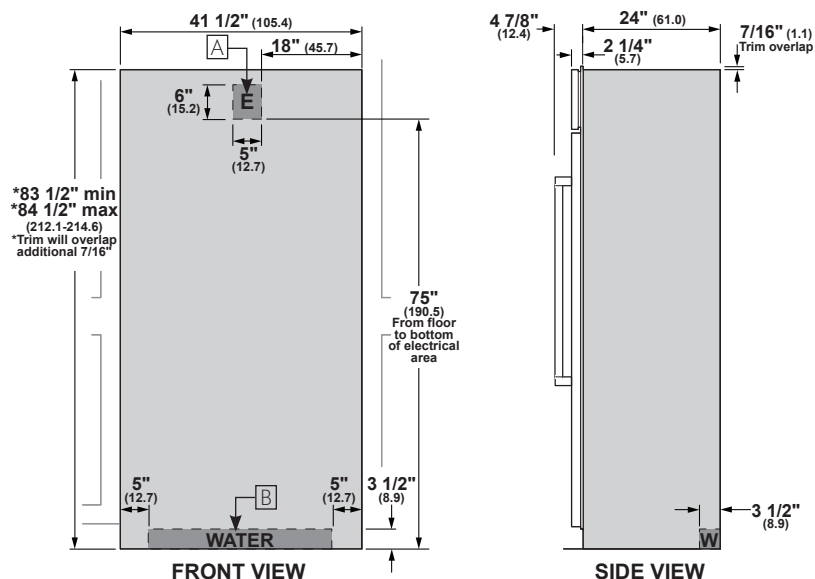

The refrigerator will project forward, slightly beyond adjacent cabinetry.

ANTI-TIP BRACKET

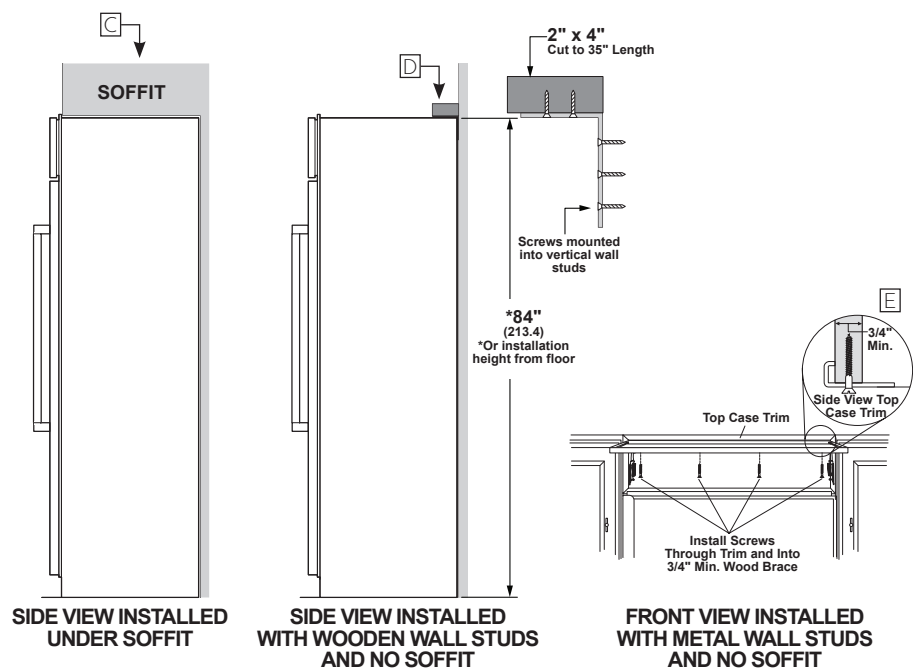

HELPFUL TIPS

A Mounting the junction box in this location will also allow for front accessibility through access panel.

B Water supply area.

⚠ WARNING:

The refrigerator is top heavy and must be secured to prevent the possibility of tipping forward. Failure to do so may result in death or serious injury.

The information below is for cabinet design only. When installing the anti-tip system you must use the product installation instructions.

Determine your installation construction and required anti-tip configuration.

C Installed Under Soffit

After installing unit into installation opening, raise grille panel and screw metal case sides to adjacent cabinet. When installed under a soffit, the soffit cannot exceed 24" deep. The top case trim overlaps the bottom of the soffit.

D Wooden Wall Studs and No Soffit

- Cut a 2" x 4" block and secure to brackets provided.
- Secure brackets to back wall of opening at 84" or your installation height from the floor.


E Metal Wall Studs and No Soffit

This method requires securely fastened cabinets on both sides and a 3/4" minimum wood brace above unit, with it's front surface 24" from back wall.

- After installing unit into opening, raise grille panel and attach metal case top trim to 3/4" minimum wood brace.
- The brace spanning the enclosure must be securely fastened to cabinets on both sides.

See Installation Instructions for detailed instructions.

CUSTOM SIDE PANELS

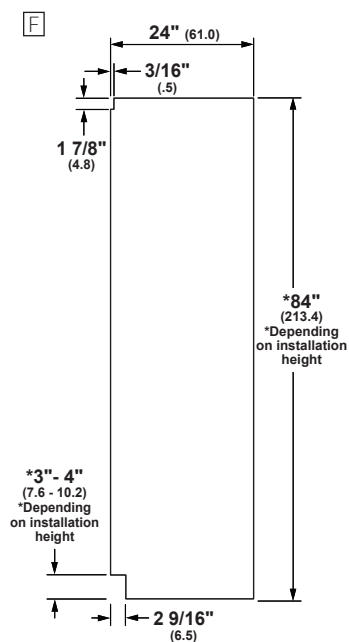

HELPFUL TIPS

- Side panels must be used whenever the sides of the refrigerator will be exposed. The 1/4" side panels will slip into the side case trim. Secure the panels to the refrigerator with stick-on hook and loop fastener strips. Order the side panels from the cabinet manufacturer.

Specification Sheet

Model: ABR242PRG

BEVERAGE REFRIGERATOR



24-Inch Single Zone Undercounter Beverage Refrigerator, Panel-Ready Door

Features

- 149-can capacity built-in low temp beverage refrigerator
- White, blue and amber interior LED lighting options
- UV-resistant glass door with low-e, double-panes and argon gas between the two panes
- Touch panel with digital controls
- Clear tempered glass shelves
- Added security with a door lock
- Sabbath mode

Please note: Panel-ready appliances are designed to utilize custom panels to match your cabinetry. The panel-ready finish option does not include the pictured wood paneling.

Warranty

- One (1) year parts and labor
- Five (5) years compressor (part only)



Model Details


Model	Voltage	Door Swing	Finish
ABR242PRGLH	115V	Left Hinge	Panel-Ready Door
ABR242PRGRH	115V	Right Hinge	Panel-Ready Door

Accessories


Model	Description	Finish
PCWRFILTER	Replacement Carbon Filter	Gray
HDLPRO	PRO Style Handle for Undercounter Models	Stainless Steel
ADKP48SS	Dual Kickplate (intended for side-by-side installations of two 24" models)	Stainless Steel




Exterior Dimensions

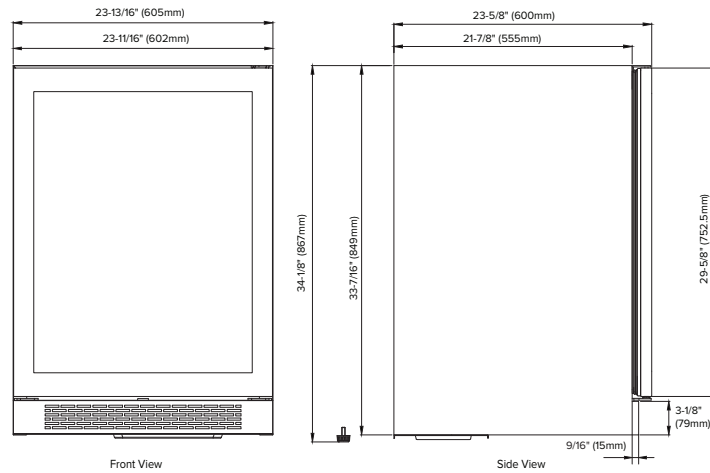

Interior Dimensions

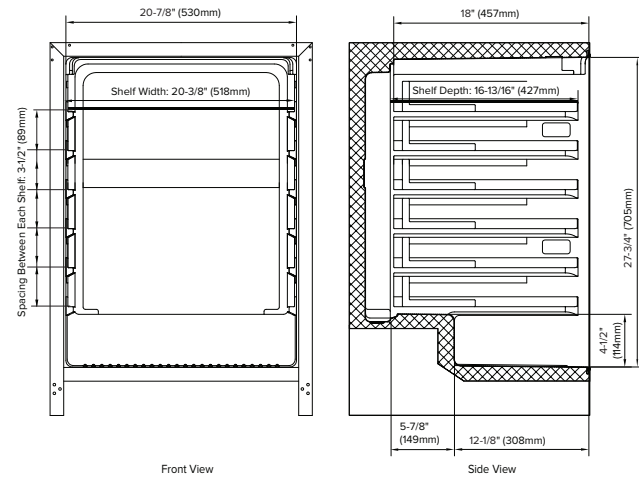

Door Swing

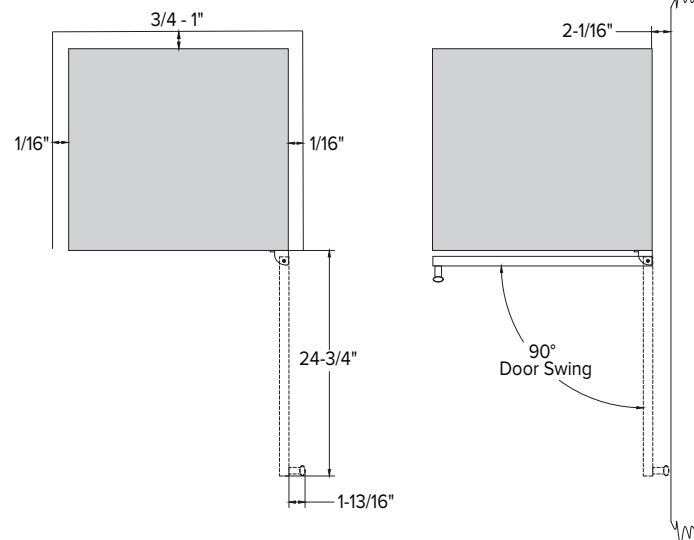


Specifications

Model#	ABR242PRG
Can Capacity (12 oz.)	149
Capacity (Volume)	5.65 cu ft
Product Depth	23-5/8"
Product Depth with Handle	25-7/16"
Product Height	34-1/8"
Product Width	23-13/16"
Product Weight	110 lbs
Refrigerant Type	R600a
Temperature Range	34°F - 65°F
Power Cord Length	6'
Amps	1.5
Electric Supply	115 VAC, 60 Hz



Cutout dimensions

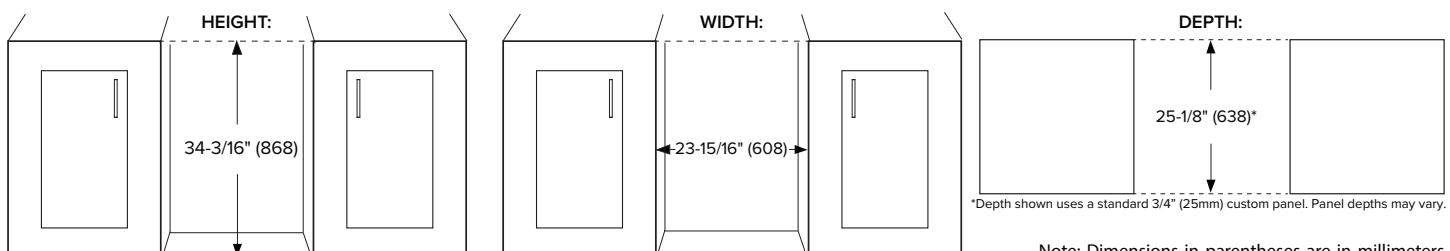

Note: Dimensions in parentheses are in millimeters. Specifications are subject to change without notice. Visit Avallon.com for the latest information.

Specification Sheet

Model: ABR242PRS

BEVERAGE REFRIGERATOR



24-Inch Single Zone Undercounter Beverage Refrigerator, Solid Panel-Ready Door

Features

- 149-can capacity built-in low temp beverage refrigerator
- White, blue and amber interior LED lighting options
- Touch panel with digital controls
- Clear tempered glass shelves
- Added security with a door lock
- Sabbath mode

Please note: Panel-ready appliances are designed to utilize custom panels to match your cabinetry. The panel-ready finish option does not include the pictured wood paneling.

Warranty

- One (1) year parts and labor
- Five (5) years compressor (part only)



Model Details


Model	Voltage	Door Swing	Finish
ABR242PRSLH	115V	Left Hinge	Solid Panel-Ready Door
ABR242PRSRH	115V	Right Hinge	Solid Panel-Ready Door

Accessories


Model	Description	Finish
PCWRFILTER	Replacement Carbon Filter	Gray
HDLPRO	PRO Style Handle for Undercounter Models	Stainless Steel
ADKP48SS	Dual Kickplate (intended for side-by-side installations of two 24" models)	Stainless Steel




Exterior Dimensions

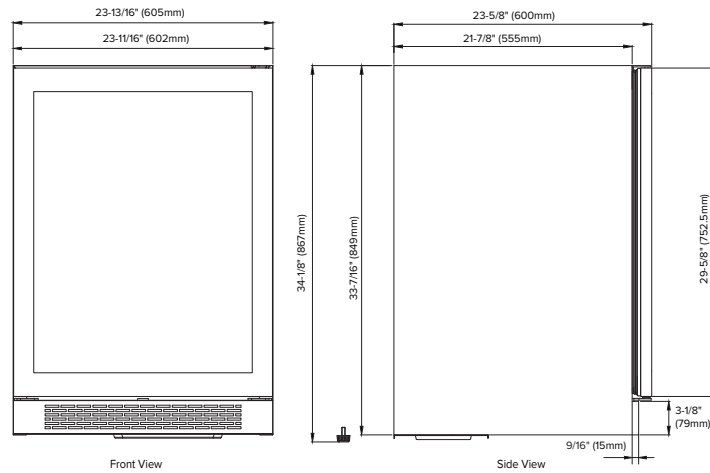

Interior Dimensions

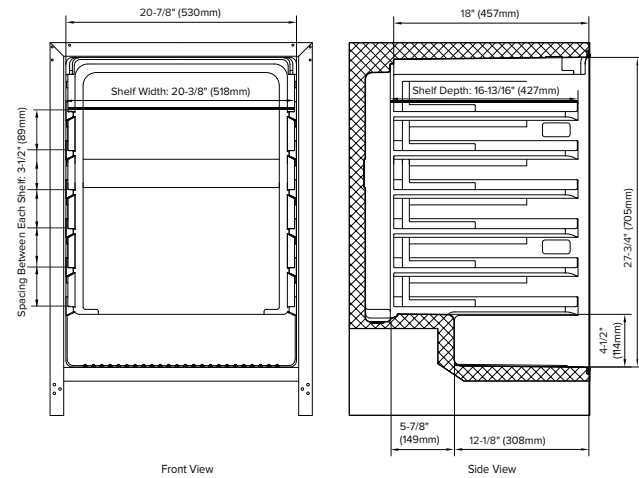

Door Swing

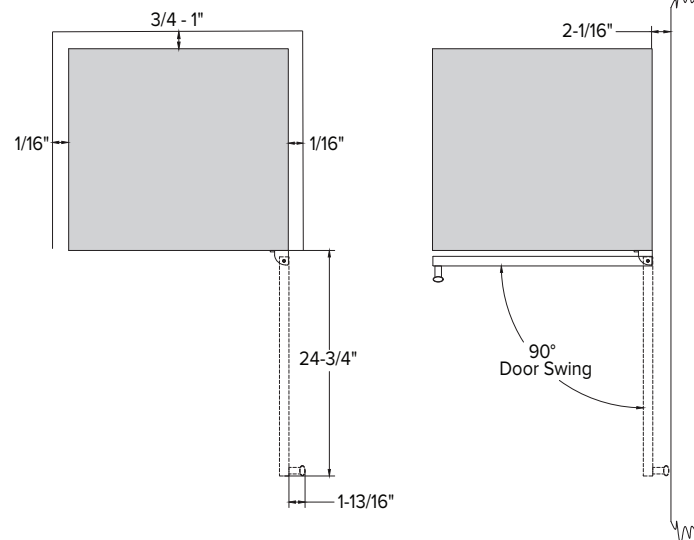


Specifications

Model#	ABR242PRS
Can Capacity (12 oz.)	149
Capacity (Volume)	5.65 cu ft
Product Depth	23-5/8"
Product Depth with Handle	25-7/16"
Product Height	34-1/8"
Product Width	23-13/16"
Product Weight	98 lbs
Refrigerant Type	R600a
Temperature Range	34°F - 65°F
Power Cord Length	6'
Amps	1.5
Electric Supply	115 VAC, 60 Hz



Cutout dimensions

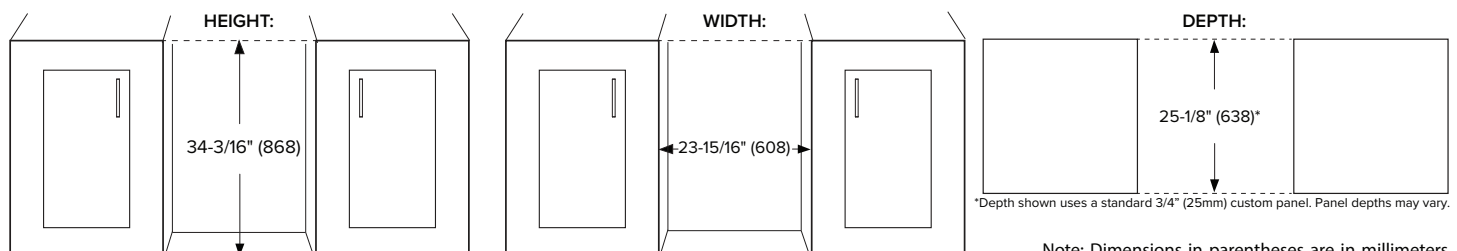

Note: Dimensions in parentheses are in millimeters. Specifications are subject to change without notice. Visit Avallon.com for the latest information.

Specification Sheet

Model: ABR242SG

BEVERAGE REFRIGERATOR



24-Inch Single Zone Undercounter Beverage Refrigerator, Stainless Steel Door

Features

- 140-can capacity built-in low temp beverage refrigerator
- White, blue and amber interior LED lighting options
- Seamless, stainless steel trimmed glass door
- UV resistant glass door with low-e, double-panes and argon gas between the two panes
- Touch panel with digital controls
- Clear tempered glass shelves
- Added security with a door lock
- Sabbath mode

Warranty

- One (1) year parts and labor
- Five (5) years compressor (part only)



Model Details


Model	Voltage	Door Swing	Finish
ABR242SGLH	115V	Left Hinge	Stainless Steel
ABR242SGRH	115V	Right Hinge	Stainless Steel

Accessories


Model	Description	Finish
PCWRFILTER	Replacement Carbon Filter	Gray




Exterior Dimensions

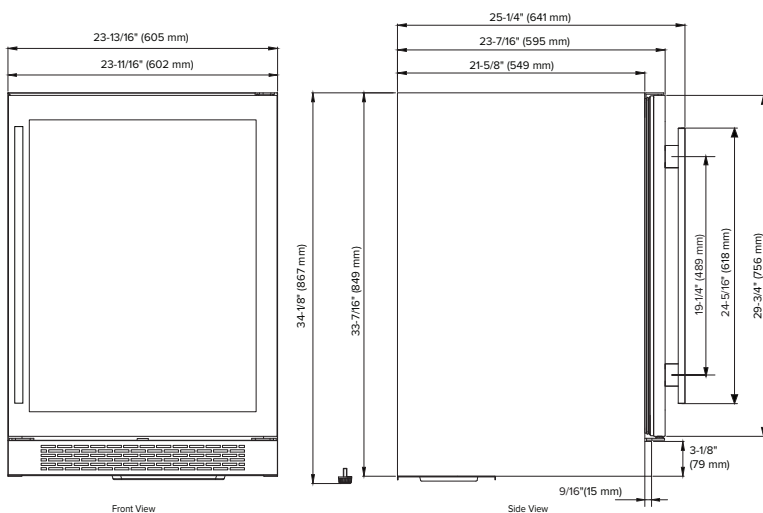

Interior Dimensions

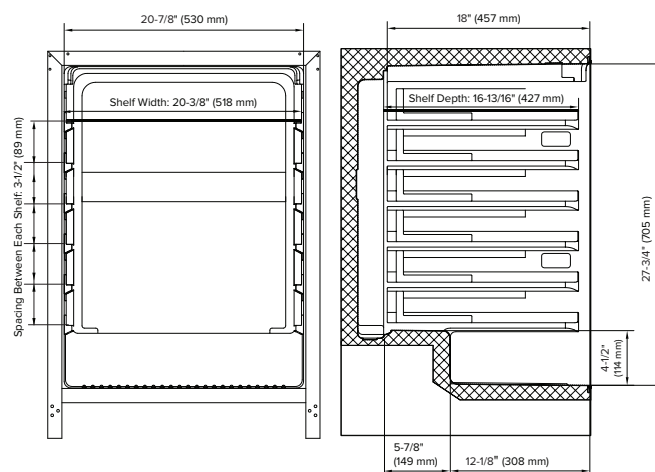

Door Swing

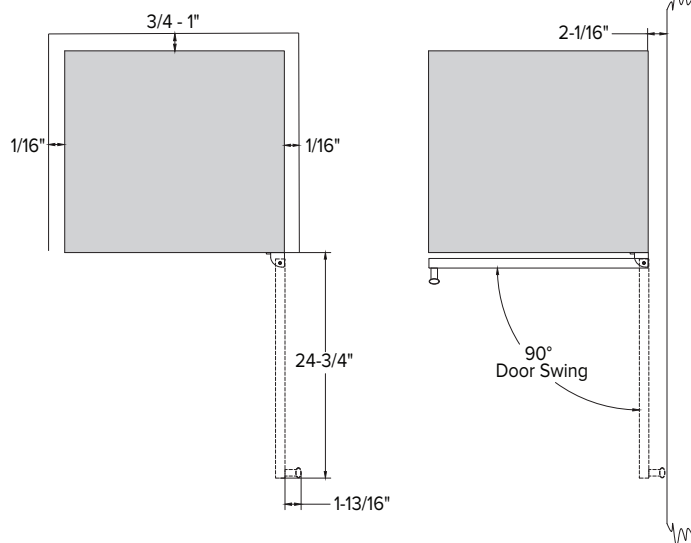


Specifications

Model#	ABR242SG
Can Capacity (12 oz.)	140
Capacity (Volume)	5.65 cu ft
Product Depth	23-7/16"
Product Depth with Handle	25-1/4"
Product Height	34-1/8"
Product Width	23-13/16"
Product Weight	112 lbs.
Refrigerant Type	R600a
Temperature Range	34°F - 65°F
Power Cord Length	6'
Amps	1.5
Electric Supply	115 VAC, 60 Hz



Cutout dimensions

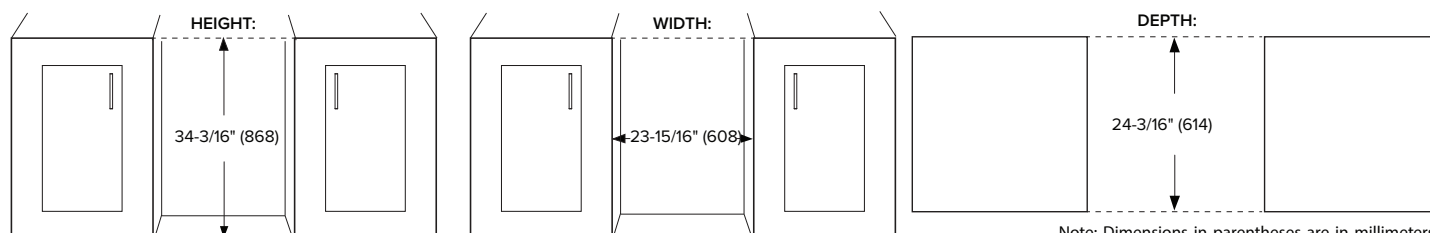

Note: Dimensions in parentheses are in millimeters. Specifications are subject to change without notice. Visit Avallon.com for the latest information.

PFW870SSVWW/SPVRS

GE Profile™ 5.3 cu. ft. Capacity Smart Front Load ENERGY STAR® Washer with UltraFresh™ Vent System+ with OdorBlock™

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)



ELECTRIC RATING	
120V	11.0A, 60HZ

INSTALLATION INFORMATION:

For complete information, see installation instructions packed with your washer.

INCLUDED:

- Power cord – up to 66" length
- Drain hose – up to 60" length

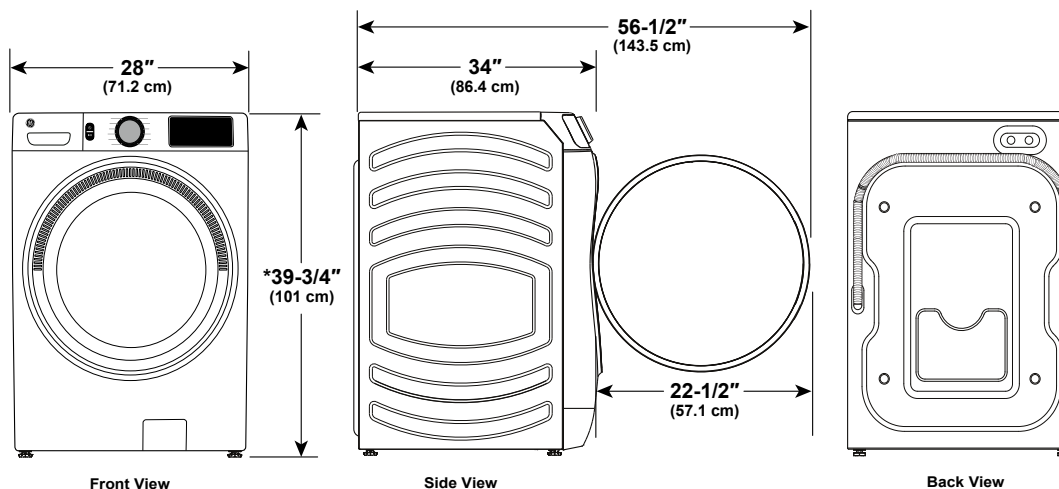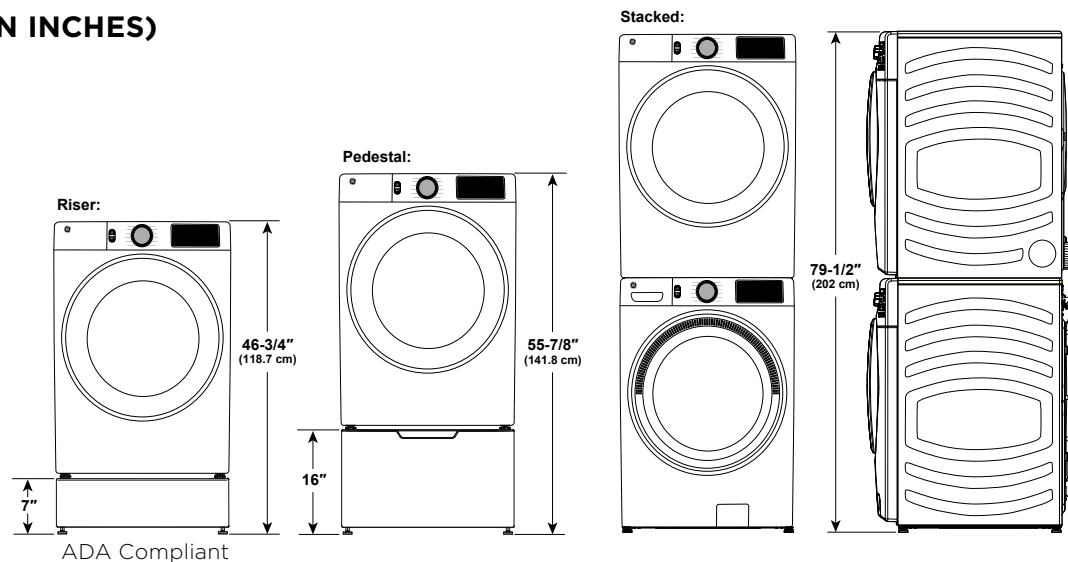

*With leveling legs retracted:
39-3/4" (101 cm).
With leveling legs fully extended:
40-5/8" (103.1 cm).



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/23

PFW870SSVWW/SPVRS

GE Profile™ 5.3 cu. ft. Capacity Smart Front Load ENERGY STAR® Washer with UltraFresh™ Vent System+ with OdorBlock™

SPECIAL INSTALLATION REQUIREMENTS:

STACKED INSTALLATION:

- Brackets for stacking dryer over washer are not included with the dryer. Order part no. GFA28KITN.

ALCOVE OR CLOSET INSTALLATION:

- Minimum clearances between washer cabinet and adjacent walls or other surfaces are: 0" all sides and top.*
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outside.

BATHROOM OR BEDROOM INSTALLATION: THE DRYER MUST BE EXHAUSTED TO THE OUTDOORS.

- The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Plumbing Code, ANSI Z223 for gas dryers.

**FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES,
PLEASE CALL 1-800-GE-CARES.**

*For improved performance, a 1/2" clearance is suggested on each side.


**Accessories sold separately.

WASHER ACCESSORIES**

GE Part Number	Description
WB64X5025	Touch-up Paint (White) 0.6 fl oz
WH97X30578	Touch-Up Paint (Royal Sapphire) - 0.6 fl oz
WH49X316	Drain Hose Extension
PM7X2	Universal Low-Profile Floor Tray (white)
WH41X10207	Fill Hose
WX17X10001CA	Vibration Pads
GFP1528SNWW	Pedestal Assembly (White)
GFP1528PNRS	Pedestal Assembly (Royal Sapphire)
GFR0728SNWW	Riser (White)
GFR0728PNRS	Riser (Royal Sapphire)
GFA28KITN	Stacking Kit
WX14X10011	6 ft stainless steel washer hoses with 90° elbows; 2-pack


WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance Limited 10-year motor

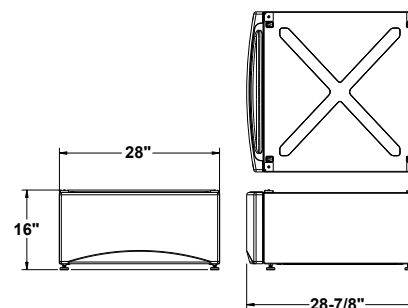

PEDESTAL DIMENSIONS (IN INCHES)

The optional 16" pedestal raises the door opening and height of the washer or dryer.

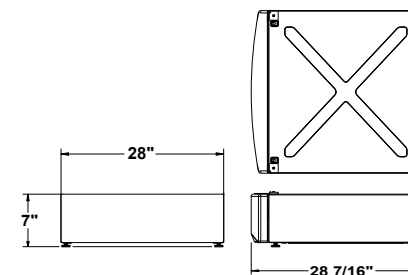

RISER DIMENSIONS (IN INCHES)

The optional 7" riser raises the door opening and height of the washer or dryer while remaining ADA compliant.



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/23

PFW870SSVWW/SPVRS

GE Profile™ 5.3 cu. ft. Capacity Smart Front Load ENERGY STAR® Washer with UltraFresh™ Vent System+ with OdorBlock™

FEATURES AND BENEFITS

UltraFresh™ Vent System+ with OdorBlock™ – The first and only UltraFresh™ Vent System+ is enhanced with a sensor that detects and eliminates excess moisture to help prevent odors, ensuring your washer stays fresh and clean.

Microban® Antimicrobial Technology – Built into components including the gasket, dispenser and draining system, delivering protection that lives on, load after load.

SmartDispense™ Technology – Save time and make laundry effortless with our intelligent dispenser that holds up to 32 loads of detergent and automatically dispenses the perfect amount, based on load weight and fabric type, for optimal cleaning performance.

Smart Features Powered by SmartHQ™ with Downloaded Cycles – When connected to the SmartHQ™ app, you can make sure your washer always has the latest features! Plus, receive remote cycle status notifications, enable remote capabilities and select from download specialty cycles.

Dynamic Balancing Technology (dBT™) – Our patented, time-saving technology senses and rebalances uneven loads during the spin cycle, providing a quiet wash.

Reversible Door – Easily reverse your washer and dryer doors for superior installation flexibility.

Steam Cycle – Safely penetrates deep into fabric fibers, loosening stains to deliver enhanced cleaning performance.

More Energy Efficient – Tier 2 Certified – This ENERGY STAR® certified clothes washer also meets CEE Tier 2 specifications. Save on utility costs and reduce your environmental impact with our eco-friendly design. Experience efficient washing without compromising performance.

Soak Rinse for Sanitizers – Reduces bacteria and viruses with a final 16-minute cold soaking rinse when using color-safe liquid sanitizers to boost your detergent's cleaning power and remove tough odors on even your most delicate laundry.

Sanitize + Allergen – Industry-first cycle sanitizes fabrics to kill 99% of common bacteria and allergens such as dust mites.



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/23

PFD87ESSVWW/ES(P/M)VRS

GE Profile™ 7.8 cu. ft. Capacity Smart Front Load Electric Dryer with Steam and Sanitize Cycle

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)



ELECTRIC DRYER RATING	
120V/240V	5600W, 25A, 60Hz
120V/208V	4300W, 23A, 60Hz

EXHAUST OPTIONS: 4-way via rear, left, right, and bottom. (The right, left, and bottom venting options require Side Vent Kit: GFA28DSVN)

CIRCUIT REQUIREMENTS: An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse, is required.

NOTE: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

INSTALLATION INFORMATION: For complete information, see installation instructions packed with your dryer.

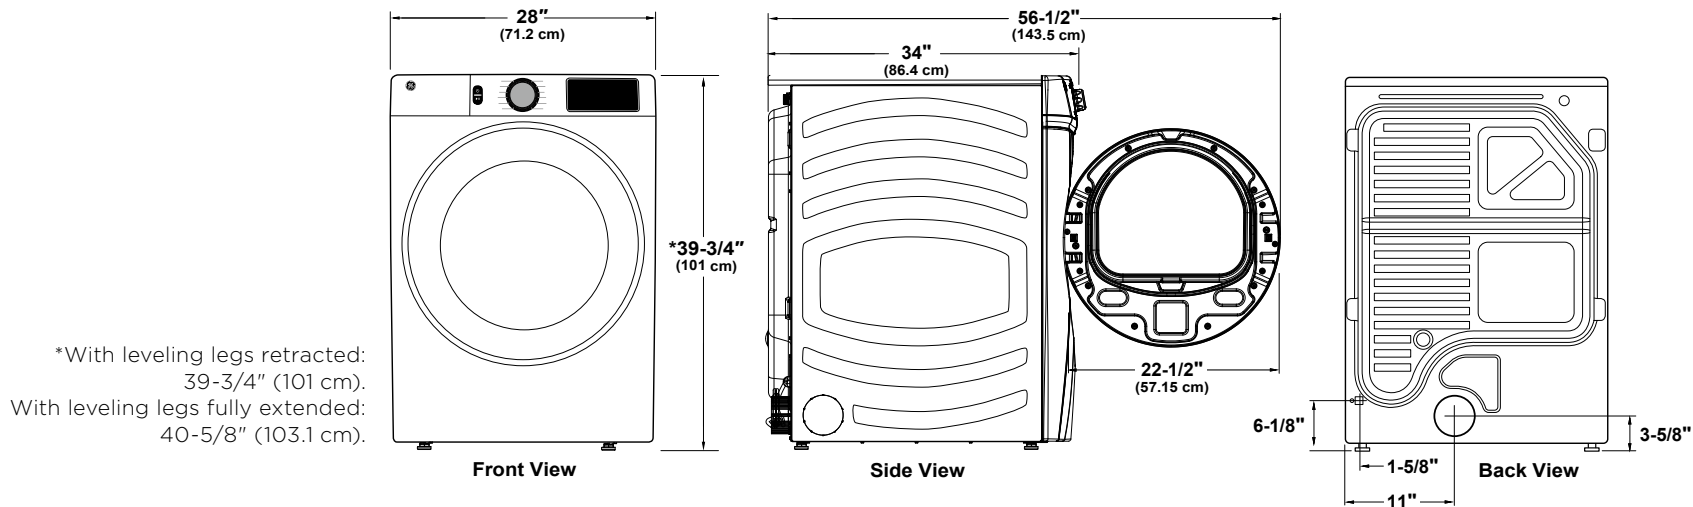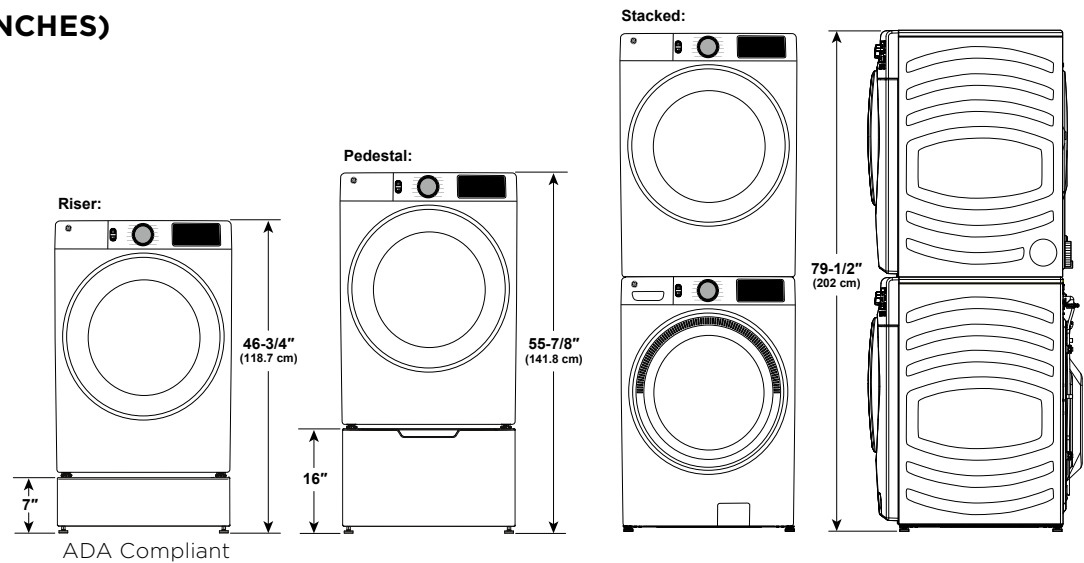

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/23

PFD87ESSVWW/ES(P/M)VRS

GE Profile™ 7.8 cu. ft. Capacity Smart Front Load Electric Dryer with Steam and Sanitize Cycle

SPECIAL INSTALLATION REQUIREMENTS:

STACKED INSTALLATION:

- Brackets for stacking dryer over washer are not included with the dryer. Order part no. GFA28KITN.

ALCOVE OR CLOSET INSTALLATION:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outside.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" all sides and top.*
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

BATHROOM OR BEDROOM INSTALLATION:

- The dryer MUST be exhausted to the outdoors.
- The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223 for gas dryers.

MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:

Minimum clearances to combustible surfaces 0" all sides and top.*

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.

*For improved performance, a 1/2" clearance is suggested on each side.


**Accessories sold separately.

DRYER ACCESSORIES**

GE Part Number	Description
WB64X5025	Touch-up Paint (White) .06 oz.
WH97X30578	Touch-Up Paint (Royal Sapphire) - 0.6 oz
WE02X29449	Dryer Rack Assembly
GFA28DSVN	Side Vent Kit
WE25X20060	Steam Kit
WX17X10001CA	Vibration Pads
GFP1528SNWW	Pedestal Assembly (White)
GFP1528PNRS	Pedestal Assembly (Royal Sapphire)
GFR0728SNWW	Riser (White)
GFR0728PNRS	Riser (Royal Sapphire)
GFA28KITN	Stacking Kit


WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance Limited 10-year motor

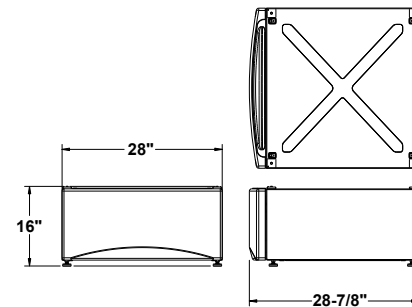

PEDESTAL DIMENSIONS (IN INCHES)

The optional 16" pedestal raises the door opening and height of the washer or dryer.

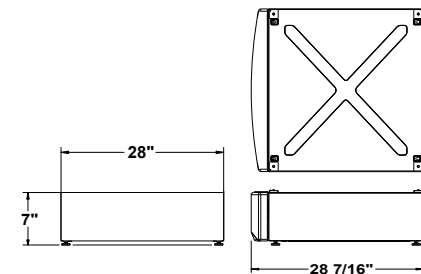

RISER DIMENSIONS (IN INCHES)

The optional 7" riser raises the door opening and height of the washer or dryer while remaining ADA compliant.



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/23

PFD87ESSVWW/ES(P/M)VRS

GE Profile™ 7.8 cu. ft. Capacity Smart Front Load Electric Dryer with Steam and Sanitize Cycle

DRYER EXHAUSTING INFORMATION - METAL DUCT ONLY

For complete information, see installation instructions packed with your dryer.

DUCTING MATERIALS: For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semi-rigid) ducting can be used (Kit PM08X10084 or PM08X10085). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used **ONLY** in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instructions packed with your dryer for complete instructions when using flexible metal (foil type) ducting.

EXHAUST LENGTH CALCULATION:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table.

A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow.


A turn over 45° should be treated as a 90° elbow.

Dryers must be exhausted to the outside.


CAUTION: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.



Best performance			
Maximum length of 4" dia. rigid metal duct			
Exhaust hood type			
Domestic dryer models	Number of 90° turns	A 4" opening	B 2-1/2" opening
		0	90 ft.
		1	60 ft.
		2	45 ft.
		3	35 ft.
		4	25 ft.

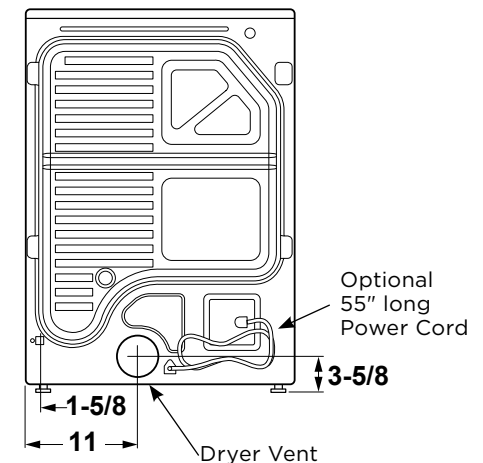

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/23

PFD87ESSVWW/ES(P/M)VRS

GE Profile™ 7.8 cu. ft. Capacity Smart Front Load Electric Dryer with Steam and Sanitize Cycle

FEATURES AND BENEFITS

Steam Cycle – Refresh small loads and dewrinkle larger loads with the power of steam.

Washer Link – Wirelessly links your washer to your dryer so you only choose a setting once.

Built-in WiFi – Start, stop and monitor your laundry from anywhere while receiving real-time notifications and updates.

Steam Sanitize – Sterilize clothing with elevated temperatures designed to kill common household germs and bacteria, while using steam technology to reduce wrinkles and odors.

Quick Dry – Quickly dries items and small loads for families on the go.

Reduce Static – Prevent static cling with a gentle mist near the end of the cycle.

Wrinkle Care – Prevents wrinkles by extending the tumble without heat.

Damp Alert – Signals when delicate clothes reach the ideal dampness level for ironing or final air drying.

Convenient 4-Way Venting – Flexible venting options allow venting from the front, rear or either side with Kit GFA28DSVN.

Reversible Door – Easily reverse your washer and dryer doors for superior installation flexibility.

Check Vent Notification – Receive a notification when the dryer vent needs to be cleaned, ensuring safe operation and optimal drying performance.



4-way Venting Option



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/23