

McNeil Company Schachne Residence

Quote #: PU8XEYH

A Proposal for Window and Door Products prepared for:

Job Site:
68137

Shipping Address:

THE WINDOW & DOOR STORE-OMAHA
1324 PIERCE ST
OMAHA, NE 68108-3123

Featuring products from:



RANDY FLEISSNER
THE WINDOW & DOOR STORE-OMAHA
13819 INDUSTRIAL RD
OMAHA, NE 68137-1117
Phone: (402) 333-4321

Email: randy@marvinwindowstore.com

This report was generated on 1/10/2025 2:32:55 PM using the Marvin Order Management System, version 0004.13.00 (Current). Price in USD. Unit availability and price are subject to change. Dealer terms and conditions may apply.

UNIT SUMMARY

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes.

Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

NUMBER OF LINES: 25

TOTAL UNIT QTY: 25


EXT NET PRICE: USD 49,017.46

LINE	MARK UNIT	PRODUCT LINE	ITEM	NET PRICE	QTY	EXTENDED NET PRICE
1	Fitness/BedRm4	Ultimate	Marvin Assembly RO 57" X 59 5/8"	1,676.52	1	1,676.52
2	BedRm3	Ultimate	Marvin Assembly RO 57" X 59 5/8"	1,676.52	1	1,676.52
3	FamilyRm	Ultimate	Marvin Assembly RO 57" X 59 5/8"	1,676.52	1	1,676.52
4	MasterBedRm	Ultimate	Marvin Assembly RO 73" X 71 5/8"	2,175.95	1	2,175.95
5	MaserBedRm	Ultimate	Casement RO 29" X 59 5/8"	841.48	1	841.48
6	MaserBedRm	Ultimate	Casement RO 29" X 59 5/8"	841.48	1	841.48
7	GreatRm	Ultimate	Marvin Assembly RO 133 3/4" X 82 3/4"	5,834.52	1	5,834.52
8	DiningRm	Ultimate	Marvin Assembly RO 105 3/4" X 82 3/4"	4,727.59	1	4,727.59
9	DiningRm	Ultimate	Marvin Assembly RO 105 3/4" X 82 3/4"	4,727.59	1	4,727.59
10	DiningRm	Ultimate	Sliding French Door 2 1/4 Inch G2 RO 97 5/8" X 110 1/2"	8,611.53	1	8,611.53
11	Kitchen	Ultimate	Marvin Assembly RO 73" X 53 5/8"	1,779.55	1	1,779.55
12	3CarGarage	Ultimate	Marvin Assembly RO 81" X 17 5/8"	1,010.34	1	1,010.34
13	3CarGarage	Ultimate	Marvin Assembly RO 27" X 70 3/4"	1,054.00	1	1,054.00
14	Service Entry	Ultimate	Marvin Assembly RO 27" X 70 3/4"	1,054.00	1	1,054.00
15	Service Entry	Ultimate	Marvin Assembly RO 27" X 70 3/4"	1,167.05	1	1,167.05
16	Service Entry	Ultimate	Marvin Assembly RO 27" X 70 3/4"	1,054.00	1	1,054.00
17	Foyer	Ultimate	Awning Picture RO 41" X 17 5/8"	493.72	1	493.72
18	Foyer	Ultimate	Casement RO 25" X 17 5/8"	384.25	1	384.25
19	Den	Ultimate	Marvin Assembly RO 65" X 82 3/4"	2,644.63	1	2,644.63
20	MasterWardrobe	Ultimate	Casement RO 31" X 17 5/8"	416.44	1	416.44
21	MasterWardrobe	Ultimate	Casement RO 41" X 17 5/8"	493.72	1	493.72
22	MasterWardrobe	Ultimate	Casement RO 31" X 17 5/8"	416.44	1	416.44
23	MasterWardrobe	Ultimate	Casement RO 41" X 17 5/8"	493.72	1	493.72
24	MasterBathRm	Ultimate	Marvin Assembly RO 61" X 59 5/8"	2,326.22	1	2,326.22
25	MasterBathRm	Ultimate	Marvin Assembly RO 109" X 17 5/8"	1,439.68	1	1,439.68

LINE ITEM QUOTES

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes. Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

Line #1	Mark Unit: Fitness/BedRm4	Net Price:		1,676.52
Qty: 1		Ext. Net Price:	USD	1,676.52

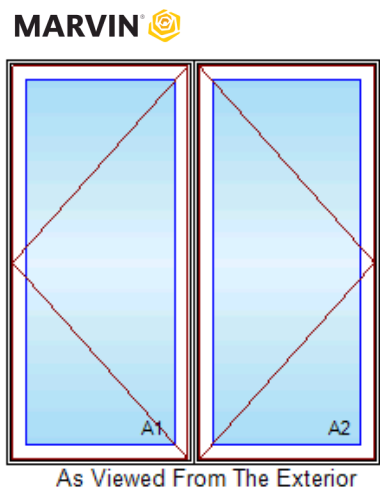

FS 56" X 59 1/8"
RO 57" X 59 5/8"
Egress Information A1, A2
Width: 20 57/64" Height: 54 1/64"
Net Clear Opening: 7.84 SqFt
Performance Information A1, A2
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1, A2
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #917
AAMA 450-10
LC-PG50 1524X2111 mm (60X83.2 in)
Water Resistance: 7.5 psf
LC-PG50 DP 50
FL13150
Performance Grade Overall Assembly
Water Resistance: 7.52 psf
LC-PG50 DP

Gunmetal Clad Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
57" X 59 5/8"

Unit: A1777.08
Ultimate Casement - Left Hand
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2777.08
Ultimate Casement - Right Hand
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose


Standard Mull Charge37.21
6 9/16" Jambes 85.15
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.
***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____

Buyer: _____

Line #2	Mark Unit: BedRm3	Net Price:		1,676.52
Qty: 1		Ext. Net Price:	USD	1,676.52

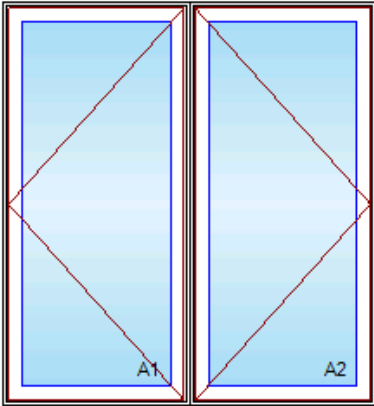

As Viewed From The Exterior

FS 56" X 59 1/8"
RO 57" X 59 5/8"
Egress Information A1, A2
Width: 20 57/64" Height: 54 1/64"
Net Clear Opening: 7.84 SqFt
Performance Information A1, A2
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1, A2
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #917
AAMA 450-10
LC-PG50 1524X2111 mm (60X83.2 in)
Water Resistance: 7.5 psf
LC-PG50 DP 50
FL13150
Performance Grade Overall Assembly
Water Resistance: 7.52 psf
LC-PG50 DP

Gunmetal Clad Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
57" X 59 5/8"

Unit: A1777.08
Ultimate Casement - Left Hand
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2777.08
Ultimate Casement - Right Hand
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose


Standard Mull Charge37.21
6 9/16" Jamb85.15
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.

***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____
Buyer: _____

Line #3	Mark Unit: FamilyRm	Net Price:		1,676.52
Qty: 1		Ext. Net Price:	USD	1,676.52

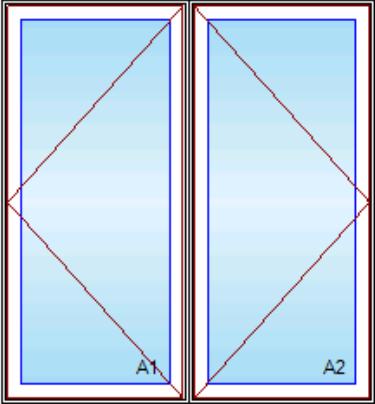

As Viewed From The Exterior

FS 56" X 59 1/8"
RO 57" X 59 5/8"
Egress Information A1, A2
Width: 20 57/64" Height: 54 1/64"
Net Clear Opening: 7.84 SqFt
Performance Information A1, A2
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1, A2
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #917
AAMA 450-10
LC-PG50 1524X2111 mm (60X83.2 in)
Water Resistance: 7.5 psf
LC-PG50 DP 50
FL13150
Performance Grade Overall Assembly
Water Resistance: 7.52 psf
LC-PG50 DP

Gunmetal Clad Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
57" X 59 5/8"

Unit: A1777.08
Ultimate Casement - Left Hand
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2777.08
Ultimate Casement - Right Hand
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Standard Mull Charge37.21
6 9/16" Jamb85.15
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.


***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____
Buyer: _____

Line #4	Mark Unit: MasterBedRm	Net Price:		2,175.95
Qty: 1		Ext. Net Price:	USD	2,175.95

MARVIN 

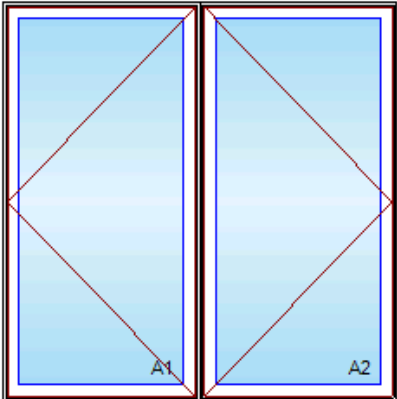

As Viewed From The Exterior

FS 72" X 71 1/8"
RO 73" X 71 5/8"
Egress Information A1, A2
Width: 28 57/64" Height: 66 1/64"
Net Clear Opening: 13.24 SqFt
Performance Information A1, A2
U-Factor: 0.29
Solar Heat Gain Coefficient: 0.28
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40125-00009
Performance Information OA
Performance Grade A1, A2
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #917
AAMA 450-10
LC-PG50 1524X2111 mm (60X83.2 in)
Water Resistance: 7.5 psf
LC-PG50 DP 50
FL13150
Performance Grade Overall Assembly
Water Resistance: 7.52 psf
LC-PG50 DP

Gunmetal Clad Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
73" X 71 5/8"

Unit: A1 1,016.78
Ultimate Casement - Left Hand
CN 3672
Rough Opening 37" X 71 5/8"
Frame Size 36" X 71 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2 1,016.78
Ultimate Casement - Right Hand
CN 3672
Rough Opening 37" X 71 5/8"
Frame Size 36" X 71 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Standard Mull Charge 37.21
6 9/16" Jamb 105.18
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.


***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____

Buyer: _____

Line #5	Mark Unit: MaserBedRm	Net Price:		841.48
Qty: 1		Ext. Net Price:	USD	841.48

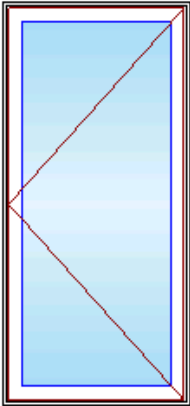

As Viewed From The Exterior

FS 28" X 59 1/8"
RO 29" X 59 5/8"
Egress Information
Width: 20 57/64" Height: 54 1/64"
Net Clear Opening: 7.84 SqFt
Performance Information
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Grade
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335

Gunmetal Clad Exterior
Bare Pine Interior
Ultimate Casement - Left Hand 777.08
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose
6 9/16" Jambs 64.40
Nailing Fin

***Note: Unit Availability and Price is Subject to Change

Initials required


Seller: _____

Buyer: _____

Line #6	Mark Unit: MaserBedRm	Net Price:		841.48
Qty: 1		Ext. Net Price:	USD	841.48



Gunmetal Clad Exterior
Bare Pine Interior
Ultimate Casement - Right Hand 777.08
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle

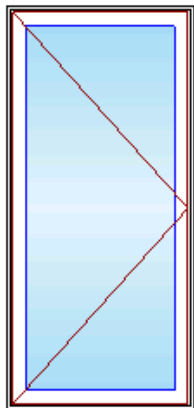

As Viewed From The Exterior

FS 28" X 59 1/8"
RO 29" X 59 5/8"
Egress Information
Width: 20 57/64" Height: 54 1/64"
Net Clear Opening: 7.84 SqFt
Performance Information
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Grade
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335

***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose
6 9/16" Jamb's 64.40
Nailing Fin
***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____

Buyer: _____

Line #7	Mark Unit: GreatRm	Net Price:		5,834.52
Qty: 1		Ext. Net Price:	USD	5,834.52

MARVIN 



As Viewed From The Exterior

FS 132 3/4" X 82 1/4"
RO 133 3/4" X 82 3/4"
Egress Information A1, A2, A3, B1, B2, B3
No Egress Information available.
Performance Information A1, A3
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information A2
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.57
Condensation Resistance: 58
CPD Number: MAR-N-344-27688-00009

Gunmetal Clad Exterior
Bare Pine Interior
3W2H - Rectangle Assembly
Assembly Rough Opening
133 3/4" X 82 3/4"
Prep for Field Mull Assembly 445.07
Mull Kit(s) Included
Sub Assembly 1 - 1W2H
Basic Frame 36" x 82 1/4"
Unit Locations: A1,B1
Sub Assembly 2 - 2W2H
Basic Frame 96 3/8" x 82 1/4"
Unit Locations: A2,A3,B2,B3

Unit: A1 757.04
Ultimate Casement - Stationary
CN 3660
Rough Opening 37" X 59 5/8"
Frame Size 36" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Performance Information B1, B3

U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 57
CPD Number: MAR-N-343-21498-00001

Performance Information B2

U-Factor: 0.28
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.57
Condensation Resistance: 57
CPD Number: MAR-N-344-27701-00001

Performance Information OA

Performance Grade A1

Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335

Performance Grade A2

Licensee #1016
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1524X2515 mm (60X99 in)
Water Resistance: 7.52 psf
CW-PG50 DP +50/-50
FL31335

Performance Grade A3

Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335

Performance Grade B1

Licensee #921
AAMA/WDMA/CSA/101/I.S.2/A440-11
LC-PG50 1016X1197 mm (40X47.13 in)
Water Resistance: 7.5 psf
LC-PG50 DP +50/-50
FL10323

Performance Grade B2

Licensee #917
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1626X2642 mm (64X104 in)
Water Resistance: 7.5 psf
Deflection at Certified Size and Performance: 0.99
CW-PG50 DP +50/-50
FL31335

Performance Grade B3

Licensee #921
AAMA/WDMA/CSA/101/I.S.2/A440-11
LC-PG50 1016X1197 mm (40X47.13 in)
Water Resistance: 7.5 psf
LC-PG50 DP +50/-50
FL10323

Performance Grade Mull

Licensee #917
AAMA 450-10
LC-PG50 1534X2438 mm (60.37X96 in)
Water Resistance: 7.52 psf
LC-PG50 DP 50

Performance Grade Overall Assembly

LC-PG50 DP

Unit: A2, 1,169.19

Ultimate Casement Picture
CN 6060
Rough Opening 61" X 59 5/8"
Frame Size 60" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: A3, 757.04

Ultimate Casement - Stationary
CN 3660
Rough Opening 37" X 59 5/8"
Frame Size 36" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B1, 618.23

Ultimate Awning - Roto Operating
CN 3624
Rough Opening 37" X 23 5/8"
Frame Size 36" X 23 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: B2, 619.66

Ultimate Awning Picture
CN 6024
Rough Opening 61" X 23 5/8"
Frame Size 60" X 23 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B3, 618.23

Ultimate Awning - Roto Operating
CN 3624
Rough Opening 37" X 23 5/8"
Frame Size 36" X 23 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose
Vertical Mull Reinforcement 3/8"506.60
Mull 1 - Prep for Vertical Mull Reinforcement 3/8" - 82 1/4" Long
Standard Mull Charge186.04
6 9/16" Jambs157.42
***Jamb Extension Ship Loose
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20
through either physical testing or calculations in accordance with AAMA 450 and
building code requirements. Mull certification ratings may vary from individual
unit certification ratings. Reference the mulling chapter of the ADM for
additional information.
***Note: Unit Availability and Price is Subject to Change


Initials required

Seller: _____

Buyer: _____

Line #8	Mark Unit: DiningRm	Net Price:		4,727.59
Qty: 1		Ext. Net Price:	USD	4,727.59

MARVIN®

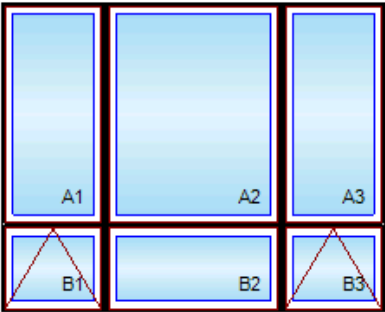

As Viewed From The Exterior

FS 104 3/4" X 82 1/4"
RO 105 3/4" X 82 3/4"
Egress Information A1, A2, A3, B1, B2, B3
No Egress Information available.
Performance Information A1, A3
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001

Gunmetal Clad Exterior
Bare Pine Interior
3W2H - Rectangle Assembly
Assembly Rough Opening
105 3/4" X 82 3/4"

Unit: A1,661.88
Ultimate Casement - Stationary
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: A2,890.85
Ultimate Casement Picture
CN 4860
Rough Opening 49" X 59 5/8"

Performance Information A2

U-Factor: 0.27
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.57
Condensation Resistance: 58
CPD Number: MAR-N-344-27688-00009

Performance Information B1, B3

U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 57
CPD Number: MAR-N-343-21498-00001

Performance Information B2

U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 57
CPD Number: MAR-N-343-21498-00001

Performance Information OA

Performance Grade A1, A3

Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335

Performance Grade A2

Licensee #1016
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1524X2515 mm (60X99 in)
Water Resistance: 7.52 psf
CW-PG50 DP +50/-50
FL31335

Performance Grade B1, B3

Licensee #921
AAMA/WDMA/CSA/101/I.S.2/A440-11
LC-PG50 1016X1197 mm (40X47.13 in)
Water Resistance: 7.5 psf
LC-PG50 DP +50/-50
FL10323

Performance Grade B2

Licensee #921
AAMA/WDMA/CSA/101/I.S.2/A440-11
LC-PG50 1219X1197 mm (48X47.13 in)
Water Resistance: 7.5 psf
LC-PG50 DP +50/-50
FL10323

Performance Grade Mull

Licensee #917
AAMA 450-10
LC-PG50 1534X2438 mm (60.37X96 in)
Water Resistance: 7.5 psf
LC-PG50 DP 50

Performance Grade Overall Assembly

LC-PG50 DP

Frame Size 48" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: A3 661.88

Ultimate Casement - Stationary
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B1 576.73

Ultimate Awning - Roto Operating
CN 2824
Rough Opening 29" X 23 5/8"
Frame Size 28" X 23 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: B2 529.50

Ultimate Awning - Stationary
CN 4824
Rough Opening 49" X 23 5/8"
Frame Size 48" X 23 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B3 576.73

Ultimate Awning - Roto Operating
CN 2824
Rough Opening 29" X 23 5/8"
Frame Size 28" X 23 1/8"
Gunmetal Clad Sash Exterior


Bare Pine Sash Interior	
IG - 3/4" - 1 Lite	
Low E2 w/Argon	
Black Perimeter Bar	
Putty Exterior Glazing Profile	
Ogee Interior Glazing Profile	
Standard Bottom Rail	
Black Weather Strip	
Satin Taupe Folding Handle	
***Handles/Covers Ship Loose	
Satin Taupe Multi - Point Lock	
Aluminum Screen	
Satin Taupe Surround	
Bright View Mesh	
***Screen/Combo Ship Loose	
Vertical Mull Reinforcement 3/8"	506.60
Standard Mull Charge	186.04
6 9/16" Jambs	137.38
Nailing Fin	
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.	
***Note: Unit Availability and Price is Subject to Change	

Initials required

Seller: _____

Buyer: _____

Line #9	Mark Unit: DiningRm	Net Price:	4,727.59
Qty: 1		Ext. Net Price:	4,727.59
		USD	

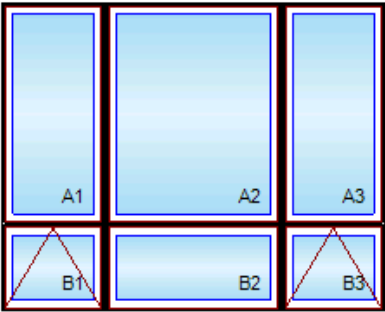

As Viewed From The Exterior

FS 104 3/4" X 82 1/4"
RO 105 3/4" X 82 3/4"
Egress Information A1, A2, A3, B1, B2, B3
No Egress Information available.
Performance Information A1, A3
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information A2
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.57
Condensation Resistance: 58
CPD Number: MAR-N-344-27688-00009
Performance Information B1, B3

Gunmetal Clad Exterior	
Bare Pine Interior	
3W2H - Rectangle Assembly	
Assembly Rough Opening	
105 3/4" X 82 3/4"	
Unit: A1	661.88
Ultimate Casement - Stationary	
CN 2860	
Rough Opening 29" X 59 5/8"	
Frame Size 28" X 59 1/8"	
Gunmetal Clad Sash Exterior	
Bare Pine Sash Interior	
IG - 3/4" - 1 Lite	
Low E2 w/Argon	
Black Perimeter Bar	
Putty Exterior Glazing Profile	
Ogee Interior Glazing Profile	
Standard Bottom Rail	
Black Weather Strip	
Solid Wood Covers	
Unit: A2	890.85
Ultimate Casement Picture	
CN 4860	
Rough Opening 49" X 59 5/8"	
Frame Size 48" X 59 1/8"	
Gunmetal Clad Sash Exterior	
Bare Pine Sash Interior	
IG - 3/4" - 1 Lite	
Low E2 w/Argon	
Black Perimeter Bar	
Putty Exterior Glazing Profile	

U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 57
CPD Number: MAR-N-343-21498-00001

Performance Information B2

U-Factor: 0.28
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.57
Condensation Resistance: 57
CPD Number: MAR-N-344-27701-00001

Performance Information OA

Performance Grade A1, A3

Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335

Performance Grade A2

Licensee #1016
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1524X2515 mm (60X99 in)
Water Resistance: 7.52 psf
CW-PG50 DP +50/-50
FL31335

Performance Grade B1, B3

Licensee #921
AAMA/WDMA/CSA/101/I.S.2/A440-11
LC-PG50 1016X1197 mm (40X47.13 in)
Water Resistance: 7.5 psf
LC-PG50 DP +50/-50
FL10323

Performance Grade B2

Licensee #917
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1626X2642 mm (64X104 in)
Water Resistance: 7.5 psf
Deflection at Certified Size and Performance: 0.99
CW-PG50 DP +50/-50
FL31335

Performance Grade Mull

Licensee #917
AAMA 450-10
LC-PG50 1534X2438 mm (60.37X96 in)
Water Resistance: 7.5 psf
LC-PG50 DP 50

Performance Grade Overall Assembly

LC-PG50 DP

Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: A3 661.88

Ultimate Casement - Stationary
CN 2860
Rough Opening 29" X 59 5/8"
Frame Size 28" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B1 576.73

Ultimate Awning - Roto Operating
CN 2824
Rough Opening 29" X 23 5/8"
Frame Size 28" X 23 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: B2 529.50

Ultimate Awning Picture
CN 4824
Rough Opening 49" X 23 5/8"
Frame Size 48" X 23 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B3 576.73

Ultimate Awning - Roto Operating
CN 2824
Rough Opening 29" X 23 5/8"
Frame Size 28" X 23 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail

Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose
Vertical Mull Reinforcement 3/8" 506.60
Standard Mull Charge 186.04
6 9/16" Jamb 137.38
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20
through either physical testing or calculations in accordance with AAMA 450 and
building code requirements. Mull certification ratings may vary from individual
unit certification ratings. Reference the mulling chapter of the ADM for
additional information.
***Note: Unit Availability and Price is Subject to Change


Initials required

Seller: _____

Buyer: _____

Line #10	Mark Unit: DiningRm	Net Price:		8,611.53
Qty: 1		Ext. Net Price:	USD	8,611.53

MARVIN 

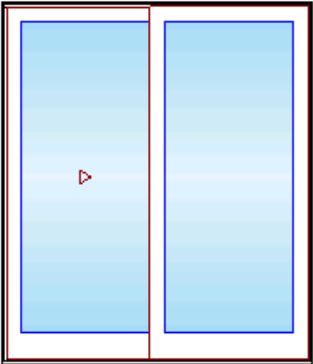

As Viewed From The Exterior

FS 96 5/8" X 110"
RO 97 5/8" X 110 1/2"
Egress Information
Width: 41 5/8" Height: 106 3/8"
Net Clear Opening: 30.75 SqFt

Performance Information
Product Performance Information is currently
unavailable in the OMS for this product and
glazing option. To request product performance
information not in the OMS, contact your Marvin
representative or submit an Assistance Request.
Performance Grade
No Performance Grade Information available.

Gunmetal Clad Exterior
Bare Pine Interior
Ultimate Sliding French Door 2 1/4 Inch G2 6 9/16" - XO 7,944.65
CN 8090
Rough Opening 97 5/8" X 110 1/2"
**Operator Panels Ship Separate
Left Panel
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 1 Lite
Tempered Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 1 Lite
Tempered Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Harp G2 Handle(s)
Harp G2 Interior Handle(s)
2 Point Multi-Point Lock on Active Panel
Matte Black Active Exterior Handle Set on Active Panel Keyed 62.25
Matte Black Active Interior Handle Set on Active Panel 51.52
Keyed
Exterior Ultimate Sliding Screen G2 553.11
Gunmetal Surround
Bright View Mesh
***Screen/Combo Ship Loose
Ebony Performance Sill
Black Weather Strip
6 9/16" Jamb
Thru Jamb Installation w/ Nailing Fin
***Note: The selected Interior Finish would allow Finger Joints to appear on
secondary surfaces.

***Note: Unit Availability and Price is Subject to Change


Initials required

Seller: _____

Buyer: _____

Line #11	Mark Unit: Kitchen	Net Price:	1,779.55
Qty: 1		Ext. Net Price: USD	1,779.55

MARVIN 

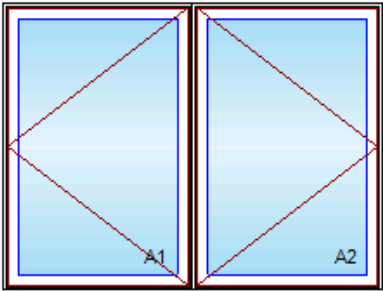

As Viewed From The Exterior

FS 72" X 53 1/8"
RO 73" X 53 5/8"
Egress Information A1, A2
Width: 28 57/64" Height: 48 1/64"
Net Clear Opening: 9.63 SqFt
Performance Information A1, A2
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1, A2
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #917
AAMA 450-10
LC-PG50 1524X2111 mm (60X83.2 in)
Water Resistance: 7.5 psf
LC-PG50 DP 50
FL13150
Performance Grade Overall Assembly
Water Resistance: 7.52 psf
LC-PG50 DP

Gunmetal Clad Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
73" X 53 5/8"

Unit: A1 825.02
Ultimate Casement - Left Hand
CN 3654
Rough Opening 37" X 53 5/8"
Frame Size 36" X 53 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2 825.02
Ultimate Casement - Right Hand
CN 3654
Rough Opening 37" X 53 5/8"
Frame Size 36" X 53 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose
Standard Mull Charge 37.21
6 9/16" Jambes 92.30
Nailing Fin

***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.


***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____

Buyer: _____

Line #12	Mark Unit: 3CarGarage	Net Price:		1,010.34
Qty: 1		Ext. Net Price:	USD	1,010.34



FS 80" X 17 1/8"
RO 81" X 17 5/8"
Egress Information A1, A2
No Egress Information available.
Performance Information A1, A2
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.57
Condensation Resistance: 57
CPD Number: MAR-N-344-27701-00001
Performance Information OA
Performance Grade A1, A2
Licensee #917
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1626X2642 mm (64X104 in)
Water Resistance: 7.5 psf
Deflection at Certified Size and Performance: 0.99
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #1137
AAMA 450-10
LC-PG70 1197X1219 mm (47.13X48 in)
Water Resistance: 7.5 psf
Deflection at Certified Size and Performance: 0.99
LC-PG70 DP 70
FL17797
Performance Grade Overall Assembly
Water Resistance: 7.5 psf
Deflection at Certified Size and Performance: 0.99
CW-PG50 DP +50/-50

Gunmetal Clad Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
81" X 17 5/8"

Unit: A1450.79
Ultimate Awning Picture
CN 4018
Rough Opening 41" X 17 5/8"
Frame Size 40" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: A2450.79
Ultimate Awning Picture
CN 4018
Rough Opening 41" X 17 5/8"
Frame Size 40" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers
Standard Mull Charge37.21
6 9/16" Jamb's 71.55
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.
***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____

Buyer: _____

Line #13	Mark Unit: 3CarGarage	Net Price:		1,054.00
----------	-----------------------	------------	--	----------

Qty: 1		Ext. Net Price:	USD	1,054.00
--------	--	-----------------	-----	----------

A1

B1

As Viewed From The Exterior

FS 26" X 70 1/4"
RO 27" X 70 3/4"
Egress Information A1, B1
No Egress Information available.
Performance Information A1
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information B1
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1, B1
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #1137
AAMA 450-10
LC-PG70 1197X1219 mm (47.13X48 in)
Water Resistance: 7.5 psf
LC-PG70 DP 70
FL17797
Performance Grade Overall Assembly
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50

Gunmetal Clad Exterior
Bare Pine Interior
1W2H - Rectangle Assembly
Assembly Rough Opening
27" X 70 3/4"

Unit: A1 353.48
Ultimate Casement - Stationary
CN 2618
Rough Opening 27" X 17 5/8"
Frame Size 26" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B1 592.47
Ultimate Casement - Stationary
CN 2654
Rough Opening 27" X 53 5/8"
Frame Size 26" X 53 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Standard Mull Charge 37.21
6 9/16" Jambos 70.84
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.
***Note: Unit Availability and Price is Subject to Change

Initials required


Seller: _____

Buyer: _____

Line #14	Mark Unit: Service Entry	Net Price:		1,054.00
Qty: 1		Ext. Net Price:	USD	1,054.00

Gunmetal Clad Exterior
Bare Pine Interior
1W2H - Rectangle Assembly
Assembly Rough Opening
27" X 70 3/4"

Unit: A1 353.48
Ultimate Casement - Stationary

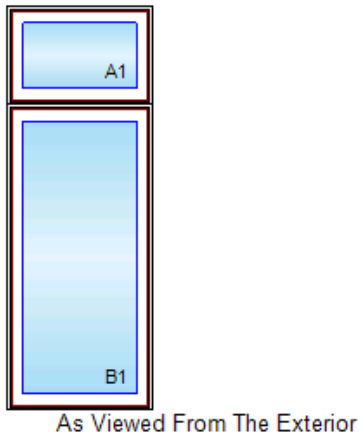

FS 26" X 70 1/4"
RO 27" X 70 3/4"
Egress Information A1, B1
No Egress Information available.
Performance Information A1
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information B1
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1, B1
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #1137
AAMA 450-10
LC-PG70 1197X1219 mm (47.13X48 in)
Water Resistance: 7.5 psf
LC-PG70 DP 70
FL17797
Performance Grade Overall Assembly
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50

CN 2618
Rough Opening 27" X 17 5/8"
Frame Size 26" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B1592.47
Ultimate Casement - Stationary
CN 2654
Rough Opening 27" X 53 5/8"
Frame Size 26" X 53 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers
Standard Mull Charge37.21
6 9/16" Jambos 70.84
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.

***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____


Buyer: _____

Line #15	Mark Unit: Service Entry	Net Price:		1,167.05
Qty: 1		Ext. Net Price:	USD	1,167.05

MARVIN

Gunmetal Clad Exterior
Bare Pine Interior
1W2H - Rectangle Assembly
Assembly Rough Opening
27" X 70 3/4"

Unit: A1353.48
Ultimate Casement - Stationary
CN 2618
Rough Opening 27" X 17 5/8"
Frame Size 26" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior



As Viewed From The Exterior

FS 26" X 70 1/4"
RO 27" X 70 3/4"
Egress Information A1
No Egress Information available.
Egress Information B1
Width: 18 57/64" Height: 48 1/64"
Net Clear Opening: 6.30 SqFt
Performance Information A1
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information B1
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade B1
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #1137
AAMA 450-10
LC-PG70 1197X1219 mm (47.13X48 in)
Water Resistance: 7.5 psf
LC-PG70 DP 70
FL17797
Performance Grade Overall Assembly
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50

IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B1 705.52
Ultimate Casement - Right Hand
CN 2654
Rough Opening 27" X 53 5/8"
Frame Size 26" X 53 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose
Standard Mull Charge 37.21
6 9/16" Jambs 70.84
Nailing Fin

***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.

***Note: Unit Availability and Price is Subject to Change

Initials required


Seller: _____

Buyer: _____

Line #16	Mark Unit: Service Entry	Net Price:	1,054.00
Qty: 1		Ext. Net Price:	1,054.00
		USD	



Gunmetal Clad Exterior
Bare Pine Interior
1W2H - Rectangle Assembly

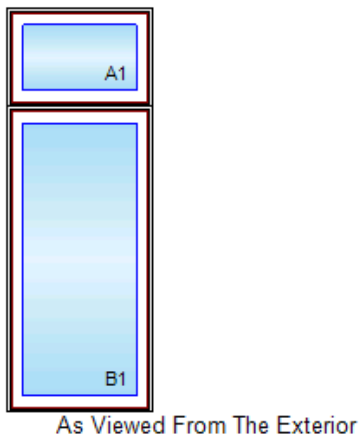

FS 26" X 70 1/4"
RO 27" X 70 3/4"
Egress Information A1, B1
No Egress Information available.
Performance Information A1
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information B1
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1, B1
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #1137
AAMA 450-10
LC-PG70 1197X1219 mm (47.13X48 in)
Water Resistance: 7.5 psf
LC-PG70 DP 70
FL17797
Performance Grade Overall Assembly
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50

Assembly Rough Opening
27" X 70 3/4"

Unit: A1 353.48
Ultimate Casement - Stationary
CN 2618
Rough Opening 27" X 17 5/8"
Frame Size 26" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: B1 592.47
Ultimate Casement - Stationary
CN 2654
Rough Opening 27" X 53 5/8"
Frame Size 26" X 53 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Standard Mull Charge 37.21
6 9/16" Jambes 70.84
Nailing Fin

***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.


***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____

Buyer: _____

Line #17	Mark Unit: Foyer	Net Price:		493.72
Qty: 1		Ext. Net Price:	USD	493.72

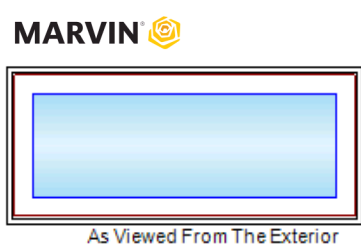

FS 40" X 17 1/8"
RO 41" X 17 5/8"
Egress Information

Gunmetal Clad Exterior
Bare Pine Interior
Ultimate Awning Picture 450.79
CN 4018
Rough Opening 41" X 17 5/8"
Frame Size 40" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile


No Egress Information available.
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.57
Condensation Resistance: 57
CPD Number: MAR-N-344-27701-00001
Performance Grade
Licensee #917
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1626X2642 mm (64X104 in)
Water Resistance: 7.5 psf
Deflection at Certified Size and Performance: 0.99
CW-PG50 DP +50/-50
FL31335

Standard Bottom Rail
Black Weather Strip
Solid Wood Covers
6 9/16" Jambs 42.93
Nailing Fin
*****Note: Unit Availability and Price is Subject to Change**

Initials required
Seller: _____
Buyer: _____

Line #18	Mark Unit: Foyer	Net Price:		384.25
Qty: 1		Ext. Net Price:	USD	384.25

MARVIN

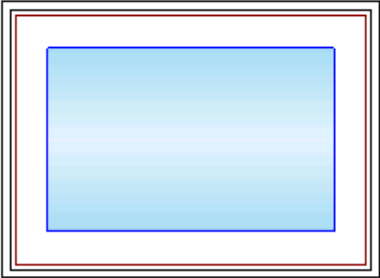

As Viewed From The Exterior

FS 24" X 17 1/8"
RO 25" X 17 5/8"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Grade
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335

Gunmetal Clad Exterior
Bare Pine Interior
Ultimate Casement - Stationary 353.48
CN 2418
Rough Opening 25" X 17 5/8"
Frame Size 24" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers
6 9/16" Jambs 30.77
Nailing Fin
*****Note: Unit Availability and Price is Subject to Change**

Initials required
Seller: _____
Buyer: _____

Line #19	Mark Unit: Den	Net Price:		2,644.63
Qty: 1		Ext. Net Price:	USD	2,644.63


MARVIN



As Viewed From The Exterior

FS 24" X 17 1/8"
RO 25" X 17 5/8"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Grade
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335

Gunmetal Clad Exterior
Bare Pine Interior
2W2H - Rectangle Assembly
Assembly Rough Opening
65" X 82 3/4" 478.70
Unit: A1
Ultimate Casement Picture
CN 4024
Rough Opening 41" X 23 5/8"
Frame Size 40" X 23 1/8"
Gunmetal Clad Sash Exterior

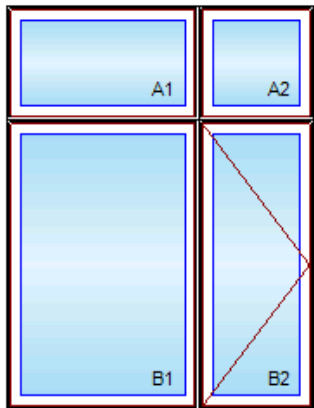

As Viewed From The Exterior

FS 64" X 82 1/4"

RO 65" X 82 3/4"

Egress Information A1, A2, B1

No Egress Information available.

Egress Information B2

Width: 16 57/64" Height: 54 1/64"

Net Clear Opening: 6.33 SqFt

Performance Information A1

U-Factor: 0.28

Solar Heat Gain Coefficient: 0.33

Visible Light Transmittance: 0.57

Condensation Resistance: 57

CPD Number: MAR-N-344-27701-00001

Performance Information A2

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.29

Visible Light Transmittance: 0.49

Condensation Resistance: 58

CPD Number: MAR-N-342-40138-00001

Performance Information B1

U-Factor: 0.28

Solar Heat Gain Coefficient: 0.33

Visible Light Transmittance: 0.57

Condensation Resistance: 57

CPD Number: MAR-N-344-27701-00001

Performance Information B2

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.29

Visible Light Transmittance: 0.49

Condensation Resistance: 58

CPD Number: MAR-N-342-40138-00001

Performance Grade A1, B1

Licensee #1016

AAMA/WDMA/CSA/101/I.S.2/A440-11

CW-PG50 1524X2515 mm (60X99 in)

Water Resistance: 7.52 psf

CW-PG50 DP +50/-50

FL31335

Performance Grade A2

Licensee #918

AAMA/WDMA/CSA/101/I.S.2/A440-11

CW-PG50 914X2442 mm (36X96.13 in)

Water Resistance: 7.5 psf

CW-PG50 DP +50/-50

FL31335

Performance Grade B2

Licensee #918

AAMA/WDMA/CSA/101/I.S.2/A440-11

CW-PG50 914X2442 mm (36X96.13 in)

Water Resistance: 7.5 psf

CW-PG50 DP +50/-50

FL31335

Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: A2 381.38

Ultimate Casement - Stationary

CN 2424

Rough Opening 25" X 23 5/8"

Frame Size 24" X 23 1/8"

Gunmetal Clad Sash Exterior

Bare Pine Sash Interior

IG - 3/4" - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Putty Exterior Glazing Profile

Ogee Interior Glazing Profile

Standard Bottom Rail

Black Weather Strip

Solid Wood Covers

Unit: B1 831.46

Ultimate Casement Picture

CN 4060

Rough Opening 41" X 59 5/8"

Frame Size 40" X 59 1/8"

Gunmetal Clad Sash Exterior

Bare Pine Sash Interior

IG - 3/4" - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Putty Exterior Glazing Profile

Ogee Interior Glazing Profile

Standard Bottom Rail

Black Weather Strip

Solid Wood Covers

Unit: B2 734.14

Ultimate Casement - Right Hand

CN 2460

Rough Opening 25" X 59 5/8"

Frame Size 24" X 59 1/8"

Gunmetal Clad Sash Exterior

Bare Pine Sash Interior

IG - 3/4" - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Putty Exterior Glazing Profile

Ogee Interior Glazing Profile

Standard Bottom Rail

Black Weather Strip

Satin Taupe Folding Handle

***Handles/Covers Ship Loose

Satin Taupe Multi - Point Lock

Extruded Aluminum Screen

Satin Taupe Surround

Bright View Mesh

***Screen/Combo Ship Loose

Standard Mull Charge 111.62

6 9/16" Jamb 107.33

Nailing Fin

***Note: Non-Certified mull: check with local code officials for project specific requirements.

***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____

Buyer: _____

Line #20	Mark Unit: MasterWardrobe	Net Price:		416.44
Qty: 1		Ext. Net Price:	USD	416.44

MARVIN 



As Viewed From The Exterior

FS 30" X 17 1/8"

RO 31" X 17 5/8"

Egress Information

No Egress Information available.

Performance Information

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.29

Visible Light Transmittance: 0.49

Condensation Resistance: 58

CPD Number: MAR-N-342-40138-00001

Performance Grade

Licensee #918

AAMA/WDMA/CSA/101/I.S.2/A440-11

CW-PG50 914X2442 mm (36X96.13 in)

Water Resistance: 7.5 psf

CW-PG50 DP +50/-50

FL31335

Gunmetal Clad Exterior

Bare Pine Interior

Ultimate Casement - Stationary 381.38
CN 3018

Rough Opening 31" X 17 5/8"

Frame Size 30" X 17 1/8"

Gunmetal Clad Sash Exterior

Bare Pine Sash Interior

IG - 3/4" - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Putty Exterior Glazing Profile

Ogee Interior Glazing Profile

Standard Bottom Rail

Black Weather Strip

Solid Wood Covers

6 9/16" Jambs 35.06

Nailing Fin

***Note: Unit Availability and Price is Subject to Change


Initials required

Seller: _____

Buyer: _____

Line #21	Mark Unit: MasterWardrobe	Net Price:		493.72
Qty: 1		Ext. Net Price:	USD	493.72

MARVIN 

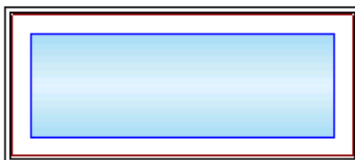

As Viewed From The Exterior

FS 40" X 17 1/8"

RO 41" X 17 5/8"

Egress Information

No Egress Information available.

Performance Information

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.29

Visible Light Transmittance: 0.49

Condensation Resistance: 58

CPD Number: MAR-N-342-40138-00001

Performance Grade

Licensee #918

AAMA/WDMA/CSA/101/I.S.2/A440-11

LC-PG50 1016X2337 mm (40X91.13 in)

Water Resistance: 7.5 psf

Gunmetal Clad Exterior

Bare Pine Interior

Ultimate Casement - Stationary 450.79
CN 4018

Rough Opening 41" X 17 5/8"

Frame Size 40" X 17 1/8"

Gunmetal Clad Sash Exterior

Bare Pine Sash Interior

IG - 3/4" - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Putty Exterior Glazing Profile

Ogee Interior Glazing Profile

Standard Bottom Rail

Black Weather Strip

Solid Wood Covers

6 9/16" Jambs 42.93

Nailing Fin

***Note: Unit Availability and Price is Subject to Change


Initials required

Seller: _____

Buyer: _____

LC-PG50 DP +50/-50
FL31335

Line #22	Mark Unit: MasterWardrobe	Net Price:		416.44
Qty: 1		Ext. Net Price:	USD	416.44

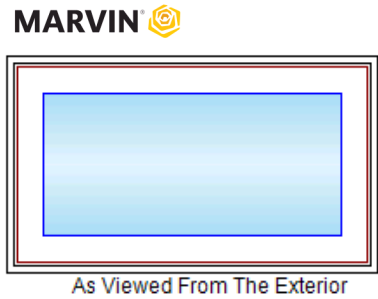

FS 30" X 17 1/8"
RO 31" X 17 5/8"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Grade
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335

Gunmetal Clad Exterior
Bare Pine Interior
Ultimate Casement - Stationary 381.38
CN 3018
Rough Opening 31" X 17 5/8"
Frame Size 30" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers
6 9/16" Jambs 35.06
Nailing Fin
*****Note: Unit Availability and Price is Subject to Change**

Initials required
Seller: _____
Buyer: _____

Line #23	Mark Unit: MasterWardrobe	Net Price:		493.72
Qty: 1		Ext. Net Price:	USD	493.72




FS 40" X 17 1/8"
RO 41" X 17 5/8"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Grade
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
LC-PG50 1016X2337 mm (40X91.13 in)
Water Resistance: 7.5 psf
LC-PG50 DP +50/-50
FL31335

Gunmetal Clad Exterior
Bare Pine Interior
Ultimate Casement - Stationary 450.79
CN 4018
Rough Opening 41" X 17 5/8"
Frame Size 40" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers
6 9/16" Jambs 42.93
Nailing Fin
*****Note: Unit Availability and Price is Subject to Change**

Initials required
Seller: _____
Buyer: _____

Line #24	Mark Unit: MasterBathRm	Net Price:		2,326.22
Qty: 1		Ext. Net Price:	USD	2,326.22

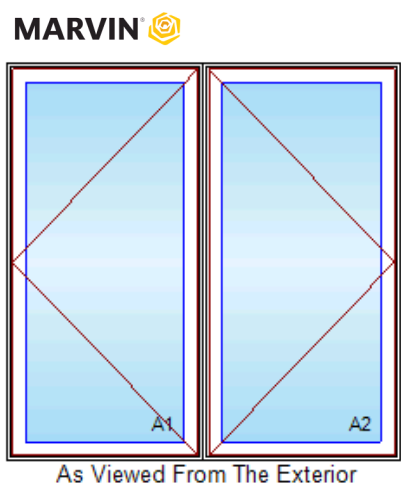

FS 60" X 59 1/8"
RO 61" X 59 5/8"
Egress Information A1, A2
Width: 22 57/64" Height: 54 1/64"
Net Clear Opening: 8.59 SqFt
Performance Information A1, A2
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1, A2
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #917
AAMA 450-10
LC-PG50 1524X2111 mm (60X83.2 in)
Water Resistance: 7.5 psf
LC-PG50 DP 50
FL13150
Performance Grade Overall Assembly
Water Resistance: 7.52 psf
LC-PG50 DP

Gunmetal Clad Exterior
Bare Pine Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
61" X 59 5/8"

Unit: A1825.02
Ultimate Casement - Left Hand
CN 3060
Rough Opening 31" X 59 5/8"
Frame Size 30" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite 275.48
Tempered Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2825.02
Ultimate Casement - Right Hand
CN 3060
Rough Opening 31" X 59 5/8"
Frame Size 30" X 59 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite 275.48
Tempered Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Satin Taupe Folding Handle
***Handles/Covers Ship Loose
Satin Taupe Multi - Point Lock
Extruded Aluminum Screen
Satin Taupe Surround
Bright View Mesh
***Screen/Combo Ship Loose


Standard Mull Charge37.21
6 9/16" Jamb 88.01
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.
***Note: Unit Availability and Price is Subject to Change

Initials required

Seller: _____

Buyer: _____

Line #25	Mark Unit: MasterBathRm	Net Price:		1,439.68
Qty: 1		Ext. Net Price:	USD	1,439.68



FS 108" X 17 1/8"
RO 109" X 17 5/8"
Egress Information A1, A2, A3
No Egress Information available.
Performance Information A1, A2, A3
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 58
CPD Number: MAR-N-342-40138-00001
Performance Information OA
Performance Grade A1, A2, A3
Licensee #918
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 914X2442 mm (36X96.13 in)
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50
FL31335
Performance Grade Mull
Licensee #1137
AAMA 450-10
LC-PG70 1197X1219 mm (47.13X48 in)
Water Resistance: 7.5 psf
LC-PG70 DP 70
FL17797
Performance Grade Overall Assembly
Water Resistance: 7.5 psf
CW-PG50 DP +50/-50

Gunmetal Clad Exterior
Bare Pine Interior
3W1H - Rectangle Assembly
Assembly Rough Opening
109" X 17 5/8"

Unit: A1424.32
Ultimate Casement - Stationary
CN 3618
Rough Opening 37" X 17 5/8"
Frame Size 36" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: A2424.32
Ultimate Casement - Stationary
CN 3618
Rough Opening 37" X 17 5/8"
Frame Size 36" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers

Unit: A3424.32
Ultimate Casement - Stationary
CN 3618
Rough Opening 37" X 17 5/8"
Frame Size 36" X 17 1/8"
Gunmetal Clad Sash Exterior
Bare Pine Sash Interior
IG - 3/4" - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Black Weather Strip
Solid Wood Covers
Standard Mull Charge74.42
6 9/16" Jamb's 92.30
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.
*****Note: Unit Availability and Price is Subject to Change**

Initials required

Seller: _____

Buyer: _____

Project Subtotal Net Price: USD	49,017.46
5.500% Sales Tax: USD	2,695.96
Project Total Net Price: USD	51,713.42

TERMS AND CONDITIONS

50% Deposit required on all replacement projects. Excludes Wells Fargo Financing and Terms Accounts.

Quote may change based on manufacturing pricing changes.
Please confirm pricing at time of order with your salesman.

INTERIOR FINISH

In the case of painted or stained interior finish, fading or change in color (per ASTM D2244), under normal interior environmental conditions. The color of wood changes, typically darkening over time, and is not a defect. The application of stains and/or clear finish does not prevent this natural process. Color change may be more noticeable in woods treated with a clear coat or light colored stain. The appearance of a raised grain or other natural variation in the wood grain may be enhanced by the interior finish and is not a defect. Interior finish is applied prior to assembly and is not intended to cover joinery seams. Products with applied primer only are not covered under this provision.

Customer are responsible for removing of interior window dressings and access to the window.

Interior Trim paint lines may not always be covered under normal installation and may not be covered under normal installation cost. Cracks outside of the trim perimeter may not be covered under normal installation and will be the responsibility of the homeowner.

Interior drapes and window blinds/coverings are the responsibility of the homeowner for removal and re-installation. The Window & Door Store does not guarantee existing window coverings will fit new windows. _____
Customer Signature

To release order please sign, date and return to:
The Window and Door Store
13819 Industrial Road
Omaha NE 68137

PRODUCT AND PERFORMANCE INFORMATION

NFRC Ratings:


NFRC energy ratings may vary depending on the exact configuration of glass thickness used on the unit. NFRC energy values and ratings may change over time due to ongoing product changes, updated test results or requirements. NFRC values and ratings are finalized on the date of manufacture.

The National Fenestration Rating Council (NFRC) has developed and operates a uniform rating system for the energy performance of fenestration products, including windows, doors and skylights. For additional information regarding this rating system, see www.nfrc.org.


Code (residential, building or energy) Compliance:

Determining the suitability and compliance with state, provincial, local, or other applicable building codes or standards, including energy codes, is the responsibility of the buyer, user, architect, contractor, installer, and/or other construction professional.

2021 IECC Climate Zone Map:

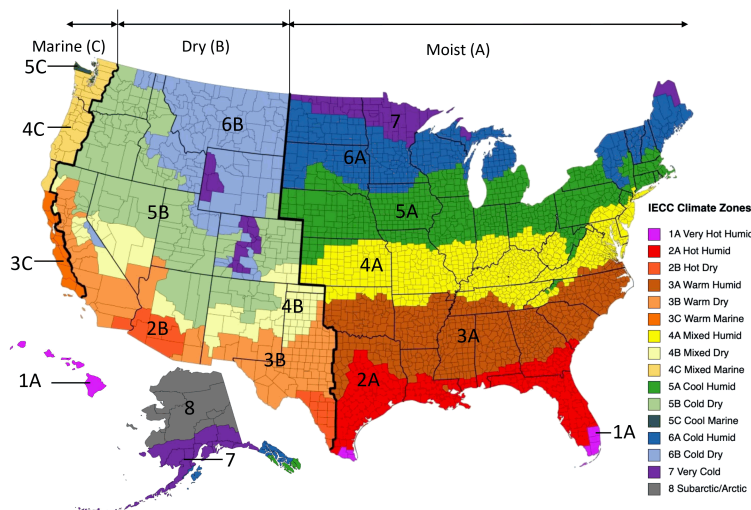

ENERGY STAR Version 7 Climate Zone Map:

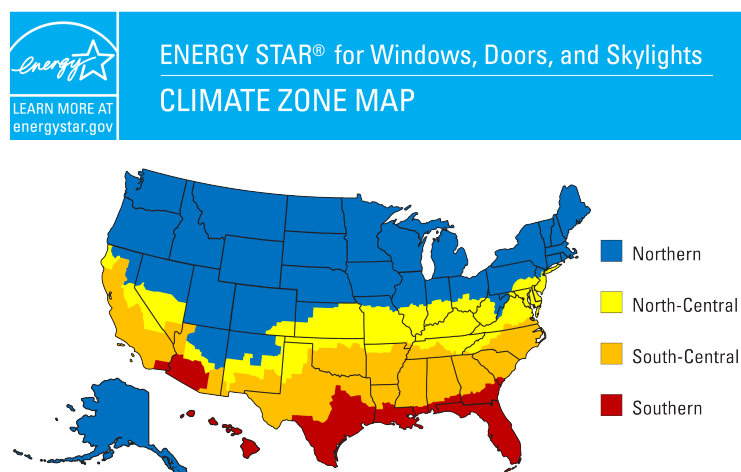

PURCHASE APPROVAL/SIGN OFF

Project Subtotal Net Price: USD 49,017.46
5.500% Sales Tax: USD 2,695.96
Project Total Net Price: USD 51,713.42

I have reviewed all line item quotes in detail and agree that the product specifications and pricing are accurate, and I approve the project for order. I acknowledge that additional charges, tax or Terms and Conditions may apply.

Seller: _____

Buyer: _____